Runa™ BQ Task Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Designed to work with the Luxor® System, this stainless steel task light illuminates outdoor grilling, kitchen, and reading areas. It can also be operated independently with an optional plug-in transformer.


Quick Facts

- Machined, stainless steel construction
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) color temperature

BQ Dimensions

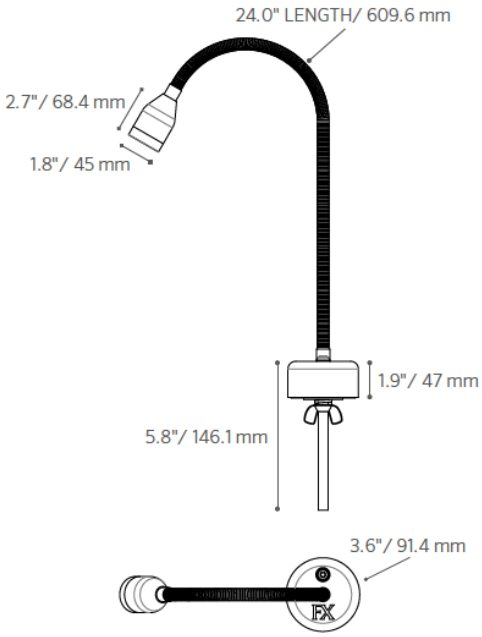

BQ Photometrics

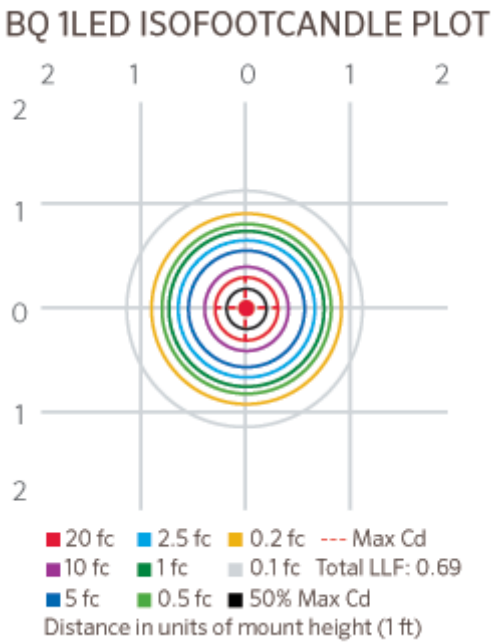

BQ Spec Chart

Number of LEDs	1
Halogen Lumen Output Equivalent	10 Watts
Useful LED Life (L70)	50,000 hrs avg
Input Voltage	10 to 15V
VA Total (Use this number to size the transformer)	2.2
Watts Used	2.0
Lumens per Watt (Efficacy)	42
Max Lumens	80
CRI (Ra)	82
CCT	3900K

ADDITIONAL CERTIFICATIONS

UL 2108, UL 8750

Model Configurator

BQ				
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	FINISH

LIGHTING ENGINE

- [ ] **Powerboard Integrated LED**

LUXOR CONTROL

- [ ] **ZD**
  Zone/Dim with Luxor

POWER

- [ ] **1LED**
  2.4 VA

FINISH

- [ ] **SS**
  Stainless Steel

Accessories

POWER

☐ 

MT-6W
Plug-In Transformer, 6 W

☐ 

ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)

☐ 

SURGE-MOD
Surge Protection Module