EX Lighting Transformer



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Provides an economical, low-wattage power and control option for LED lighting projects.

Quick Facts

- 150 watts
- Compact design
- Compatible with most plug-in astronomical timers and photocells
- Single 15-volt output tap
- Powder-coated steel or stainless steel options
- UL-1838, UL-379 compliant

EX - Dimensions

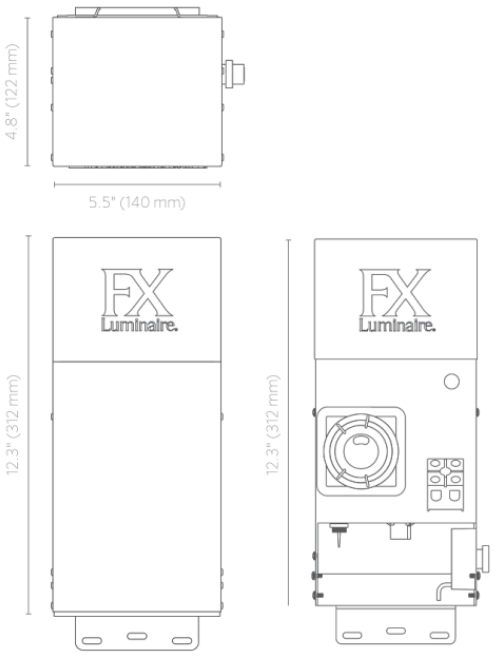

EX Transformer Spec Chart

Output		
Power	150 watts	150 watts
Input Primary	120 volts, 60 Hz	230 volts, 50/60 Hz
Input Amperage Primary	1.4 A	0.68 A
Output Voltage Secondary	14 VAC	14 VAC
Maximum Open Circuit Volts	15 VAC	15 VAC
Class	2	2

ADDITIONAL CERTIFICATIONS

UL 379, UL 1838

Model Configurator

EX			
MODEL	WATTAGE	COMPLIANCE	FINISH

WATTAGE

- ☐ **150** — 150 Watts

COMPLIANCE

- ☐ **[Default]** — Default (120V)
- ☐ **A** — Australia (RCM Certified) 230V
- ☐ **E** — International (CE Certified) 230V

FINISH

- ☐ **M** — Matte Grey
- ☐ **SS** — Stainless Steel

Accessories

POWER

☐ 

PX-SYNC
Plug-in 24VAC relay

☐ 

PX-TIMER
Lighting transformer plug-in timer

☐ 

EX-PC
Photocell - EX Transformer

☐ 

DIM-LV
Low-Voltage Dimmer

☐ 

FX-WIFI-PLUG
FX Luminaire Wi-Fi Plug