
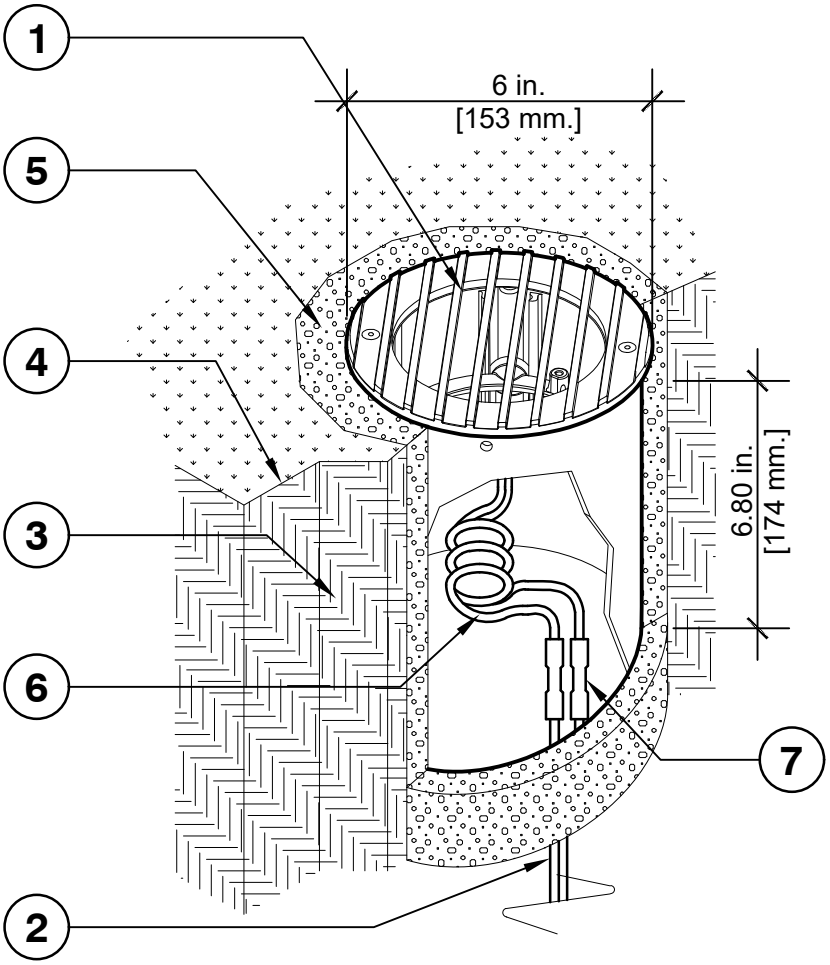


LEGEND:

1. FX LUMINAIRE CN-73 WELL LIGHT
2. POWER FEED
3. SOIL
4. FINISH GRADE
5. 1/2 " GRAVEL FOR DRAINAGE
6. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 6 in. (150 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE
7. HEAT SHRINK CONNECTION



HEAT SHRINK CONNECTION

00

FX LUMINARE CN-73 WELL LIGHT

NOT SCALE