
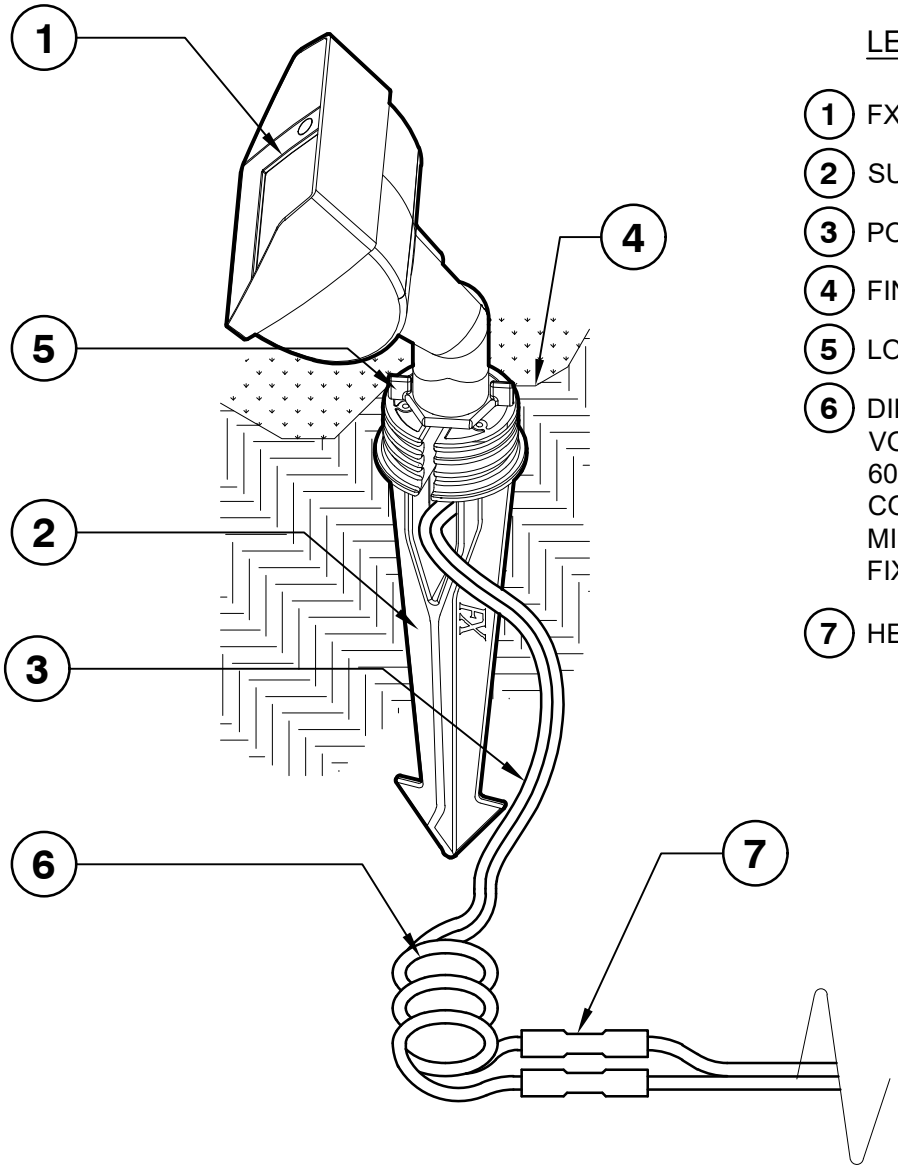


LEGEND:

1. FX LUMINAIRE CW-51 WALL WASH
2. SUPER LARGE SPIKE
3. POWER FEED
4. FINISH GRADE
5. LOCK RING
6. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 6 in. (150 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE
7. HEAT SHRINK CONNECTION



HEAT SHRINK CONNECTION

00 FX LUMINAIRE CW-51 WALL WASH

NOT SCALE