Cora™ CL-31 Ledge Light



PROJECT NAME

TYPE

CATALOG #


QUANTITY

NOTES

Quick Facts

- Select brass construction provides superior durability
- Swappable wire exit position simplifies installs and retrofits
- 10-year-warranty
- Innovative breakaway bracket offers mounting flexibility for solving installation challenges
- Open-access design enables easy maintenance
- Available in Black and Antique Bronze finishes
- Available in a warm (2700K) and soft (3000K) color temperatures.

CL31 Dimensions

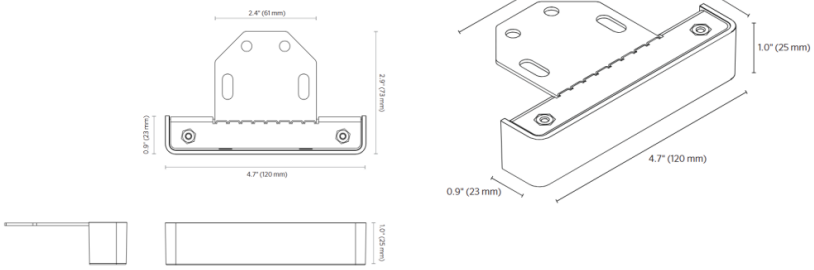

CL-31 Specification Chart

	E2W	E2S
Total Lumens (lm)	30	30
Power Consumption (VA)	1.3	1.3
Efficacy (lm/W)	22	22

	E2W	E2S
Correlated Color Temperature (CCT)	2700K	3000K
Maximum Candela (cd)	15	15
Color Rendering Index (CRI)	83+	83+
Dimming	Phase	Phase
Minimum Rated Life (L70)	33,000 Hrs	33,000 Hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	E2
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length
Sockets	G4 Bi-pin socket contains MoistureBlock™ Technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	1.2 lb
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)
Lens Transparency	Frosted

SUSTAINABILITY & MANUFACTURING

Sustainability	Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.
Installation Requirements	Designed for installation in the downward lighting direction only
Manufacturing	ISO 9001:2015 certified facility
Lifetime	33,000 Hrs
Warranty	10-year limited warranty on fixtures; 3-year limited warranty on preinstalled LED lamp

LISTINGS

Model Configurator

CL31				
MODEL	LAMP	LED COLOR	WIRE LEAD	FINISH

LAMP

- ☐ **E2**
  1.3 VA G4 LED Lamp (Eco Lamp Series)

LED COLOR

- ☐ **W**
  Warm (2700K)
- ☐ **S**
  Soft (3000K)

WIRE LEAD

- ☐ **[Default]**
  10' (3 m)
- ☐ **XL**
  26' (8 m) Lead

FINISH

- ☐ **AB**
  Antique Bronze
- ☐ **FB**
  Black

Accessories

POWER

- ☐ 
  MT-6W
  Plug-In Transformer, 6 W
- ☐ 
  ST-UV
  Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage



ST-HV
Step-Down Transformer (120V to 12V)



ST-120-DIM
Step-Down Transformer, Dimmable (120 V to 12 V)



MT-30W
Mini Plug-In Transformer, 30 W



DIM-LV
Low-Voltage Dimmer

SPLICING



WCHSBS2
Brass Lug Wire Connectors, 2-pack



WCHSBS50
Brass Lug Wire Connectors, 50-item Bulk Pack



WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small



WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium