Cora™ CN-73 Well Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Well Light, select brass construction with a low-profile linear grate design, reversible housing, and aimable PAR-36 LED Lamp

Quick Facts

- The CN-73 features a new select brass faceplate that stands up to tough outdoor conditions, resisting corrosion and wear over time for extended product life.
- It comes standard with a durable polycarbonate lens that prevents dirt, leaves, and other debris from entering the housing - reducing maintenance and protecting performance.
- The fixture uses an aimable PAR-36 Lamp that allows designers to direct light exactly where it's needed, enhancing both aesthetic control and functional coverage.
- A reversible housing lets the user choose between an angled orientation for increased glare shielding or a flat setup for a cleaner, more discreet look.
- The overall construction and configuration make the CN-73 a dependable option for demanding project sites where performance and longevity are critical.

CN73 Dimensioned Drawing

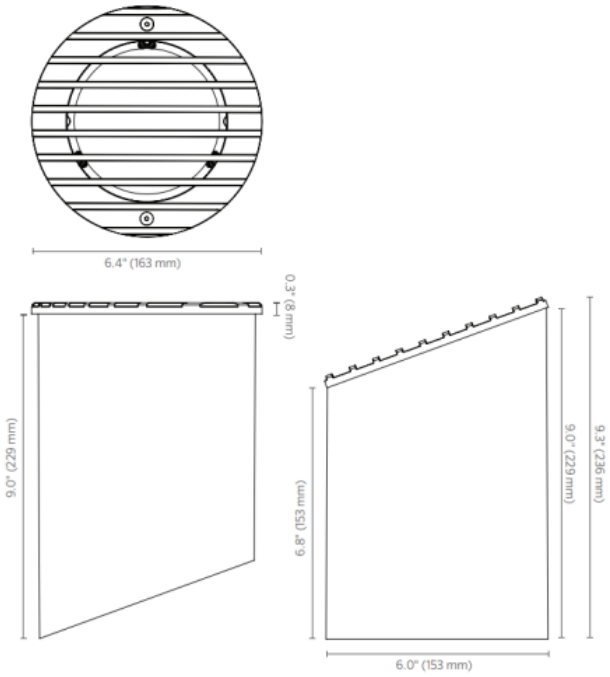

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Select brass faceplate with stainless steel hardware.
LED	E12
Adjustability	The light source offers 2.5" (64 mm) of internal height adjustability and a 20° tilt capability.
Finish	Antique Bronze finish sealed with a clear TGIC powder-coated layer or black polyester TGIC powder-coated layer, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Wiring	16 AWG (1.5 mm); SPT-2W; 220°F (105°C); 300 V; 26' (8 m) length
Sockets	Accepts standard sealed-beam PAR-36 LED Lamps equipped with bottom-positioned terminal screw connectors for direct-wire installation.

Weight	3.4 lb (1.5 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)
Lens Transparency	Clear

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the upward direction only
Manufacturing	9001:2015 ISO certified facility
Warranty	Fixture: Limited 10-year warranty Preinstalled Lamp: Limited 3-year warranty

LISTINGS

Model Configurator

CN73					
MODEL	LAMP	LED COLOR	OPTIC	STYLE	FINISH

LAMP

- ☐ **E12** — 11.3 VA PAR-36 Eco LED Lamp
- ☐ **E9** — 8.5 VA PAR-36 Eco LED Lamp
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

OPTIC

- ☐ **[Default]** — NL Lamp
- ☐ **FL** — Flood (30°)

STYLE

- [ ] **LG**
  Linear Grate

FINISH

- [ ] **AB**
  Antique Bronze
- [ ] **FB**
  Black

Accessories

POWER

- [ ] 
  MT-6W
  Plug-In Transformer, 6 W
- [ ] 
  ST-UV
  Step-Down Transformer, UV (120/277 V to 12 V)
- [ ] 
  SURGE-MOD
  Surge Protection Module
- [ ] 
  LCM-LV
  Luxor Cube - Low-Voltage
- [ ] 
  ST-HV
  Step-Down Transformer (120V to 12V)
- [ ] 
  ST-120-DIM
  Step-Down Transformer, Dimmable (120 V to 12 V)
- [ ] 
  MT-30W
  Mini Plug-In Transformer, 30 W
- [ ] 
  DIM-LV
  Low-Voltage Dimmer

SPLICING

- [ ] 
  WCHSBS2
  Brass Lug Wire Connectors, 2-pack
- [ ] 
  WCHSBS50
  Brass Lug Wire Connectors, 50-item Bulk Pack
- [ ] 
  WCHSSM20
  Heat Shrink Wire Connectors, 20-pack, Small
- [ ] 
  WCHSMD20
  Heat Shrink Wire Connectors, 20-pack, Medium