Vantage™ SP-A Petite Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

These popular aluminum path lights feature precious metals to create a sophisticated richness and elegance that enhances, but never dominates, the garden scene


Quick Facts

- Built with durable, lightweight aluminum housing that withstands any weather condition
- Compatible with the Luxor® Low-Voltage CUBE for powerline zoning and smooth dimming
- Available in a warm (2700K) color temperature
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

SP Dimensions

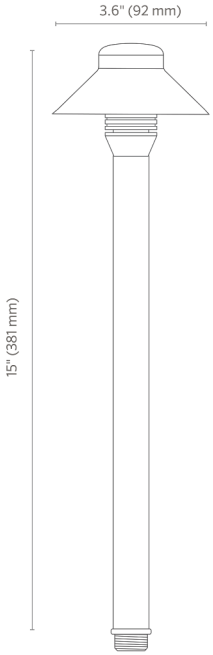

SP-A Photometrics with G4 LED Replacement

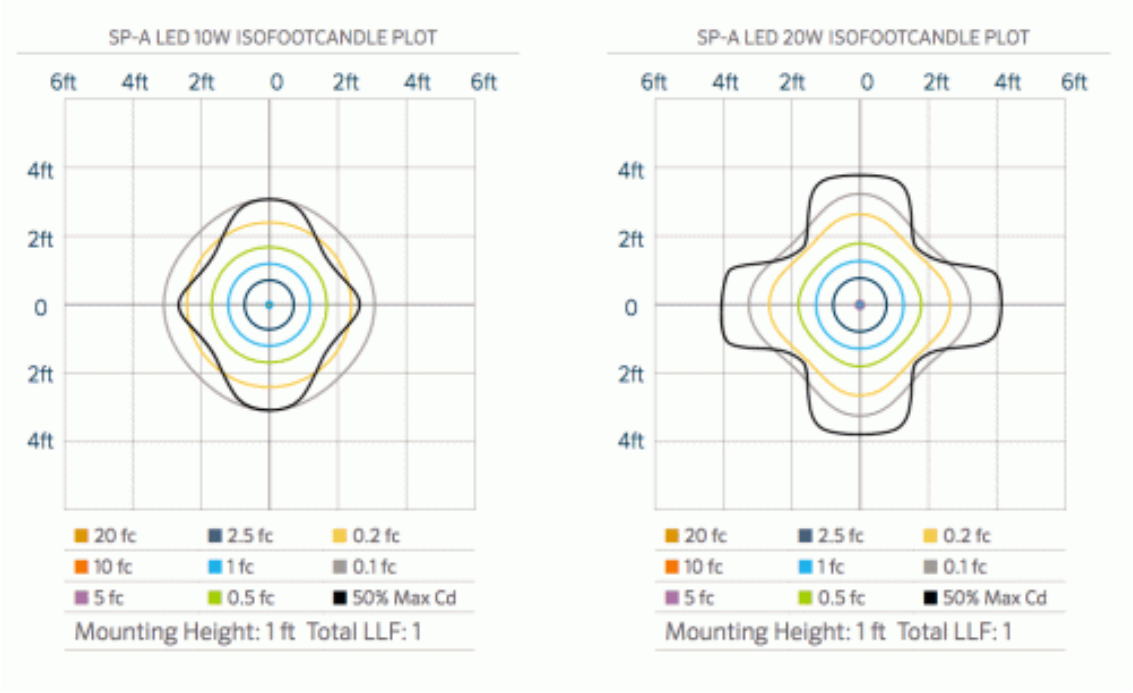

SPA Spec Chart

Output	NL (No Lamp)	LED20W
Total Lumens		35
Input Voltage	10 to 15v	11 to 15v
Power Consumption (VA)		1.3
Lumens per Watt (Efficacy)		30
CRI (Ra)		81
Dimming	PWM, Phase**	Phase*
Luxor Compatibility		
ZD Option		Use Luxor Cube (LCM-LV)
Minimum Rated Life (Hrs, L70)		33,000 Hrs

**For optimal performance, use trailing edge phase cut dimmer.

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	E2

LISTINGS

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

SPA				
MODEL	LAMP	LED COLOR	RISER	FINISH

LAMP

☐ **E2** 1.3 VA G4 LED Lamp (Eco Lamp Series)	☐ **LED20** 1.3 VA G4 Lamp (20W equivalent Lamp)

LED COLOR

- **W** Warm (2700K)
- **S** Soft (3000K)

RISER

- **12R** 12'' Riser
- **18R** 18'' Riser

FINISH

- **BZ** Bronze Metallic
- **FB** Black
- **SB** Sedona Brown
- **DG** Desert Granite
- **WI** Weathered Iron
- **FW** Flat White
- **SV** Silver

Accessories

MOUNTING



PM-XX* PM
Post Mount



GM-XX* GM
Ground Mount with ½" Thread



VB-050-XX* VB-050
VersaBox® Mount with ½" Thread



MJB-050-XX* MJB-050
Mini J-Box for ½" Thread



753900
Super Slot Spike



250015840000
Long Slot Spike



SJ-XX* SJ
Super J-Box Spike

YY*-R-XX*
Aluminum Riser, ¾" Diameter

POWER



LCM-LV

Luxor Cube - Low-Voltage



LCM-RLY010V

Luxor Cube - Relay, 0-10V dimming