Stella™ DM Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Engineered for mid-sized landscapes, these durable, copper path lights combine the earthy beauty of metals with the modernity of architectural design.


Quick Facts

- Premium, corrosion-resistant copper and brass construction protects internal and external elements of the fixture
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options

DM Dimensions

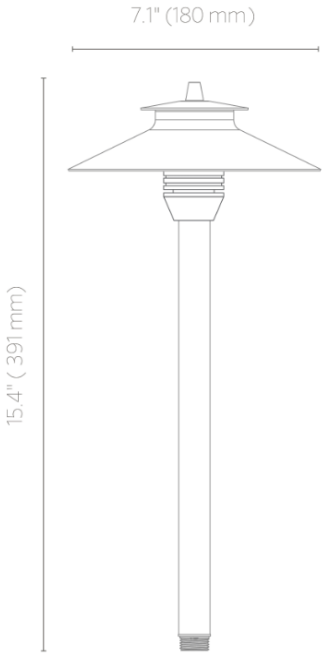

DM Photometrics (Lamped)

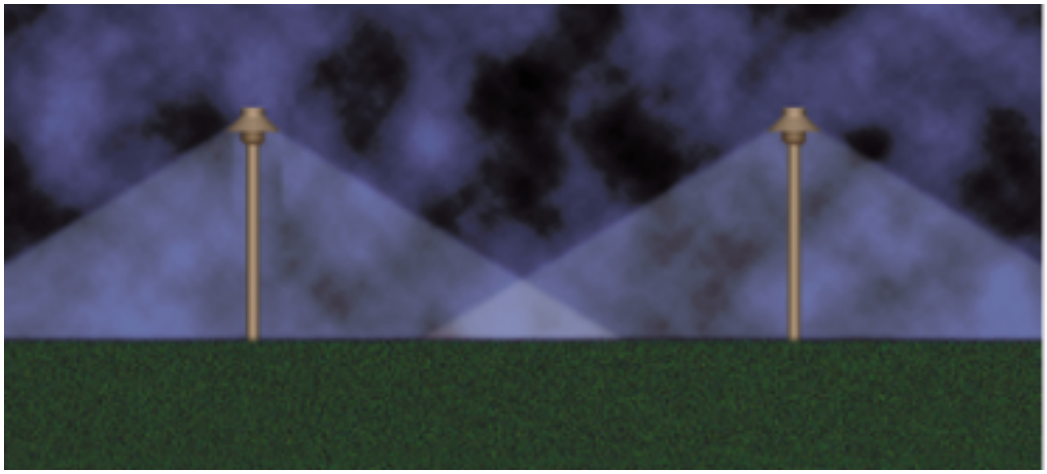



DM Spec Chart (Lamped)

Output	LED20W	E2
Total Lumens†	40-85	40-85
Power Consumption (VA)	1.3	1.3
Efficacy (lm/W)	36	36
Correlated Color Temperature (CCT)	2700K	2700K

Output	LED20W	E2
Color Rendering Index (CRI)	83	83
Input Voltage	10 to 15V	10 to 15V
Control	Dimming*	Dimming*
Rated Life (L70)	33,000	33,000

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K)

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	E2

LISTINGS

Required accessory for CE compliance: GM-XX

Model Configurator

DM					
MODEL	LAMP	LED COLOR	OPTIC	RISER	FINISH

LAMP

- **E2** — 1.3 VA G4 LED Lamp (Eco Lamp Series)
- **LED20** — 1.3 VA G4 Lamp (20W equivalent Lamp)
- **NL** — Lamp Not Included

LED COLOR

- **[Default]** — No Lamp
- **W** — Warm (2700K)
- **S** — Soft (3000K)

OPTIC

- **[Default]** — NL Lamp

RISER

- **12R** — 12'' Riser
- **18R** — 18'' Riser
- **24R** — 24'' Riser

FINISH

- **AB** — Antique Bronze
- **CU** — Natural Copper

Accessories

MOUNTING



PM-XX* PM
Post Mount



GM-XX* GM
Ground Mount with ½" Thread



VB-050-XX* VB-050
VersaBox® Mount with ½" Thread



753900
Super Slot Spike



250015840000
Long Slot Spike



250020020000
Three-Prong Spike



VHR-UL VHRUL
Variable Height Riser for Up Lights



SJ-XX* SJ
Super J-Box Spike



PARS
ProAim® Ratcheting Spike

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage