Cora™ CA-73 Luz decorativa



PROJECT NAME


TYPE

CATALOG #


QUANTITY

NOTES

CA-73 Dimensions

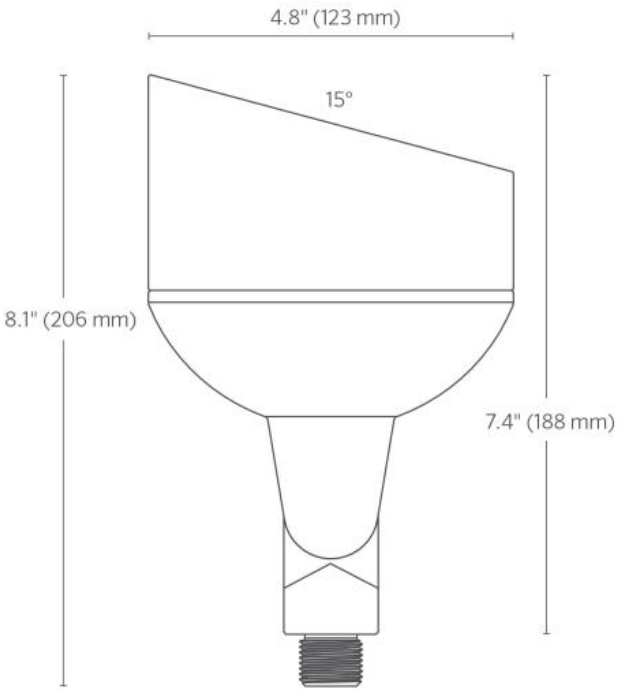

CA-73 Photometrics

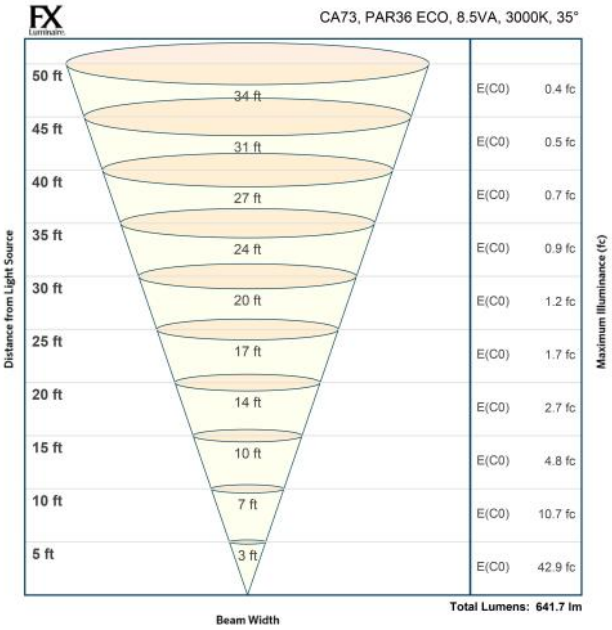

CA-73 Specification Chart

Light Source	E9	E12
Total Lumens (lm)	640	800
Power Consumption (VA)	8.5 VA	11.3 VA
Efficacy (lm/W)	110	90
Correlated Color Temperature (CCT)	2700K, 3000K	2700K, 3000K
Beam Angle	35°	35°
Maximum Candela (cd)	1,075	1,330
Color Rendering Index (CRI)	85+	85+
Input Voltage (V)	10 to 15	10 to 15
Minimum Rated Life (L70)	50,000 hrs	50,000 hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Placa frontal de latón de primera calidad con herrajes de acero inoxidable
Threads	½"-14 NPSM
Adjustability	Las funciones de compresión y bloqueo evitan el deslizamiento después de la instalación. Ofrece incrementos de 9° de ajuste sobre 220° de alineación vertical.
Finish	Acabado en bronce envejecido sellado con una capa transparente de recubrimiento en polvo TGIC o una capa negra de recubrimiento en polvo TGIC de poliéster, lo que proporciona una resistencia superior a las condiciones meteorológicas exteriores en cualquier circunstancia. Probado según las normas ASTM.
Hardware	Herrajes de acero inoxidable
Wiring	18 AWG (1 mm); SPT-1W; 220°C); 105 V; 300 m de longitud, medida desde la apertura de la luminaria
Sockets	Compatible con lámparas LED PAR-36 de haz sellado estándar, equipadas con conectores de tornillo en la parte inferior para una instalación con cableado directo
Glare Control	Protector antideslumbramiento con ángulo de 15°, deflector hexagonal preinstalado
Ambient Operating Temperature	-18 a 66 °C (0 a 140 °F)
Lens Transparency	TRANSPARENTE

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Diseñado para su instalación solo en dirección ascendente
Manufacturing	Instalación certificada por la ISO 9001:2015
Lifetime	La clasificación L70 cumple con las normas IES LM-80/TM-21, que prevén un mantenimiento del lumen del 70 % de la potencia inicial.
Warranty	Luminaria: garantía limitada de 10 años Lámpara: garantía limitada de 3 o 5 años, dependiendo de la opción de lámpara preinstalada

LISTINGS

Accessories

MOUNTING

- ☐  **250015840000**
  Long Slot Spike
- ☐  **250020020000**
  Three-Prong Spike
- ☐  **250030410000SP**
  Lock Ring
- ☐  **BM-050-C-AB**
  Bracket Mount
- ☐  **eKitSpike**
  CE Certified Spike
- ☐  **GM-XX*** GM
  Ground Mount with ½" Thread
- ☐  **LS6054**
  2.5'' Post Mount with Stabilizer
- ☐  **MJB-050-XX*** MJB-050
  Mini J-Box for ½" Thread
- ☐  **PARS**
  ProAim® Ratcheting Spike
- ☐  **PM-XX*** PM
  Post Mount
- ☐  **RSR-S-125-XX*-R-MF-B-AB** RSRS125MFBAB
  1.25" (32MM) Select Brass Riser
- ☐  **SJ-XX*** SJ
  Super J-Box Spike
- ☐  **VB-050-XX*** VB-050
  VersaBox® Mount with ½" Thread
- ☐  **VHR-UL** VHRUL
  Variable Height Riser for Up Lights

POWER

- ☐  **DIM-LV**
  Low-Voltage Dimmer
- ☐  **DX150M**



DX150SS



DX300M



LCM-LV
Luxor Cube - Low-Voltage



MT-30W
Mini Plug-In Transformer, 30 W



MT-6W
Plug-In Transformer, 6 W



PX-300-SS



PX-600-SS



PX-900-SS



ST-120-DIM
Step-Down Transformer, Dimmable (120 V to 12 V)



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module

SPLICING



WCHSBS2
Brass Lug Wire Connectors, 2-pack



WCHSBS50
Brass Lug Wire Connectors, 50-item Bulk Pack



WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium



WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small



WCHSTOOL
Ratcheting Crimper Tool