C-WWL Cobertura de pared



PROJECT NAME


TYPE

CATALOG #

QUANTITY

NOTES

C-WWL Dimensions

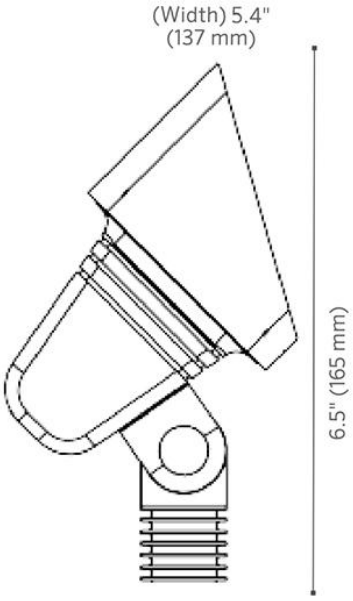

C-WWL Wall Wash 35W Photometrics

*C-WWL35*WFL Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 113°	Horizontal 111°
4' (1.2 m)	11.6 fc (125 lx)	3.8' (1.2 m)	3.9' (1.2 m)
8' (2.4 m)	2.9 fc (31 lx)	7.5' (2.3 m)	7.7' (2.4 m)
12' (3.7 m)	1.3 fc (14x)	11.3' (3.4 m)	11.6' (3.5 m)
16' (4.9 m)	0.7 fc (8 lx)	15.1' (4.6 m)	15.5' (4.7 m)
20' (6.1 m)	0.5 fc (5.4 lx)	18.8' (5.7 m)	19.4' (5.9 m)
24' (7.3 m)	0.3 fc (3.3 lx)	22.6' (6.9 m)	23.2' (7.1 m)

C-WWL Wall Wash 50W Photometrics

*C-WWL50*WFL Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 47°	Horizontal 48°
4' (1.2 m)	15.0 fc (162 lx)	3.5' (1.1 m)	3.6' (1.1 m)
8' (2.4 m)	3.8 fc (41 lx)	7.0' (2.1 m)	7.1' (2.2 m)
12' (3.7 m)	1.7 fc (18 lx)	10.5' (3.2 m)	10.7' (3.3 m)
16' (4.9 m)	0.9 fc (10 lx)	14.0' (4.3 m)	14.2' (4.3 m)
20' (6.1 m)	0.6 fc (7 lx)	17.5' (5.3 m)	17.8' (5.4 m)
24' (7.3 m)	0.4 fc (4 lx)	21.0' (6.4 m)	21.4' (6.5 m)

C-WWL Spec Chart

OUTPUT	LED-35W-FL	LED-50W-FL

Total Lumens	183	218
Input Voltage	10-15V	10-15V
Input Power (W)	5.0	6.0
VA	5.4	6.2
Efficacy (Lumens/Watt)	54	59
Color Rendering Index (CRI)	80+	80+
Center Beam Candlepower		
Flood (43)	186	241
Dimming	PWM, Phase**	PWM, Phase**
RGBW Available	No	No
Luxor Compatibility		
Default	--	--
ZD Option	--	--
ZDC Option	--	--
Minimum Rated Life (L70)	40,000 Hrs	40,000 Hrs

** For optimal performance, use a trailing-edge, phase-cut dimmer.

Accessories

POWER



LCM-LV

Luxor Cube - Low-Voltage