Cora™ CP-L Path Light




PROJECT NAME
TYPE
CATALOG #
QUANTITY
NOTES

Made with durable, select brass, these compact path lights are the perfect additions to projects for budget-conscious clients. Due to their corrosionresistant construction, they're especially at home in coastal regions.

Quick Facts


- Select brass construction and black oxide stainless steel hardware delivers strong corrosion resistance, increased durability, and an elegant look
- Compatible with the Luxor® Low-Voltage CUBE for powerline zoning and smooth dimming
- Available in a warm (2700K) color temperature
- Antique bronze finish provides increased durability and elegant look

C-PL Dimensions

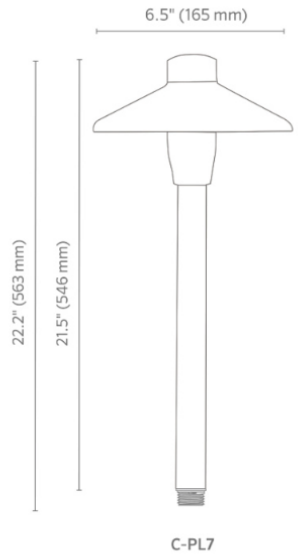

C-PL7

CP-L Photometrics

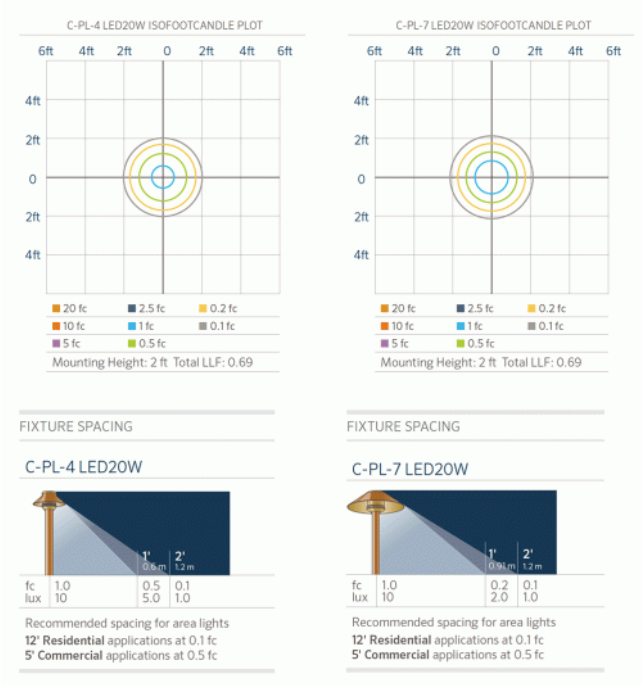

CP-L Spec Chart

Lamp	LED-20W
Halogen Lumen Output Equivalent	20W

Minimum Rated Life (L70)	33,000 hrs
Input Voltage	10 to 15V
Power Consumption (VA)	1.3
Total Lumens	35
Lumens per Watt (Efficacy)	30
CRI (Ra)	80+
Dimming	Phase
Luxor Compatibility	
ZD Option	Use Luxor Cube (LCM-LV)

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

CPL7					
MODEL	POWER	LAMP	LED COLOR	RISER	FINISH

POWER

- [ ] **[Default]**
  Default ZDC Option 6.0W/7.2VA

LAMP

- [ ] **LED20**
  1.3 VA G4 Lamp (20W equivalent Lamp)

LED COLOR

- [ ] **W**
  Warm (2700K)

RISER

- [ ] **18R**
  18" Riser

FINISH

- [ ] **AB**
  Antique Bronze

Accessories

MOUNTING

- [ ] 
  PM-XX* PM
  Post Mount

- [ ] 
  VB-050-XX* VB-050
  VersaBox® Mount with ½" Thread

- [ ]  **MJB-050-XX*** MJB-050
  Mini J-Box for ½" Thread
- [ ]  **753900**
  Super Slot Spike
- [ ]  **250015840000**
  Long Slot Spike
- [ ]  **250020020000**
  Three-Prong Spike
- [ ]  **SJ-XX*** SJ
  Super J-Box Spike
- [ ]  **PARS**
  ProAim® Ratcheting Spike

POWER

- [ ]  **EX-PC**
  Photocell - EX Transformer
- [ ]  **DIM-LV**
  Low-Voltage Dimmer
- [ ]  **DX150M**
- [ ]  **DX150SS**
- [ ]  **DX300M**
- [ ]  **DX300SS**
- [ ]  **EX-150-M**
- [ ]  **EX-150-SS**

SPLICING

- [ ]  **WCHSBS2**
  Brass Lug Wire Connectors, 2-pack
- [ ]  **WCHSBS50**
  Brass Lug Wire Connectors, 50-item Bulk Pack
- [ ]  **WCHSSM20**
  Heat Shrink Wire Connectors, 20-pack, Small
- [ ]  **WCHSMD20**
  Heat Shrink Wire Connectors, 20-pack, Medium