Cora™ C-UL Standard Plus



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Well Light, select brass construction with a low-profile linear grate design, reversible housing, and aimable PAR-36 LED Lamp

Quick Facts

- Select brass construction and black oxide stainless steel hardware delivers strong corrosion resistance, increased durability, and an elegant look
- Built-in angled glare-control for maximum comfort in the space
- Fixed-position lamp lowers light source and offers additional room for lens accessories
- Antique bronze finish provides increased durability and elegant look

C-UL Dimensions

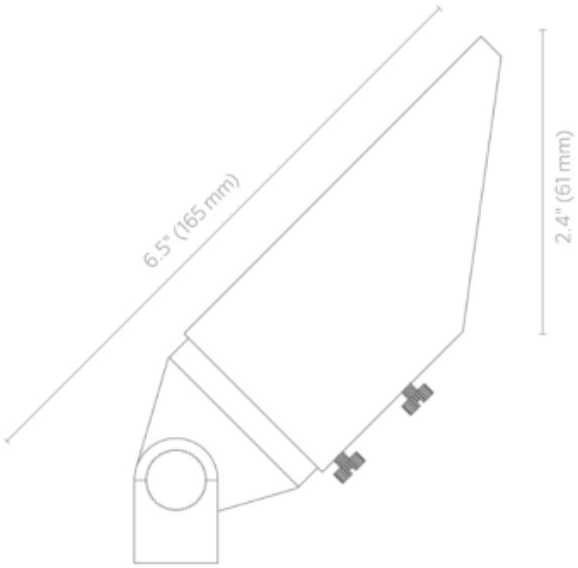

C-UL Photometrics

C-UL LED20W Illuminance at a Distance

Feet	Center Beam	Beam Width	
		Vertical 27.1°	Horizontal 27.5°
5 ft	27.0 fc	2.4 ft	2.4 ft
10 ft	6.7 fc	4.8 ft	4.9 ft
15 ft	3.0 fc	7.2 ft	7.3 ft
20 ft	1.7 fc	9.6 ft	9.8 ft
25 ft	1.1 fc	12.1 ft	12.2 ft
30 ft	0.8 fc	14.5 ft	14.7 ft



C-UL LED35W Illuminance at a Distance

Feet	Center Beam	Beam Width	
		Vertical 29.7°	Horizontal 30.3°
5 ft	33.8 fc	2.6 ft	2.7 ft
10 ft	8.5 fc	5.3 ft	5.4 ft
15 ft	3.8 fc	7.9 ft	8.1 ft
20 ft	2.1 fc	10.6 ft	10.8 ft
25 ft	1.4 fc	13.2 ft	13.5 ft
30 ft	0.9 fc	15.9 ft	16.3 ft



C-UL Spec Chart

Lamp	LED20W	LED35WFL	ZD35WFL
Halogen Lumen Output Equivalent	20W	35W	35W
Minimum Rated Life (L70)	40,000 hrs	40,000 hrs	40,000 hrs
Input Voltage	10 to 15V	10 to 15V	10 to 15V
Input Power	4.0W	5.0W	5.0W
VA (Use this number to size the transformer)	4.2W	5.3W	5.3W
Total Lumens	180	250	250
Lumens per Watt (Efficacy)	45	56	56
CRI (Ra)	80+	80+	80+
Center Beam Candle Power (CBCP)	675	845	845
Dimming	Phase	Phase	Phase, PWM
Luxor Compatibility			
ZD Option	--	--	Zoning/Dimming

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

CUL					
MODEL	LAMP	LED COLOR	OPTIC	GLARE CONTROL	FINISH

LAMP

- ☐ **LED20** — 4.3 VALED MR-16 Lamp (PRO Lamp Series)
- ☐ **LED35** — 5.4 VA LED MR-16 Lamp (PRO Lamp series)
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)

OPTIC

- [ ] **[Default]** NL Lamp
- [ ] **FL** Flood (35°)

GLARE CONTROL

- [ ] **AS** Adjustable Shroud

FINISH

- [ ] **AB** Antique Bronze

Accessories

MOUNTING

- [ ]  **PM-XX*** PM — Post Mount
- [ ]  **GM-XX*** GM — Ground Mount with ½" Thread
- [ ]  **VB-050-XX*** VB-050 — VersaBox® Mount with ½" Thread
- [ ]  **MJB-050-XX*** MJB-050 — Mini J-Box for ½" Thread
- [ ]  **753900** — Super Slot Spike
- [ ]  **250015840000** — Long Slot Spike
- [ ]  **250020020000** — Three-Prong Spike
- [ ]  **VHR-UL** VHRUL — Variable Height Riser for Up Lights
- [ ]  **SJ-XX*** SJ — Super J-Box Spike
- [ ]  **GM-SS** — Gutter Mount
- [ ]  **PARS** — ProAim® Ratcheting Spike
- [ ]  **eKitSpike** — CE Certified Spike



BM-050-C-AB
Bracket Mount



LG-NF
LG Lite Guard



RSR-S-125-XX*-R-MF-B-AB RSRS125MFBAB
1.25" (32MM) Select Brass Riser

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage



ST-120-DIM
Step-Down Transformer, Dimmable (120 V to 12 V)



MT-30W
Mini Plug-In Transformer, 30 W



DIM-LV
Low-Voltage Dimmer

SPLICING



WCHSBS2
Brass Lug Wire Connectors, 2-pack



WCHSBS50
Brass Lug Wire Connectors, 50-item Bulk Pack



WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small



WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium