
Vantage™ DM-A Path Light

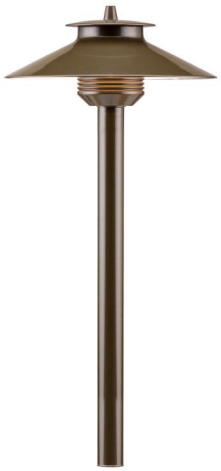

PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

These popular aluminum path lights feature precious metals to create a sophisticated richness and elegance that enhances, but never dominates, the garden scene


Quick Facts


- Built with durable, lightweight aluminum housing that withstands any weather condition
- Compatible with the Luxor® Low-Voltage CUBE for powerline zoning and smooth dimming
- Available in a warm (2700K) color temperature
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

DM Dimensions

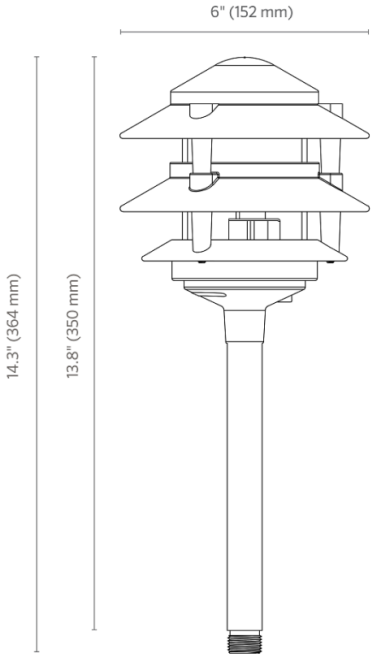

DM-A Photometrics

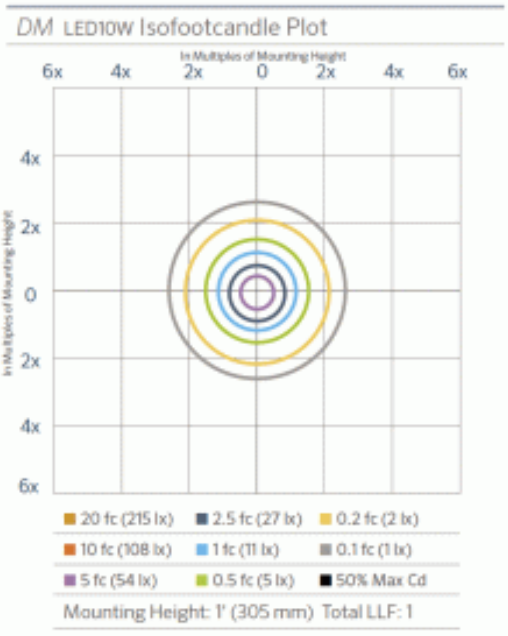

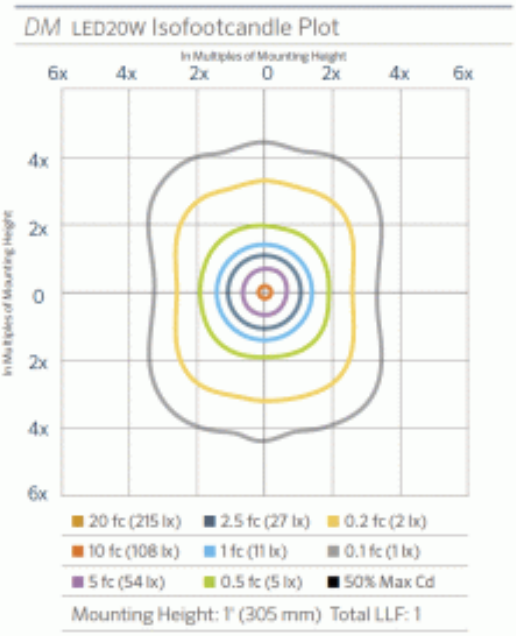

DM-A Spec Chart

Output	1LED	3LED	3LEDT	ZDC

Total Lumens†	70-85	170-210	55-75	70-100
Input Voltage	10 to 15V	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	2.0	4.2	4.2	6.0
VA	2.2	4.5	4.5	7.2
Efficacy (Lumens/Watt)	18	22	21	23
Color Rendering Index (CRI)	80	80	--	85
Max Candela	11	33	37	23
Dimming	PWM, Phase**	PWM, Phase**	PWM, Phase**	PWM, Phase**
RGBW Available	No	No	No	Yes
Luxor Compatibility				
Default	Zoning	Zoning	--	--
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	Zoning/Dimming/Color
Minimum Rated Life (L70)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs

** For optimal performance, use a trailing-edge, phase-cut dimmer.
† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K)

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Model Configurator

DMA					
MODEL	LIGHTING ENGINE	LAMP	LED COLOR	RISER	FINISH

LIGHTING ENGINE

- ☐ **G4**

LAMP

- ☐ **LED20**
  1.3 VA G4 Lamp (20W equivalent Lamp)

LED COLOR

- ☐ **W**
  Warm (2700K)

RISER

- ☐ **12R**
  12'' Riser
- ☐ **18R**
  18'' Riser
- ☐ **24R**
  24'' Riser

FINISH

- ☐ **BZ**
  Bronze Metallic
- ☐ **FB**
  Black
- ☐ **SB**
  Sedona Brown
- ☐ **DG**
  Desert Granite
- ☐ **WI**
  Weathered Iron
- ☐ **FW**
  Flat White
- ☐ **SV**
  Silver

Accessories

MOUNTING

☐ 
PM-XX* PM
Post Mount

☐ 
GM-XX* GM
Ground Mount with ½" Thread

☐ 
VB-050-XX* VB-050
VersaBox® Mount with ½" Thread

☐ 
MJB-050-XX* MJB-050
Mini J-Box for ½" Thread

☐ 
753900
Super Slot Spike

☐ 
250015840000
Long Slot Spike

☐ 
250020020000
Three-Prong Spike

☐ 
VHR-UL VHRUL
Variable Height Riser for Up Lights

☐ 
SJ-XX* SJ
Super J-Box Spike

☐ 
YY*-R-GT-XX*
1.0" (25 mm) Copper Riser for GT Path Light

☐ 
PARS
ProAim® Ratcheting Spike

POWER

☐ 
MT-6W
Plug-In Transformer, 6 W

☐ 
ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)

☐ 
SURGE-MOD
Surge Protection Module

☐ 
LCM-LV
Luxor Cube - Low-Voltage