
Modern™ MP-40 Path Light

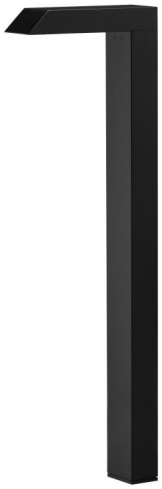

PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Sleek and contemporary, this path light provides directional light onto walkways and paths with minimalist aesthetics.

Quick Facts


- Crafted from sturdy die-cast and extruded aluminum, ensuring resilience and longevity
- Extra-long, standard conduit with stabilizer enables ground mounting in any environment
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences


MP-40 Dimensions

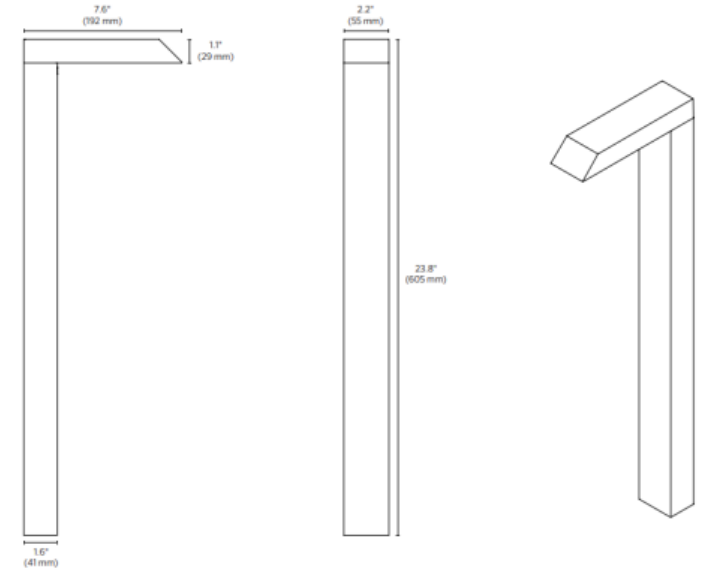


Side View BackView Iso View

MP-40 Photometrics

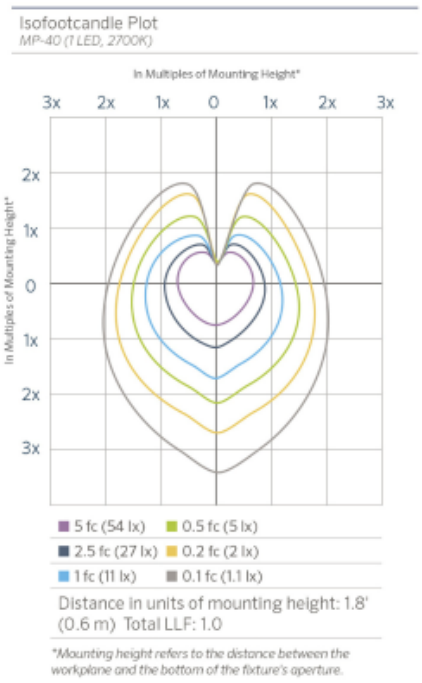

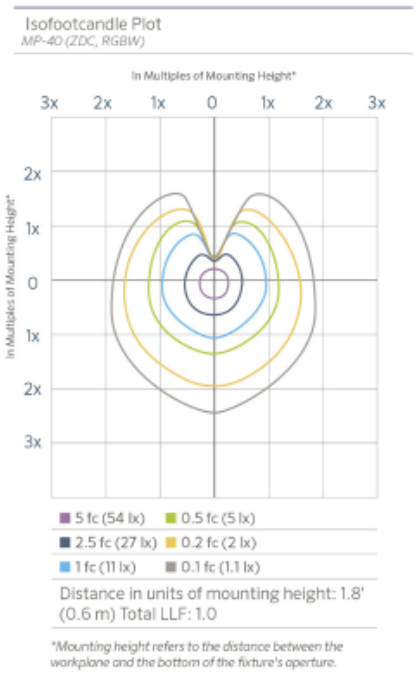

MP-40 Fixture Spacing

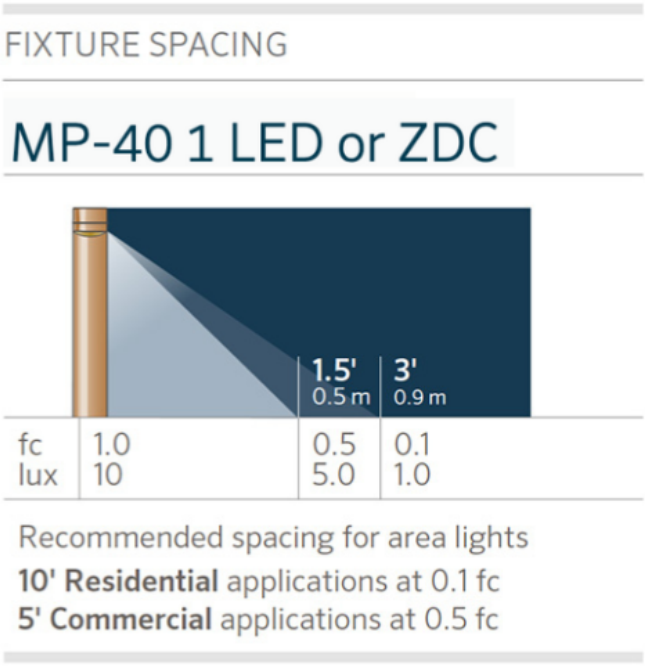

MP-40 Spec Chart

Lamp	1LED	ZDC
Halogen Lumen Output Equivalent	10W	20W
Input Voltage	10 to 15V	11 to 15V
VA Total (Use this number to size the transformer)	2.2	4.3
Watts Used	2.0	3.6
Lumens per Watt (Efficacy)	36	21
Max Lumens	115	40-85
CRI (Ra)	83	82
Center Beam Candlepower (CBCP)	85	25
Dimming	PWM, Phase**	PWM, Phase**
RGBW Available	No	Yes
Luxor® Compatibility		
Default	Zoning	Zoning

Lamp	1LED	ZDC
ZD Option	Zoning/Dimming	Zoning/Dimming
ZDC Option	N/A	Color
Minimum Rated Life (L90)	50,000 Hrs	50,000 Hrs
CCT		
Pre-installed	2700K	N/A
LED Board Ordered Seperately (755904)	3900K	N/A

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast aluminum A380 housing and extruded riser with stainless steel hardware.
Optics	Polycarbonate color temperature adjustment lenses included with luminaire: 2,700K (preinstalled) and 3,900K (clear lens). Color temperature lenses are field serviceable.
Finish	Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Hardware	Tamper-resistant stainless steel hardware. Ships with 30" (762 mm) length of 11/4" (32 mm) conduit.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the luminaire.
Weight	3.2 lbs. (1.45 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the downward lighting direction only.

LISTINGS

Model Configurator

MP40					
MODEL	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor
- ☐ **ZDC** Zone/Dim/Color with Luxor

POWER

- ☐ **1LED** 2.4 VA
- ☐ **[Default]** No Power Selection

LED COLOR

- ☐ **[Default]** Default ZDC option 11.0 VA
- ☐ **W** Warm (2700K)
- ☐ **S** Soft (3000K)
- ☐ **T** Wildlife-Friendly (585 to 595 nm)

COMPLIANCE

- ☐ **[Default]** North America (UL Listed)
- ☐ **E** International (CE Certified)

FINISH

- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White

- [ ] **SV**
  Silver

Accessories

MOUNTING

- [ ] 
  M-PL-DM-XX* M-PL-DM
  Deck Mount for MP-40 and M-PK Modern Path Lights

- [ ] 
  CSKIT-MPL
  Conduit Stabilizer for M-PJ, M-PK, MP-40, and M-PZ Modern Path Lights

POWER

- [ ] 
  MT-6W
  Plug-In Transformer, 6 W

- [ ] 
  ST-UV
  Step-Down Transformer, UV (120/277 V to 12 V)

- [ ] 
  SURGE-MOD
  Surge Protection Module

- [ ] 
  LCM-LV
  Luxor Cube - Low-Voltage

- [ ] 
  ST-HV
  Step-Down Transformer (120V to 12V)

- [ ] 
  ST-120-DIM
  Step-Down Transformer, Dimmable (120 V to 12 V)

- [ ] 
  MT-30W
  Mini Plug-In Transformer, 30 W

- [ ] 
  DIM-LV
  Low-Voltage Dimmer