Vantage™ WS Wall Wash



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The rounded, minimalist features of this versatile fixture make it perfect for any lighting design.

Quick Facts

- Built with durable, lightweight aluminum housing that withstands any weather condition
- Delivers soft wash and seamless transitions for enhanced uniformity and a more pleasant visual experience
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Built-in angled glare-control for maximum comfort in the space
- Available in a warm (2700K) and soft (3000K) color temperature.
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

WS Dimensions

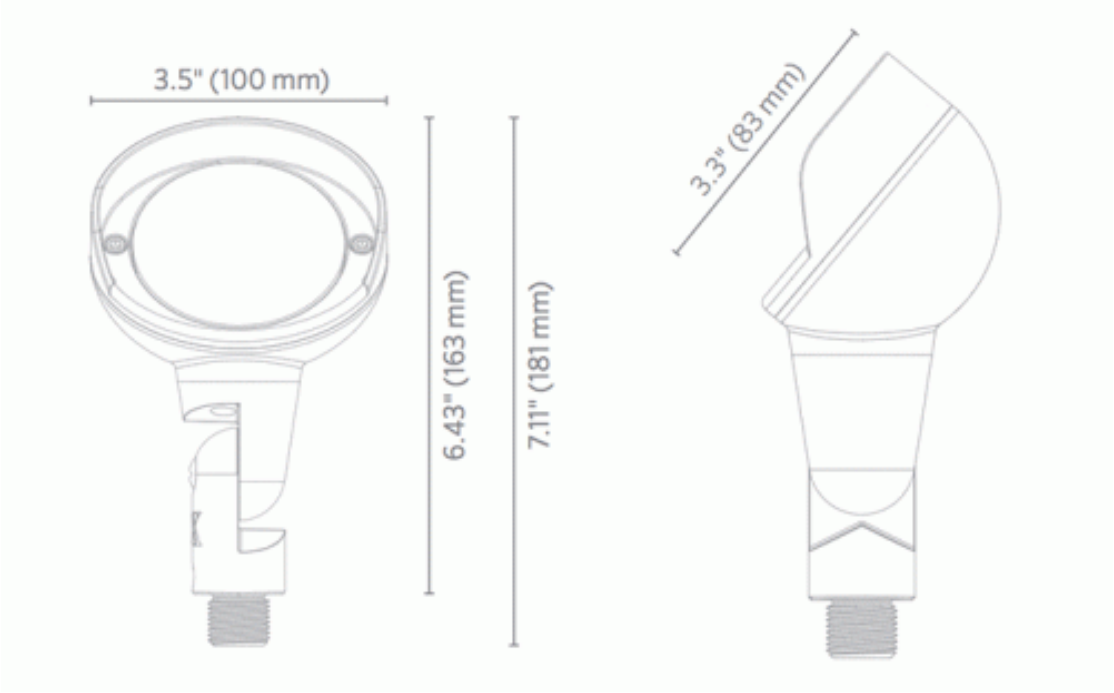

WS Photometrics

WS LED20W Illuminance at a Distance

Feet	Center Beam	Beam Width	
		Vertical 80.0°	Horizontal 90.0°
3' (0.9 m)	3.0 fc (30 lx)	5.1' (1.6 m)	6.0' (1.8 m)
6' (1.8 m)	0.8 fc (8 lx)	10.2' (3.2 m)	12.0' (3.7 m)
9' (2.7 m)	0.3 fc (3 lx)	15.3' (4.7 m)	18.0' (5.5 m)
12' (3.7 m)	0.2 fc (2 lx)	20.4' (6.2 m)	24.0' (7.3 m)
15' (4.6 m)	0.1 fc (1 lx)	26.0' (7.9 m)	30.0' (9.1 m)
18' (5.5 m)	0.1 fc (1 lx)	31.0' (9.4 m)	36.0' (11.0 m)

WS LED35W Illuminance at a Distance

Feet	Center Beam	Beam Width	
		Vertical 80.0°	Horizontal 85.0°
3' (0.9 m)	3.3 fc (33 lx)	5.0' (1.5 m)	5.5' (1.7 m)
6' (1.8 m)	0.8 fc (8 lx)	10.1' (3.1 m)	11.0' (3.4 m)
9' (2.7 m)	0.4 fc (4 lx)	15.1' (4.6 m)	16.4' (5.0 m)
12' (3.7 m)	0.2 fc (2 lx)	20.1' (6.1 m)	22.0' (6.7 m)
15' (4.6 m)	0.1 fc (1 lx)	25.2' (7.7 m)	27.3' (8.3 m)
18' (5.5 m)	0.1 fc (1 lx)	30.2' (9.2 m)	33.0' (10.1 m)

WS Spec Chart

Output	LED35W
Halogen Lumen Output Equivalent	35W

Total Lumens	85
Input Voltage	10 to 15V
Power Consumption (VA)	1.7
Lumens per Watt (Efficacy)	37
CRI (Ra)	86
Center Beam Candle Power (CBCP)	31
CCT	2,700K
Beam Angle	85°
Dimming	Phase*
Luxor Compatibility	
ZD Option	Use Luxor Cube (LCM-LV)
Minimum Rated Life (L70)	33,000 hrs

*For optimal performance, use a trailing-edge, phase-cut dimmer.

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	E3

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

WS			
MODEL	LAMP	LED COLOR	FINISH

LAMP

- **E3** — 1.7 VA G4 LED Lamp (Eco Lamp Series)
- **LED35** — 1.7 VA G4 Lamp (35W equivalent Lamp)

LED COLOR

- **W** — Warm (2700K)
- **S** — Soft (3000K)

FINISH

- **BZ** — Bronze Metallic
- **FB** — Black
- **SB** — Sedona Brown
- **DG** — Desert Granite
- **WI** — Weathered Iron
- **FW** — Flat White
- **SV** — Silver

Accessories

MOUNTING



PM-XX* PM
Post Mount



GM-XX* GM
Ground Mount with ½" Thread



VB-050-XX* VB-050
VersaBox® Mount with ½" Thread



MJB-050-XX* MJB-050
Mini J-Box for ½" Thread



TB-XX* TB
TreeBox® Mount with ½" Thread



753900
Super Slot Spike



250015840000
Long Slot Spike



250020020000
Three-Prong Spike



VHR-UL VHRUL
Variable Height Riser for Up Lights



SJ-XX* SJ
Super J-Box Spike



WM-XX* WM
Wall Mount Knuckle



MM-050-XX* MM-050
Mini Mount



WP-1G-050-XX* WP-1G-050
Single-Gang Wall Plate with ½" Thread



WP-RD-050-XX* WP-RD-050
Round Wall Plate with ½" Thread



GM-SS
Gutter Mount

YY*-R-XX*
Aluminum Riser, ¾" Diameter



COUP-XX* COUP
Straight Coupling



ELBW-050-XX* ELBW-050
90° Coupling



TMNT-050-XX* TMNT-050
T-Mount Coupling with ½" Thread



YY*-R-SL-XX*
Sign Light Riser, Aluminum



TR-YY*-8P-XX* TR
Tree Ring



PARS
ProAim® Ratcheting Spike



eKitSpike
CE Certified Spike



250030410000SP
Lock Ring

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module