Designer™ QZ Accent Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Small in size, the lamped MP easily integrates into any intimate garden space while the integrated QZ offers Luxor compatibility for zoning and dimming.

Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Built-in angled glare-control for maximum comfort in the space

QZ Dimensions

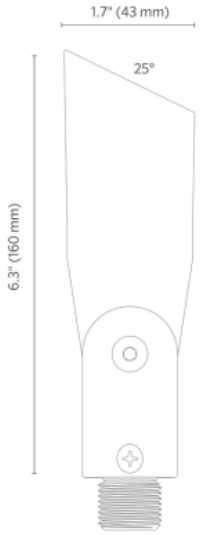

QZ Spec Chart

Number of LEDs	1
Total Lumens (lm)	110
Input Voltage	10 to 15V
Power Consumption (VA)	2.2
Watts Used	2.0
Efficacy (lm/W)	34.9
Color Rendering Index (CRI)	79.8
Correlated Color Temperature (CCT)	2700K
Minimum Rated Life (L70)	50,000

ADDITIONAL CERTIFICATIONS

UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

QZ				
MODEL	LUXOR CONTROL	POWER	LED COLOR	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor

POWER

- ☐ **1LED** 2.4 VA

LED COLOR

- ☐ **[Default]** Warm (2700K)

FINISH

- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White
- ☐ **SV** Silver

Accessories

MOUNTING

☐ 
PM-XX* PM
Post Mount

☐ 
GM-XX* GM
Ground Mount with ½" Thread

☐ 
VB-050-XX* VB-050
VersaBox® Mount with ½" Thread

☐ 
MJB-050-XX* MJB-050
Mini J-Box for ½" Thread

☐ 
TB-XX* TB
TreeBox® Mount with ½" Thread

☐ 
753900
Super Slot Spike

☐ 
250015840000
Long Slot Spike

☐ 
250020020000
Three-Prong Spike

☐ 
VHR-UL VHRUL
Variable Height Riser for Up Lights

☐ 
SJ-XX* SJ
Super J-Box Spike

☐ 
WM-XX* WM
Wall Mount Knuckle

☐ 
MM-050-XX* MM-050
Mini Mount

☐ 
WP-1G-050-XX* WP-1G-050
Single-Gang Wall Plate with ½" Thread

☐ 
WP-RD-050-XX* WP-RD-050
Round Wall Plate with ½" Thread

☐ 
GM-SS
Gutter Mount

☐
YY*-R-XX*
Aluminum Riser, ¾" Diameter

☐ 
COUP-XX* COUP
Straight Coupling

☐ 
ELBW-050-XX* ELBW-050
90° Coupling

☐ 
TMNT-050-XX* TMNT-050
T-Mount Coupling with ½" Thread

☐ 
YY*-R-SL-XX*
Sign Light Riser, Aluminum



TR-YY*-8P-XX* TR
Tree Ring



PARS
ProAim® Ratcheting Spike



250030410000SP
Lock Ring

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module