Designer™ PL Aluminum Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Aluminum Riser


Quick Facts

- Built with durable, lightweight aluminum housing that withstands any weather condition
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color and dynamic RGBW color-changing options
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

PL Dimensions

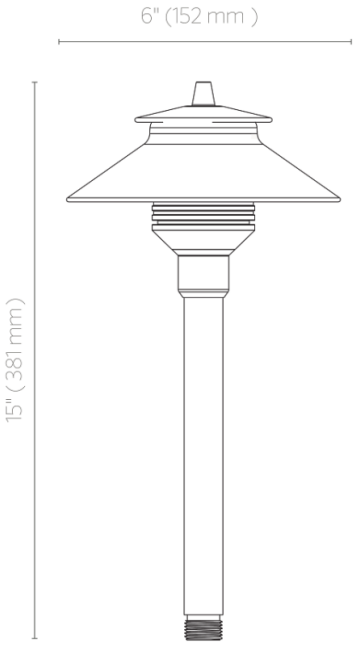

PL Photometrics (Incandescent)

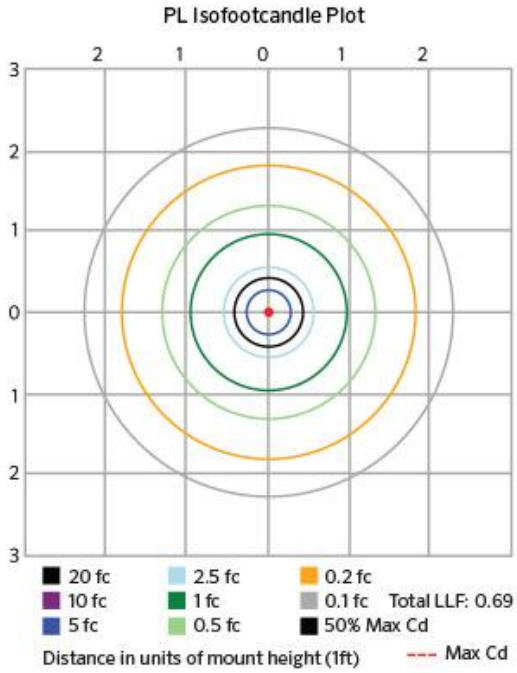

PL Spec Chart

Number of LEDs	1	3	ZDC
Halogen Lumen Output Equivalent	10 Watt	20 Watt	10 Watt
Useful LED Life (L70)	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
Input Voltage	10 to 15V	10 to 15V	11 to 15V
VA Total (Use this number to size the transformer)	2.4	4.5	7.2
Watts Used	2	4.2	6.0
Lumens per Watt (Efficacy)	15	25	21
Max Lumens	27	79	66
CRI (Ra)	85	82	85
CCT			
Amber Filter	2700K	2700K	N/A
Green Filter	4500K	4500K	N/A
Blue Filter	5200K	5200K	N/A

Required accessory for CE compliance: GM-XX

Model Configurator

Options are listed per model. Not every combination of options is an orderable catalog number — confirm the configured part number against the model's SKU list before specifying.

A

A					
MODEL	LUXOR CONTROL	POWER	LED COLOR	RISER	FINISH

LUXOR CONTROL

- ☐ **[Default]** — On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** — Zone/Dim with Luxor
- ☐ **ZDC** — Zone/Dim/Color with Luxor (Medium Round 3 LED)

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Warm (2700K)
- ☐ **S** — Soft (3000K)

RISER

- ☐ **12RA** — 12'' Riser Assembly
- ☐ **18RA** — 18'' Riser Assembly
- ☐ **24RA** — 24'' Riser Assembly

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White

- [ ] **SV**
  Silver

PLLEDTA

PLLEDTA				
MODEL	LUXOR CONTROL	POWER	LED COLOR	FINISH

LUXOR CONTROL

- [ ] **[Default]**
  On/Off | Phase Dimmable | Zone with Luxor

POWER

- [ ] **[Default]**
  Default ZDC Option 6.0W/7.2VA

LED COLOR

- [ ] **[Default]**
  Warm (2700K)

FINISH

- [ ] **BZ**
  Bronze Metallic
- [ ] **FB**
  Black
- [ ] **SB**
  Sedona Brown
- [ ] **DG**
  Desert Granite
- [ ] **WI**
  Weathered Iron
- [ ] **FW**
  Flat White
- [ ] **SV**
  Silver

Accessories

MOUNTING



GM-XX* GM
Ground Mount with ½" Thread



VB-050-XX* VB-050
VersaBox® Mount with ½" Thread



MJB-050-XX* MJB-050
Mini J-Box for ½" Thread



753900
Super Slot Spike



250015840000
Long Slot Spike



250020020000
Three-Prong Spike



VHR-UL VHRUL
Variable Height Riser for Up Lights



SJ-XX* SJ
Super J-Box Spike

YY*-R-XX*
Aluminum Riser, ¾" Diameter



COUP-XX* COUP
Straight Coupling



PARS
ProAim® Ratcheting Spike

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage