Terra™ KG LED Well Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES


These subterranean well lights feature a keyhole grate pattern that offers output balance and glare control. They also come in a variety of light source, finish, and construction material options for high performance and maximum durability.


Quick Facts

- Utilizes a premium lamp socket with a ceramic base and retaining clips for a secure and long-lasting hold
- Includes field-servicable beam angle lenses from Very Narrow to Wide Flood
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color and dynamic RGBW color-changing options

KG Photometrics

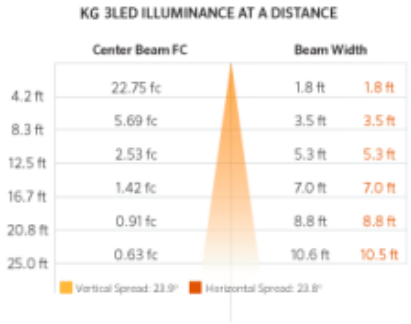

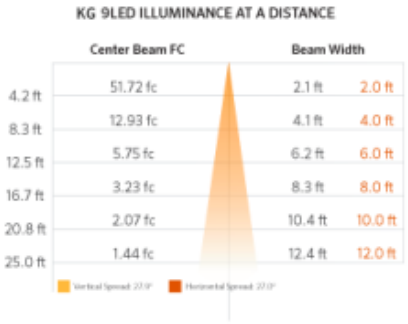

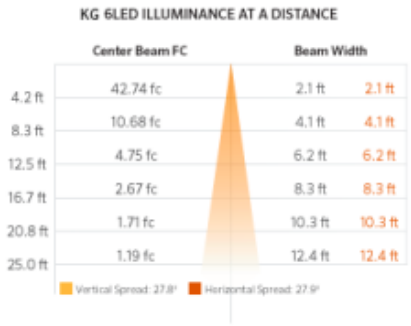

KG Spec Chart

Output	3LED	6LED	9LED	ZDC
Total Lumens†	186	452	543	123
Input Voltage	10 to 15V	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	4.0 W	7.7 W	11.1 W	9.1
Power Consumption (VA)	4.4 W	9.3 W	12.2 W	11.0
Efficacy (lm/W)	48	59	49	23
Color Rendering Index (CRI)	83	83	83	80+
Center Beam Candlepower*				
Flood (35)	554	1028	1391	166
Dimming				
Primary Dimming (Transformer)	Consult transformer specifications			
Secondary Dimming (Fixture)	Phase-cut**	Phase-cut**	Phase-cut**	Luxor
RGBW Available	No	No	No	Yes
Luxor Compatibility				

Default	Zoning	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	Zoning/Dimming/Color
Minimum Rated Life (L70) Hrs	72,000 Hrs	72,000 Hrs	72,000 Hrs	55,000 Hrs

* Information not available for Wide Flood
** For optimal performance, use a trailing-edge, phase-cut dimmer
† Measured using the 2,700K option

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

KG					
MODEL	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LUXOR CONTROL

☐ **ZD**
Zone/Dim with Luxor

☐ **ZDC**
Zone/Dim/Color with Luxor (Large Round 3LED)

POWER

☐ **3LED**
4.5 VA

☐ **6LED**
9.3 VA

☐ **9LED**
12.2 VA

☐ **[Default]**
Default ZDC Option 6.0W/7.2VA

LED COLOR

- [ ] **[Default]**
  Default ZDC option 11.0 VA

COMPLIANCE

- [ ] **[Default]**
  North America (UL Listed)
- [ ] **E**
  International (CE Certified)

FINISH

- [ ] **AB**
  Antique Bronze
- [ ] **BS**
  Natural Brass
- [ ] **BZ**
  Bronze Metallic
- [ ] **FB**
  Black
- [ ] **SB**
  Sedona Brown
- [ ] **DG**
  Desert Granite
- [ ] **WI**
  Weathered Iron
- [ ] **FW**
  Flat White
- [ ] **SV**
  Silver
- [ ] **CB**
  Camo Bronze

Accessories

POWER

- [ ] 
  MT-6W
  Plug-In Transformer, 6 W
- [ ] 
  ST-UV
  Step-Down Transformer, UV (120/277 V to 12 V)
- [ ] 
  SURGE-MOD
  Surge Protection Module

SPLICING

- [ ] 
  WCHSBS2
  Brass Lug Wire Connectors, 2-pack
- [ ] 
  WCHSBS50
  Brass Lug Wire Connectors, 50-item Bulk Pack



WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small



WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium



WCHSTOOL
Ratcheting Crimper Tool