Garden™ TD LED Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Precision milled from copper and brass for elegance and function, these classic path lights complement a wide range of landscape and architectural styles to outlast any trend.

Quick Facts


- Premium, corrosion-resistant copper and brass construction protects internal and external elements of the fixture
- Decorative style for directional path lighting
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options

TD Dimensions

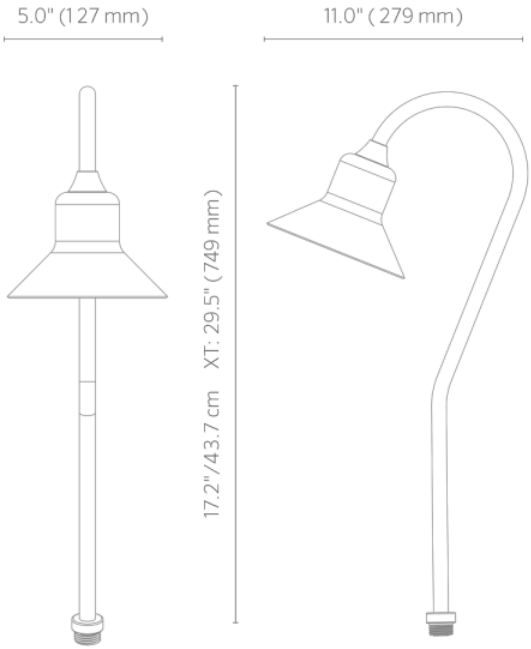


TD Photometrics


TD 1LED ISOFOOTCANDLE PLOT




TD 3LED ISOFOOTCANDLE PLOT




TD 6LED ISOFOOTCANDLE PLOT




TD 9LED ISOFOOTCANDLE PLOT




TD Dimensions (Lamped)

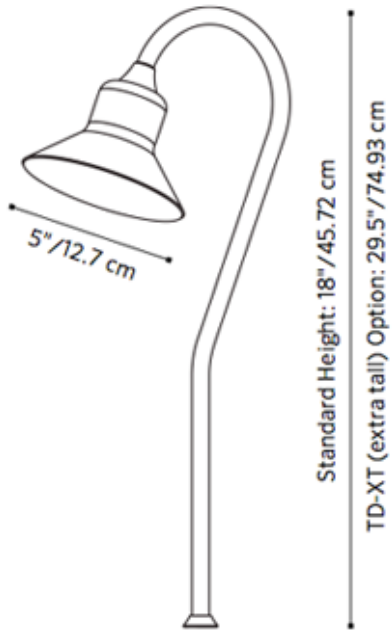

TD Photometrics (Lamped)

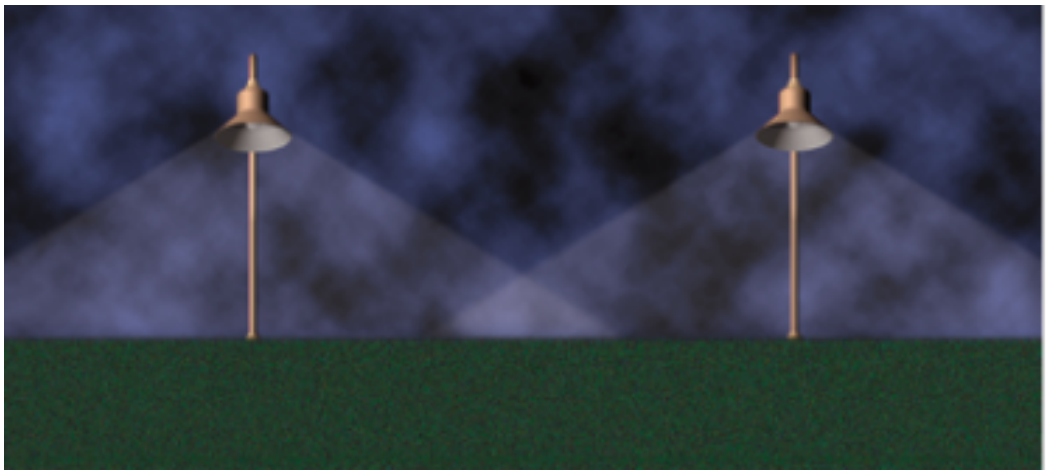

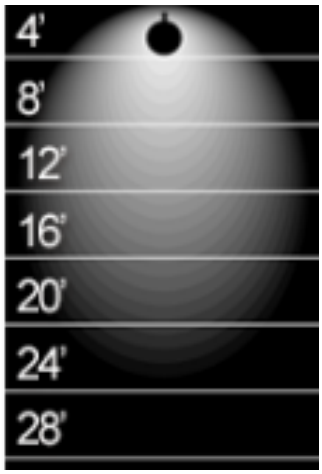

TD Spec Chart

Number of LEDs	1	3 (ZDC)	6	9
Halogen Lumen Output Equivalent	10 Watt	20 Watt	35 Watt	50 Watt
Useful LED Life (L70)	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
Input Voltage	10 to 15V	10 to 15V	10 to 15V	10 to 15V
VA Total (Use this number to size the transformer)	2.4	4.5 (11)	13.5	13.5
Watts Used	2.0	4.2 (9.1)	10.1	11.2
Lumens per Watt (Efficacy)	38	55	51	54
Max Lumens	75	218	404	530
CRI (Ra)	83	80	81	80
CCT				
Amber Filter	2700K	2700K (ZDC: N/A)	2700K	2700K
Frosted Filter	3900K	3900K (ZDC: N/A)	3900K	3900K

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Machined C360 brass cap and reducer with stainless hardware. Spun C110 copper top/shade and extruded C110 copper riser.
LED	12
Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens), 4,500K, and 5,200K. Conical reflector maximizes distribution according to riser height. Color temperature lenses field serviceable.
Threads	Machined brass fitting with ½"-14 (13 mm) NPSM threads.
Finish	Options of natural copper/ brass finish, or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer. Brass accent pieces remain natural (not powder coated) for Bronze, Silver, Black, and Flat White finishes.
Hardware	Stainless steel sealing screws with setscrews. Includes 12" (305 mm) ABS slotted installation spike.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 3.6' (1.1 m) length with 12" (305 mm) riser.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	2.6 lbs (1.2 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the downward lighting direction only.

LISTINGS

ADDITIONAL CERTIFICATIONS

UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

TD							
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LAMP	LED COLOR	RISER	FINISH

LIGHTING ENGINE

- ☐ **Powerboard Integrated LED**
- ☐ **SCB**

LUXOR CONTROL

- ☐ **ZD**
  Zone/Dim with Luxor
- ☐ **ZDC**
  Zone/Dim/Color with Luxor (Large Round 3LED)

POWER

- ☐ **3LED**
  4.5 VA
- ☐ **6LED**
  9.3 VA
- ☐ **9LED**
  12.2 VA
- ☐ **[Default]**
  Default ZDC Option 6.0W/7.2VA

LAMP

- ☐ **12**
  12W Incandescent
- ☐ **18**
  18W Incandescent
- ☐ **25**
  25W Incandescent

LED COLOR

- [ ] **[Default]**
  Default ZDC option 11.0 VA

RISER

- [ ] **[Default]**
  No riser
- [ ] **XT**
  Extra Tall

FINISH

- [ ] **AB**
  Antique Bronze
- [ ] **BZ**
  Bronze Metallic
- [ ] **FB**
  Black
- [ ] **SB**
  Sedona Brown
- [ ] **DG**
  Desert Granite
- [ ] **WI**
  Weathered Iron
- [ ] **FW**
  Flat White
- [ ] **SV**
  Silver
- [ ] **CU**
  Natural Copper

Accessories

MOUNTING

- [ ] 
  GM-XX* GM
  Ground Mount with ½" Thread
- [ ] 
  VB-050-XX* VB-050
  VersaBox® Mount with ½" Thread
- [ ] 
  MJB-050-XX* MJB-050
  Mini J-Box for ½" Thread
- [ ] 
  753900
  Super Slot Spike
- [ ] 
  250015840000
  Long Slot Spike
- [ ] 
  250020020000
  Three-Prong Spike
- [ ] 
  VHR-UL VHRUL
  Variable Height Riser for Up Lights
- [ ] 
  SJ-XX* SJ
  Super J-Box Spike



YY*-R-GT-XX*

1.0" (25 mm) Copper Riser for GT Path Light



PARS

ProAim® Ratcheting Spike

POWER



MT-6W

Plug-In Transformer, 6 W



ST-UV

Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD

Surge Protection Module



LCM-LV

Luxor Cube - Low-Voltage