Runa™ RW Wall Wash



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Perfect for accenting architectural elements or plant details, the RW offers soft illumination to wash walls and create a gentle glow. This contemporary fixture highlights landscape features and illuminates walkways for safe passage at night. The flexible RW produces soft illumination for a variety of down lighting applications.


Quick Facts


- Built with durable, lightweight aluminum housing that withstands any weather condition
- Delivers soft wash and seamless transitions for enhanced uniformity and a more pleasant visual experience
- Frosted glass lens provides soft, even light distribution
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Flush shield for maximum efficacy and wide beam angles
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color and dynamic RGBW color-changing options
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences


RW Dimensions

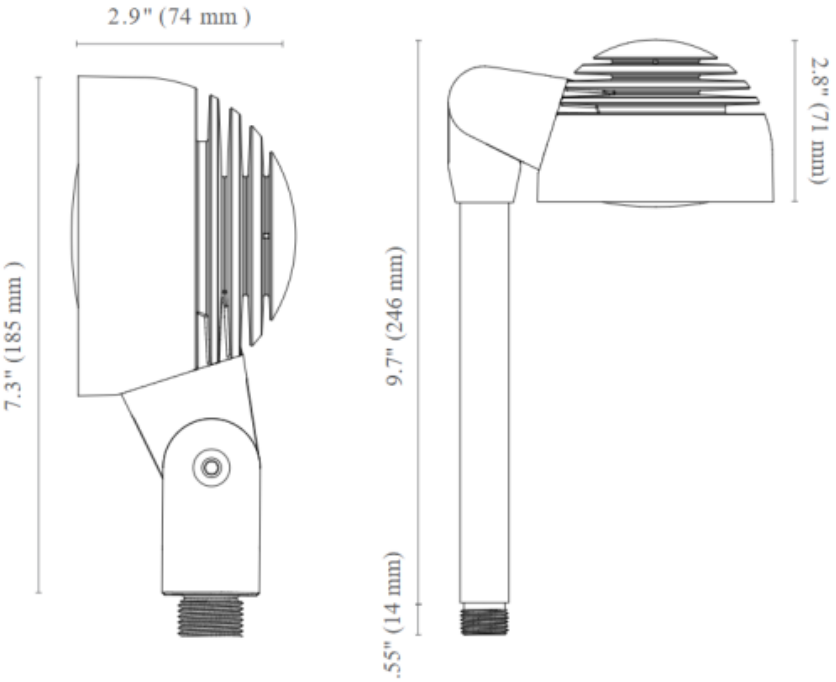

RW Photometrics







RW Specifications

Output	3LED	6LED	9LED	ZDC
Total Lumens†	250	520	720	170-225

Output	3LED	6LED	9LED	ZDC
Input Voltage	10 to 15V	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	4.2	8.2	10.0	9.1
VA	4.5	9.3	12.2	11.0
Efficacy (Lumens/Watt)	64	57	54	36
Color Rendering Index (CRI)	80+	80+	80+	80+
Center Beam Candlepower*				
Spot (17-20)	1,172	1,434	1,769	159
Dimming	PWM, Phase**	PWM, Phase**	PWM, Phase**	--
RGBW Available	No	No	No	Yes
Luxor Compatibility				
Default	Zoning	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	Zoning/Diming/Color
Minimum Rated Life (L90)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs

* Information not available for Flood or Wide Flood.

** For optimal performance, use a trailing-edge, phase-cut dimmer.

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

RW					
MODEL	LUXOR CONTROL	POWER	LED COLOR	RISER	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor
- ☐ **ZDC** Zone/Dim/Color with Luxor (Large Round 3LED)

POWER

- ☐ **3LED** 4.5 VA
- ☐ **6LED** 9.3 VA
- ☐ **9LED** 12.2 VA
- ☐ **[Default]** Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** Warm (2700K)

RISER

- ☐ **12R** 12'' Riser
- ☐ **18R** 18'' Riser
- ☐ **24R** 24'' Riser
- ☐ **[Default]** No riser

FINISH

- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White

- [ ] **SV**
  Silver

Accessories

MOUNTING

- [ ] 
  PM-XX* PM
  Post Mount

- [ ] 
  GM-XX* GM
  Ground Mount with ½" Thread

- [ ] 
  VB-050-XX* VB-050
  VersaBox® Mount with ½" Thread

- [ ] 
  MJB-050-XX* MJB-050
  Mini J-Box for ½" Thread

- [ ] 
  TB-XX* TB
  TreeBox® Mount with ½" Thread

- [ ] 
  753900
  Super Slot Spike

- [ ] 
  250015840000
  Long Slot Spike

- [ ] 
  250020020000
  Three-Prong Spike

- [ ] 
  VHR-UL VHRUL
  Variable Height Riser for Up Lights

- [ ] 
  SJ-XX* SJ
  Super J-Box Spike

- [ ] 
  WM-XX* WM
  Wall Mount Knuckle

- [ ] 
  MM-050-XX* MM-050
  Mini Mount

- [ ] 
  GM-SS
  Gutter Mount

- [ ]
  YY*-R-XX*
  Aluminum Riser, ¾" Diameter

- [ ] 
  COUP-XX* COUP
  Straight Coupling

- [ ] 
  ELBW-050-XX* ELBW-050
  90° Coupling

- [ ] 
  TMNT-050-XX* TMNT-050
  T-Mount Coupling with ½" Thread

- [ ] 
  YY*-R-SL-XX*
  Sign Light Riser, Aluminum



PARS
ProAim® Ratcheting Spike



250030410000SP
Lock Ring

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module