Runa™ VE LED Down Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

When hung from above, the VE produces a moonlighting effect that softly illuminates seating areas, focal points, or landscaping features.


Quick Facts


- Includes stainless steel cable and lock for a lasting installation
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color and dynamic RGBW color-changing options


VE Dimensions

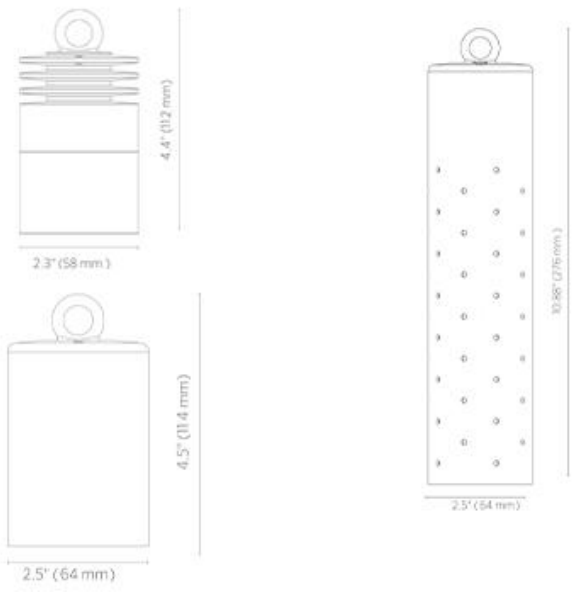

VE Photometrics

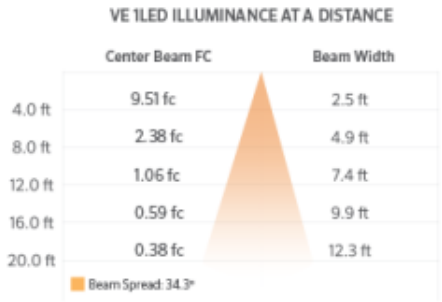

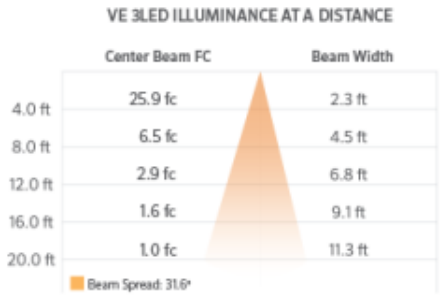

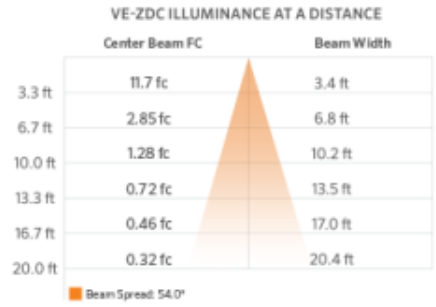

VE Spec Chart

Output	1LED	3LED	ZDC

Total Lumens†	90	220	70-130
Input Voltage	10 to 15V	10 to 15V	10 to 15V
Input Power (W)	1.9	4.0	6.0
VA	2.2	4.5	7.2
Efficacy (Lumens/Watt)	50	57	39
Color Rendering Index (CRI)	83	84	80+
Maximum Candela	88	225	198
Dimming	PWM, Phase**	PWM, Phase**	PWM, Phase**
RGBW Available	No	No	Yes
Luxor Compatibility			
Default	Zoning	Zoning	--
ZD Option	Zoning/dimming	Zoning/Dimming	--
ZDC Option	--	--	Zoning/Dimming/Color
Minimum Rated Life L70 (Hrs)	72,000	72,000	55,000

** For optimal performance, use a trailing-edge, phase-cut dimmer.
† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast A380 aluminum housing and shroud with stainless steel setscrew, hanging cable, and cable lock.

Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens), 4,500K, and 5,200K. Interchangeable optics for 10°, 20°, 30°–32°, or 55–58° distributions ordered pre- assembled to fixture. Color temperature and beam angle lenses field serviceable. For additional color filters, spread lenses, hex baffles, etc., use MR-16 sized accessories (MR-16: 1.95" (50 mm) dia. x 1.1 mm thickness). Beam angle is calculated using LM-79 method for SSL luminaires.
Finish	Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Hardware	Includes stainless steel cable with cable lock. Tamper- resistant setscrew included.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 26' (8 m) length.
Sockets	Lamp holder contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Glare Control	Die-cast A380 aluminum housing with capacity for 1LED, 3LED, or ZDC integrated LEDs.
Weight	1.3 lbs. (0.6 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the downward direction only.

LISTINGS

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Ordering instructions:

To select the correct shroud option, see the instructions below –

Perforated sleeve: Select “PS” in the model builder
Medium sleeve with ribs: Select BZ, DG, WI, FB, SB, FW, or SV finishes
Short sleeve: Select CU, AB, AT, or NP finishes

Model Configurator

VE						
MODEL	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	ACCESSORIES	FINISH

LUXOR CONTROL

- ☐ **[Default]** — On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** — Zone/Dim with Luxor
- ☐ **ZDC** — Zone/Dim/Color with Luxor (Medium Round 3 LED)

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Warm (2700K)
- ☐ **S** — Soft (3000K)
- ☐ **C** — Cool (4000K)

COMPLIANCE

- ☐  **[Default]** — North America (UL Listed)
- ☐  **E** — International (CE Certified)

ACCESSORIES

- ☐ **[Default]** — Standard
- ☐ **PS** — Perforated sleeve

FINISH

- ☐ **AB** — Antique Bronze
- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron

- [ ] **FW** Flat White
- [ ] **SV** Silver
- [ ] **CU** Natural Copper

Accessories

MOUNTING

- [ ]  **250021830000** Hanging Cable
- [ ]  **250021820000** Hanging Cable Lock

POWER

- [ ]  **MT-6W** Plug-In Transformer, 6 W
- [ ]  **ST-UV** Step-Down Transformer, UV (120/277 V to 12 V)
- [ ]  **SURGE-MOD** Surge Protection Module