Modern™ SL Recessed Wall Light



PROJECT NAME

TYPE


CATALOG #

QUANTITY


NOTES


These versatile wall lights are available with multiple faceplate options to maximize design flexibility in a range of applications.


SL-3 Dimensions

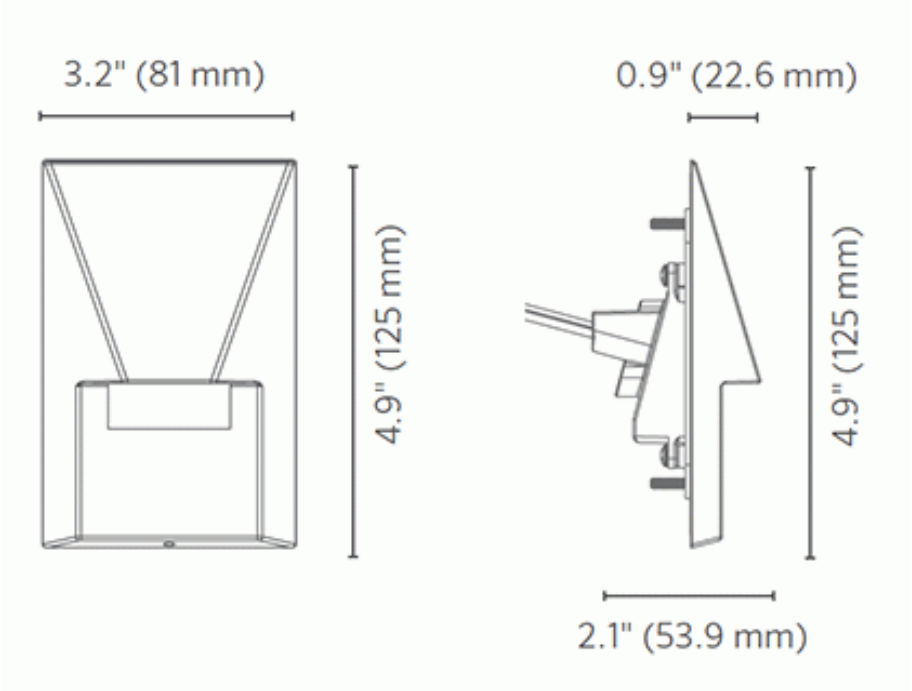


SL-3 Photometrics











SL-5 Photometrics














SL-3 Spec Chart

Output	1 LED	3 LED	ZDC

Total Lumens†	80	200	60-145
Input Voltage	10 to 15V	10 to 15V	11 to 15V
Input Power	2.0 W	4.2 W	6.0 W
Power Consumption (VA)	2.2	4.5	7.2
Efficacy (lm/W)	24	19	10
Color Rendering Index (CRI)	80+	80+	80+
Max Candela	53	73	56
Dimming			
Primary Dimming (Transformer)	Consult transformer specifications		
Secondary Dimming (Fixture)	Phase-cut**	Phase-cut**	Luxor
RGBW Available	No	No	Yes
Luxor Compatibility			
Default	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	Zoning/Dimming/Color
Minimum Rated Life L90 B10	55,000 Hrs	55,000 Hrs	55,000 Hrs

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).
** For optimal performance, use a trailing-edge, phase-cut dimmer.

SL-5 Spec Chart

Output	1 LED	3 LED	ZDC
Total Lumens†	50	130	170-395
Input Voltage	10 to 15 V	10 to 15 V	11 to 15 V
Input Power	2.0 W	4.2 W	6.0 W
Power Consumption (VA)	2.4	4.5	7.2
Efficacy (lm/W)	24	32	24
Color Rendering Index (CRI)	80+	80+	80+
Max Candela	38	80	108
Dimming			

Output	1 LED	3 LED	ZDC
Primary Dimming (Transformer)	Consult transformer specifications		
Secondary Dimming (Fixture)	Phase-cut**	Phase-cut**	Luxor
RGBW Available	No	No	Yes
Luxor Compatibility			
Default	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	Zoning/Dimming/Color
Minimum Rated Life L90 B10	55,000 Hrs	55,000 Hrs	55,000 Hrs

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).
** For optimal performance, use a trailing-edge, (reverse phase-cut) dimmer.

Model Configurator

Options are listed per model. Not every combination of options is an orderable catalog number — confirm the configured part number against the model's SKU list before specifying.

SL3

SL3						
MODEL	FIXTURE	LUXOR CONTROL	POWER	LED COLOR	STYLE	FINISH

FIXTURE

- ☐ **SL3**
- ☐ **SL5**

LUXOR CONTROL

- ☐ **ZD**
  Zone/Dim with Luxor
- ☐ **ZDC**
  Zone/Dim/Color with Luxor

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐  **[Default]** — Default ZDC option 11.0 VA
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

STYLE

- ☐  **CV** — Curved
- ☐ **RD** — Round

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

SL5

SL5						
MODEL	FIXTURE	LUXOR CONTROL	POWER	LED COLOR	STYLE	FINISH

FIXTURE

- ☐ **SL3**
- ☐ **SL5**

LUXOR CONTROL

- ☐ **ZD** — Zone/Dim with Luxor
- ☐ **ZDC** — Zone/Dim/Color with Luxor

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Default ZDC option 11.0 VA
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

STYLE

- ☐ **CV** — Curved
- ☐ **FT** — Flat

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

Accessories

POWER

- ☐  **ST-UV** — Step-Down Transformer, UV (120/277 V to 12 V)
- ☐  **SURGE-MOD** — Surge Protection Module
- ☐  **JB-1G-NW-NM**
- ☐  **ST-120-DIM** — Step-Down Transformer, Dimmable (120 V to 12 V)