Runa™ MO LED Wall Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Available in four unique shapes, the PO offers maximum design flexibility. The larger MO offers the same styles with a frosted glow, delivers more light output, and is the only 20 W equivalent wall light compatible with the Luxor® System.


Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Premium, corrosion-resistant brass construction protects internal and external elements of the fixture
- Minimal visible hardware for a clean and elegant design, day or night
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options

MO Dimensions

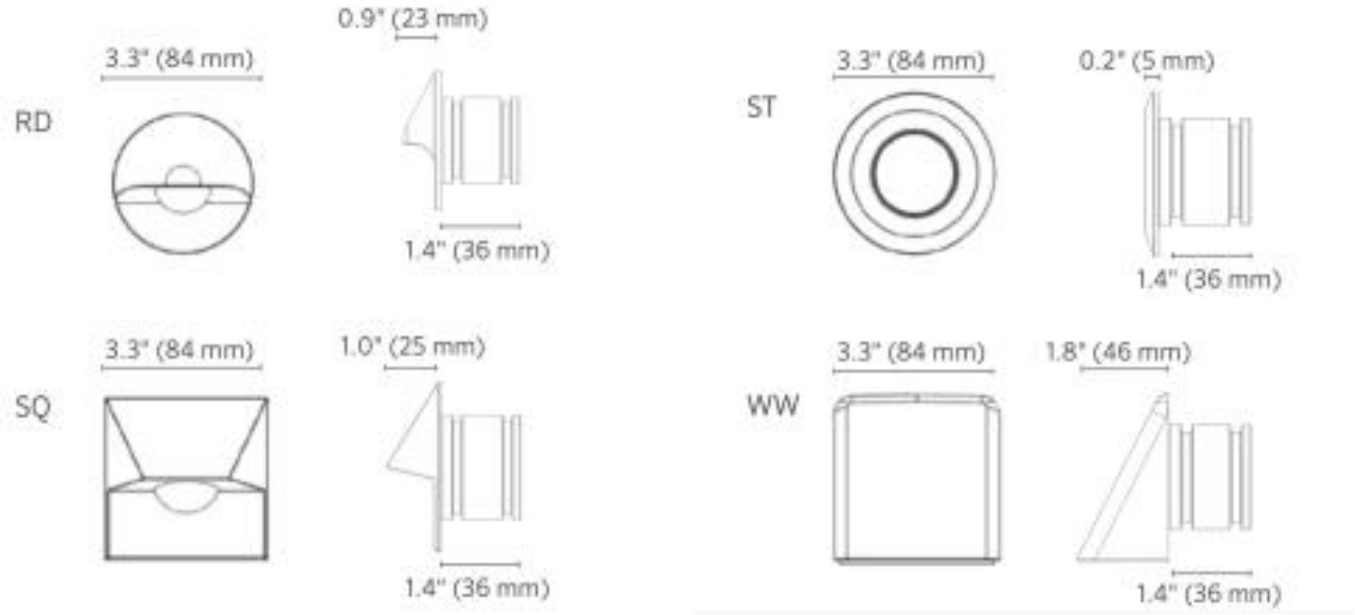

MO Photometrics

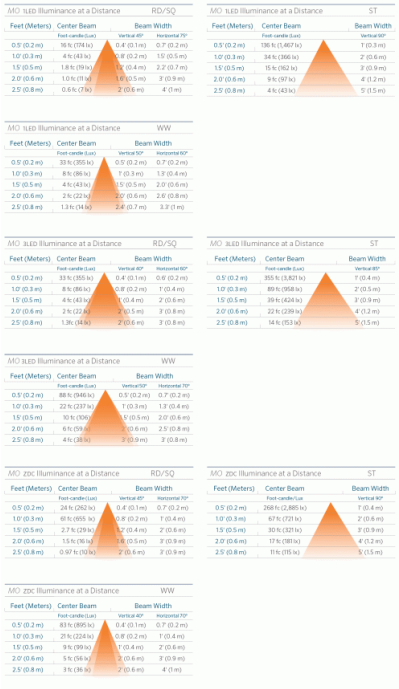

MO Spec Chart

Output	1LED	3LED	3LEDT	ZDC
Total Lumens†‡	35-125	220-350	150-160	140-330

Output	1LED	3LED	3LEDT	ZDC
Input Voltage	10 to 15V	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	2.0	4.2	4.2	6.0
VA	2.2	4.5	4.5	7.2
Efficacy (Lumens/Watt)	18	21	29	19
Color Rendering Index (CRI)	82	82	--	82
Max Candela	31	79	195	51
Dimming	PWM, Phase**	PWM, Phase**	PWM, Phase**	--
RGBW Available	No	No	No	Yes
Luxor Compatibility				
Default	Zoning	Zoning	--	--
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	Zoning/Dimming/Color
Minimum Rated Life (L70)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
BUG Rating (RD & SQ)	B0-U1-G0	B0-U1-G1	B0-U1-G1	B0-U1-G0

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).
‡ Measured using the Round (RD) faceplate. Multipliers for other faceplates include: 1.0 (Square), 2.0 (spot), and 0.4 (Wall Wash).
** For optimal performance, use a trailing-edge, phase-cut dimmer.

Required accessory for CE compliance: eKitWall

Model Configurator

MO						
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LED COLOR	STYLE	FINISH

LIGHTING ENGINE

☐ **Powerboard Integrated LED**

LUXOR CONTROL

- ☐ **ZDC** — Zone/Dim/Color with Luxor (Medium Round 3 LED)
- ☐ **ZD** — Zone/Dim with Luxor

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Warm (2700K)
- ☐ **S** — Soft (3000K)
- ☐ **C** — Cool (4000K)
- ☐ **T** — Wildlife-Friendly (585 to 595 nm)

STYLE

- ☐ **RD** — Round
- ☐ **SQ** — Square
- ☐ **ST** — Spot
- ☐ **WW** — Wall Wash

FINISH

- ☐ **AB** — Antique Bronze
- ☐ **BS** — Natural Brass
- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

Accessories

MOUNTING



MO-BRKT
Mounting Bracket for MO Recessed Wall Light



eKitWall

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module