Vantage™ VW-31 Petite Wall Wash



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The lamped VW-31 offers a 45° beam angle while the integrated QB provides a 90° spread and Luxor Technology compatibility. Both wall washes feature a small footprint that allows them to blend easily into any landscape.

Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Built with durable, lightweight aluminum housing that withstands any weather condition
- Delivers soft wash and seamless transitions for enhanced uniformity and a more pleasant visual experience
- Frosted glass lens provides soft, even light distribution
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Built-in angled glare-control for maximum comfort in the space
- Available in a warm (2700K) and soft (3000K) color temperature.
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

VW-31 Line Drawing

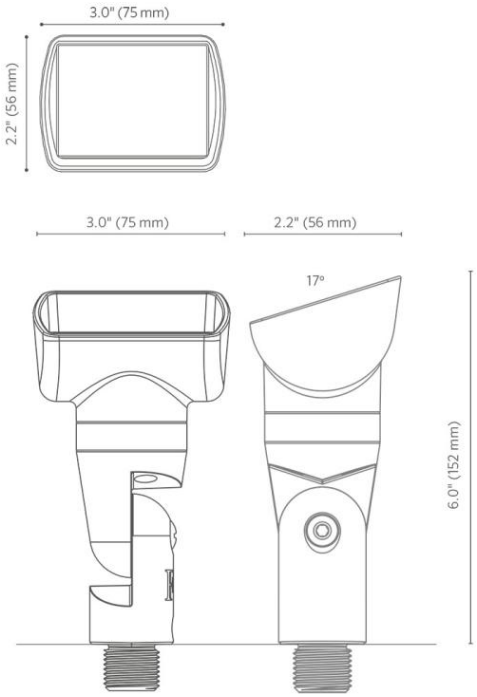

VW-31 Spec Chart

	ECO20WFL	ECO20SFL
Total Lumens (lm)	115	120
Power Consumption (VA)	3.4	3.4
Efficacy (lm/W)	53	55
Correlated Color Temperature (CCT)	2700K	3000K
CRI (Ra)	87	87
Beam Angle	32	32
Maximum Candela (cd)	285	285
Input Voltage (V)	12	12
Minimum Rated Life (L70)	30,000 Hrs	30,000 Hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast A380 aluminum housing and shield with stainless steel hardware. Die-cast zinc/aluminum alloy knuckle.
LED	ECO20
Optics	Ultra-wide batwing diffusion
Threads	½"-14 NPSM
Adjustability	Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.
Finish	Two-layer protection of marine-grade anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Hardware	Stainless steel angle lock screw. Includes 10" (254 mm) ABS slotted installation spike.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length
Sockets	MR-11 GU4 socket with retaining clips. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.
Glare Control	15° angled shield
Weight	1.3 lb (0.6 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the upward direction only
Manufacturing	9001:2015 ISO certified facility
Warranty	10-year limited warranty on fixture; 3-year limited warranty on LED lamp

LISTINGS

c UL us LISTED

RoHS COMPLIANT

Model Configurator

VW31				
MODEL	LAMP	LED COLOR	OPTIC	FINISH

LAMP

- ☐ **ECO20** — 4.2 VA LED MR-11 lamp (ECO lamp series)
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

OPTIC

- ☐ **[Default]** — NL Lamp
- ☐ **FL** — Flood (35°)

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

Accessories

MOUNTING

- ☐  **PM-XX*** PM
  Post Mount
- ☐  **VB-050-XX*** VB-050
  VersaBox® Mount with ½" Thread
- ☐  **TB-XX*** TB
  TreeBox® Mount with ½" Thread
- ☐  **250015840000**
  Long Slot Spike
- ☐  **VHR-UL** VHRUL
  Variable Height Riser for Up Lights
- ☐  **GM-SS**
  Gutter Mount
- ☐  **250030410000SP**
  Lock Ring
- ☐  **GM-XX*** GM
  Ground Mount with ½" Thread
- ☐  **MJB-050-XX*** MJB-050
  Mini J-Box for ½" Thread
- ☐  **753900**
  Super Slot Spike
- ☐  **250020020000**
  Three-Prong Spike
- ☐  **SJ-XX*** SJ
  Super J-Box Spike
- ☐  **PARS**
  ProAim® Ratcheting Spike

POWER

- ☐  **MT-6W**
  Plug-In Transformer, 6 W
- ☐  **SURGE-MOD**
  Surge Protection Module
- ☐  **ST-UV**
  Step-Down Transformer, UV (120/277 V to 12 V)
- ☐  **LCM-LV**
  Luxor Cube - Low-Voltage