Runa™ MS LED Wall Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The MS and MM are perfect for retrofit projects and can be used on masonry or wood surfaces. They're available in brass and a wide variety of powder-coated colors to match surroundings beautifully.

Quick Facts

- Minimal visible hardware for a clean and elegant design, day or night
- Frosted glass lens provides soft, even light distribution
- Surface-mounted with stainless steel hardware
- Available in a warm (2700K) color temperature
- Meets ADA requirements for sconce depth from wall
- DarkSky approved with a U0 BUG rating for a glare-free experience

MS Dimensions

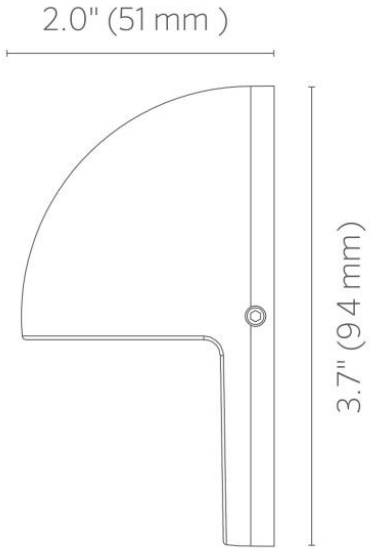

MS Spec Chart

Output	1LED
Total Lumens†	100
Input Voltage	10 to 15V
Input Power (W)	1.9
VA	2.2
Efficacy (Lumens/Watt)	56
Color Rendering Index (CRI)	84
Max Candela	53
Dimming	PWM, Phase**
Luxor Compatibility	
Default	Zoning
ZD Option	Zoning/Dimming
Minimum Rated Life L70 (Hrs)	72,000

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).
** For optimal performance, use a trailing-edge, phase-cut dimmer.

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast C360 brass or A380 aluminum faceplate and housing, with stainless steel hardware.
Optics	Polycarbonate color temperature filters included with fixture: 2,700K (pre-installed) or 3,900K (clear frosted filter). Filters field serviceable.

Finish	Selection of powder-coat, natural brass, or antique brass finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder-coat layer. Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions.
Hardware	Two tamper-resistant setscrews included.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	1.1 lbs. (0.5 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation on a vertical wall in the downward lighting direction only.
Warranty	10-year limited warranty.

LISTINGS

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Model Configurator

MS						
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LIGHTING ENGINE

☐ **Powerboard Integrated LED**

LUXOR CONTROL

- [ ] **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- [ ] **ZD** Zone/Dim with Luxor

POWER

- [ ] **1LED** 2.4 VA

LED COLOR

- [ ] **[Default]** Warm (2700K)
- [ ] **S** Soft (3000K)
- [ ] **C** Cool (4000K)

COMPLIANCE

- [ ] **[Default]** North America (UL Listed)
- [ ] **E** International (CE Certified)

FINISH

- [ ] **AB** Antique Bronze
- [ ] **BS** Natural Brass
- [ ] **BZ** Bronze Metallic
- [ ] **FB** Black
- [ ] **SB** Sedona Brown
- [ ] **DG** Desert Granite
- [ ] **WI** Weathered Iron
- [ ] **FW** Flat White
- [ ] **SV** Silver

Accessories

POWER

- [ ]  **MT-6W** Plug-In Transformer, 6 W
- [ ]  **ST-UV** Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD

Surge Protection Module