Runa™ LE Petite Hanging Pendant



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Available in an aluminum or brass/copper construction, the LE is designed for overhead illumination with 1 LED.

Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Includes stainless steel cable and lock for a lasting installation
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) color temperature

LE Dimensions

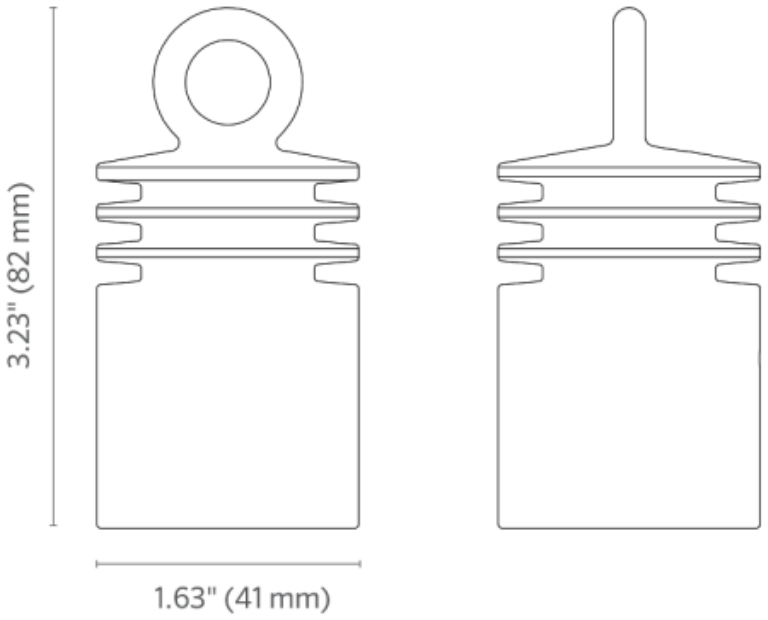

LE Spec Chart

Number of LEDs	1
Halogen Lumen Output Equivalent	10 Watt
Useful LED Life (L70)	50,000 hrs avg
Input Voltage	10 to 15V
VA Total (Use this number to size the transformer)	2.4
Watts Used	2.0
Lumens per Watt (Efficacy)	22.6
Max Lumens	55
CRI (Ra)	80.8

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast C360 brass housing, C110 copper shroud, with stainless steel set screw, hanging cable, and cable lock.
Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K, 4,500K, and 5,200K. Color temperature lenses field serviceable. Beam angle is calculated using LM-79 method for SSL luminaires.
Finish	Options of natural copper (brass finish, or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer.
Hardware	Includes stainless steel cable with cable lock. Tamper-resistant set screw included.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 26' (8 m) length.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	1.3 lbs. (0.6 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the downward direction only.

LISTINGS

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

LE						
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LIGHTING ENGINE

- ☐ **Powerboard Integrated LED**

LUXOR CONTROL

- ☐ **[Default]**
  On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD**
  Zone/Dim with Luxor

POWER

- ☐ **1LED**
  2.4 VA

LED COLOR

- ☐ **[Default]**
  Warm (2700K)
- ☐ **S**
  Soft (3000K)
- ☐ **C**
  Cool (4000K)

COMPLIANCE

- ☐ **[Default]**
  North America (UL Listed)
- ☐ **E**
  International (CE Certified)

FINISH

- ☐ **AB**
  Antique Bronze
- ☐ **BZ**
  Bronze Metallic
- ☐ **FB**
  Black
- ☐ **SB**
  Sedona Brown
- ☐ **DG**
  Desert Granite
- ☐ **WI**
  Weathered Iron
- ☐ **FW**
  Flat White
- ☐ **SV**
  Silver
- ☐ **CU**
  Natural Copper

Accessories

MOUNTING



250021830000
Hanging Cable



250021820000
Hanging Cable Lock

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module