Stella™ LO Accent Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Offering highly durable brass construction, this directional accent light delivers peak performance in even the harshest environments.

Quick Facts

- Premium, corrosion-resistant brass construction protects internal and external elements of the fixture
- Utilizes a premium lamp socket with a ceramic base and retaining clips for a secure and long-lasting hold
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Angled or flush glare-control options
- Built-in, spring-loaded lamp positioning for maximum control over glare and photometry
- Available in a warm (2700K) color temperature

LO Dimensions

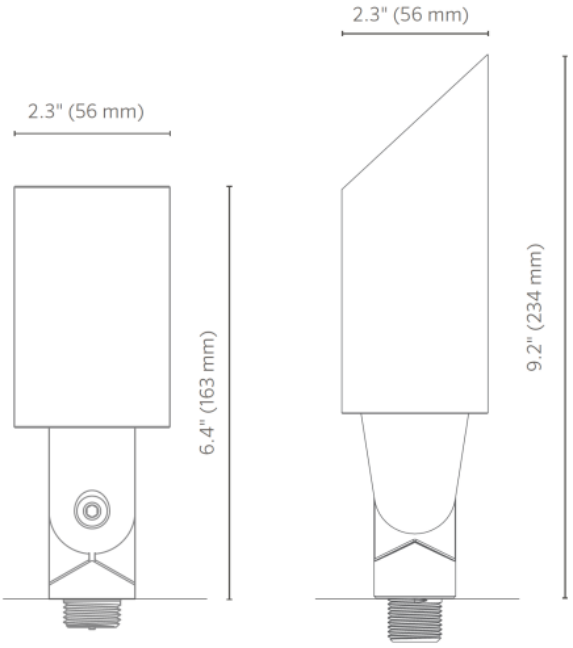

LO Spec Chart

Output	LED20WFL	LED35WFL	ZD35WFL
Total Lumens	210	315	340
Input Voltage	10 to 15V	10 to 15V	10 to 15V
Input Power (W)	4.2	4.6	5.0
VA	4.3	5.4	5.4
Efficacy (Lumens/Watt)	50	68	65
Color Rendering Index (CRI)	80+	80+	80+
Center Beam Candlepower (CBCP)			
Flood (35°)	570	830	844
Dimming	Phase*	Phase*	PWM, Phase*
Luxor Compatibility			
ZD Option	Use ZD MR-16 Lamp	Use ZD MR-16 Lamp	Zoning/Dimming
Minimum Rated Life (L70)	40,000 Hrs	40,000 Hrs	40,000 Hrs

**For optimal performance, use a trailing-edge, phase-cut dimmer.*

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

LISTINGS

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

LO					
MODEL	LAMP	LED COLOR	OPTIC	GLARE CONTROL	FINISH

LAMP

☐ **LED20** 4.3 VALED MR-16 Lamp (PRO Lamp Series)	☐ **LED35** 5.4 VA LED MR-16 Lamp (PRO Lamp series)	☐ **LED50** 6.5 VA LED MR-16 Lamp (LED Lamp series)

- [ ] **NL**
  Lamp Not Included
- [ ] **ZD35**
  5.4 VA LED MR-16 Lamp (ZD Lamp series

LED COLOR

- [ ] **[Default]**
  No Lamp
- [ ] **W**
  Warm (2700K)

OPTIC

- [ ] **[Default]**
  NL Lamp
- [ ] **FL**
  Flood (35°)

GLARE CONTROL

- [ ] **[Default]**
  Straight Cut Shroud
- [ ] **LS**
  45° Angled Long Shroud

FINISH

- [ ] **BS**
  Natural Brass

Accessories

MOUNTING

- [ ] 
  PM-XX* PM
  Post Mount
- [ ] 
  GM-XX* GM
  Ground Mount with ½" Thread
- [ ] 
  VB-050-XX* VB-050
  VersaBox® Mount with ½" Thread
- [ ] 
  MJB-050-XX* MJB-050
  Mini J-Box for ½" Thread
- [ ] 
  753900
  Super Slot Spike
- [ ] 
  250015840000
  Long Slot Spike



250020020000
Three-Prong Spike



VHR-UL VHRUL
Variable Height Riser for Up Lights



SJ-XX* SJ
Super J-Box Spike



WP-1G-050-XX* WP-1G-050
Single-Gang Wall Plate with ½" Thread



WP-RD-050-XX* WP-RD-050
Round Wall Plate with ½" Thread



GM-SS
Gutter Mount



YY*-R-GT-XX*
1.0" (25 mm) Copper Riser for GT Path Light



TR-YY*-8P-XX* TR
Tree Ring



PARS
ProAim® Ratcheting Spike



250030410000SP
Lock Ring

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage



LCM-RLY010V
Luxor Cube - Relay, 0-10V dimming