Stella™ RL Wall Wash



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Combining beauty and durability, the RL is specifically designed to gently illuminate small-scale plant material, rocks, and short garden walls.

Quick Facts

- Premium, corrosion-resistant copper and brass construction protects internal and external elements of the fixture
- Delivers soft wash and seamless transitions for enhanced uniformity and a more pleasant visual experience
- Frosted glass lens provides soft, even light distribution
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Flush shield for maximum efficacy and wide beam angles
- Available in a warm (2700K) color temperature

RL Dimensions

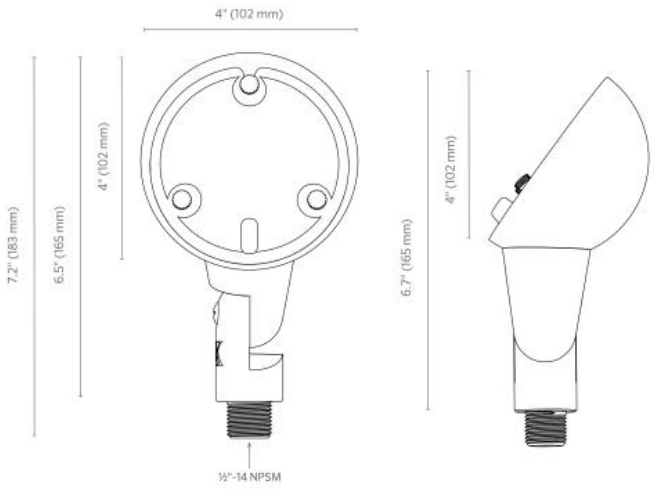

RL Spec Chart

Output	LED20W	LED35W
Power Consumption (VA)	1.3	1.7
Correlated Color Temperature (CCT)	2700K	2700K
Beam Angle	90°	90°
Input Voltage (V)	10 to 15V	10 to 15V
Control	Dimming	Dimming
Rated Life (L70)	33,000	33,000

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

RL				
MODEL	LAMP	LED COLOR	OPTIC	FINISH

LAMP

- ☐ **LED20** — 1.3 VA G4 Lamp (20W equivalent Lamp)
- ☐ **LED35** — 5.4 VA LED MR-16 Lamp (PRO Lamp series)
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)

OPTIC

- ☐ **[Default]** — NL Lamp

FINISH

- ☐ **CU** — Natural Copper

Accessories

MOUNTING



PM-XX* PM
Post Mount



VB-050-XX* VB-050
VersaBox® Mount with ½" Thread



MJB-050-XX* MJB-050
Mini J-Box for ½" Thread



753900
Super Slot Spike



250015840000
Long Slot Spike



250020020000
Three-Prong Spike



VHR-UL VHRUL
Variable Height Riser for Up Lights



SJ-XX* SJ
Super J-Box Spike



GM-SS
Gutter Mount



YY*-R-GT-XX*
1.0" (25 mm) Copper Riser for GT Path Light



PARS
ProAim® Ratcheting Spike



250030410000SP
Lock Ring

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage