Vantage™ MP Accent Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Small in size, the lamped MP easily integrates into any intimate garden space while the integrated QZ offers Luxor compatibility for zoning and dimming.

Quick Facts

- Built-in angled glare-control for maximum comfort in the space
- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum security and adjustability

MP Dimensions

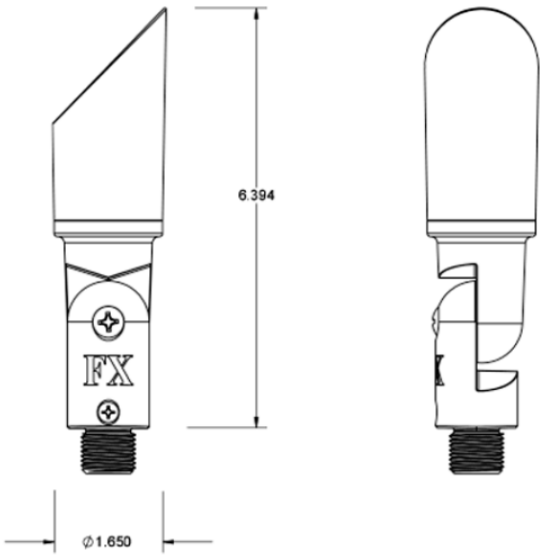

MR-11 Photometrics

MR11ECO20WFL - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 33.9 °
3.3' (1.0 m)	29.7 fc (320 lx)	2.0' (0.6 m)
6.7' (2.0 m)	7.2 fc (78 lx)	4.1' (1.3 m)
10.0' (3.0 m)	3.2 fc (35 lx)	6.1' (1.9 m)
13.3' (4.1 m)	1.8 fc (19 lx)	8.1' (2.5 m)
16.7' (5.1 m)	1.2 fc (13 lx)	10.2' (3.1 m)

MR11ECO20SFL - Illuminance at a Distance

Distance	Center Beam fc	Beam Width
Feet (Meters)	Foot-Candles (Lux)	Vertical : 32.6 °
3.3' (1.0 m)	35.5 fc (382 lx)	1.9' (0.6 m)
6.7' (2.0 m)	8.6 fc (93 lx)	3.9' (1.2 m)
10.0' (3.0 m)	3.9 fc (42 lx)	5.9' (1.8 m)
13.3' (4.1 m)	2.2 fc (24 lx)	7.8' (2.4 m)
16.7' (5.1 m)	1.4 fc (15 lx)	9.8' (3.0 m)

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast zinc/aluminum alloy housing, shroud, and knuckle with stainless steel hardware.
LED	ECO20
Finish	Two-layer protection of sulfuric acid anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.
Hardware	Stainless steel angle lock screw with setscrew. Includes 10" (254 mm) ABS slotted installation spike.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 16" (405 mm) length
Sockets	GU4 socket with retaining clips for MR-11 lamps. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.
Glare Control	Die-cast zinc/aluminum alloy shroud with 15° cutoff.
Weight	1.3 lbs (0.6 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the upward direction only.
Warranty	10-year limited warranty on fixture; 3-year limited warranty on LED lamp

LISTINGS

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

MP				
MODEL	LAMP	LED COLOR	OPTIC	FINISH

LAMP

- ☐ **ECO20** — 4.2 VA LED MR-11 lamp (ECO lamp series)
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

OPTIC

- ☐ **[Default]** — NL Lamp
- ☐ **FL** — Flood (35°)

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

Accessories

MOUNTING

- ☐  **PM-XX*** PM
  Post Mount
- ☐  **VB-050-XX*** VB-050
  VersaBox® Mount with ½" Thread
- ☐  **TB-XX*** TB
  TreeBox® Mount with ½" Thread
- ☐  **250015840000**
  Long Slot Spike
- ☐  **VHR-UL** VHRUL
  Variable Height Riser for Up Lights
- ☐  **MM-050-XX*** MM-050
  Mini Mount
- ☐  **WP-RD-050-XX*** WP-RD-050
  Round Wall Plate with ½" Thread
- ☐ **YY*-R-XX***
  Aluminum Riser, ¾" Diameter
- ☐  **ELBW-050-XX*** ELBW-050
  90° Coupling
- ☐  **PARS**
  ProAim® Ratcheting Spike
- ☐  **GM-XX*** GM
  Ground Mount with ½" Thread
- ☐  **MJB-050-XX*** MJB-050
  Mini J-Box for ½" Thread
- ☐  **753900**
  Super Slot Spike
- ☐  **250020020000**
  Three-Prong Spike
- ☐  **SJ-XX*** SJ
  Super J-Box Spike
- ☐  **WP-1G-050-XX*** WP-1G-050
  Single-Gang Wall Plate with ½" Thread
- ☐  **GM-SS**
  Gutter Mount
- ☐  **COUP-XX*** COUP
  Straight Coupling
- ☐  **TMNT-050-XX*** TMNT-050
  T-Mount Coupling with ½" Thread
- ☐  **eKitSpike**
  CE Certified Spike



250030410000SP
Lock Ring



LG-NF
LG Lite Guard

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage

SPLICING



WCHSBS2
Brass Lug Wire Connectors, 2-pack



WCHSBS50
Brass Lug Wire Connectors, 50-item Bulk Pack



WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small



WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium



WCHSTOOL
Ratcheting Crimper Tool