Vantage™ MD Down Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

This versatile directional down light offers several mounting options.

Quick Facts

- Built with durable, lightweight aluminum housing that withstands any weather condition
- Utilizes a premium lamp socket with a ceramic base and retaining clips for a secure and long-lasting hold
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Includes Mini Mount wall bracket for easy installation right out of the box
- Angled or straight glare-control options
- Built-in, spring-loaded lamp positioning for maximum control over glare and photometry
- Available in a warm (2700K) color temperature
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

MD Dimensions

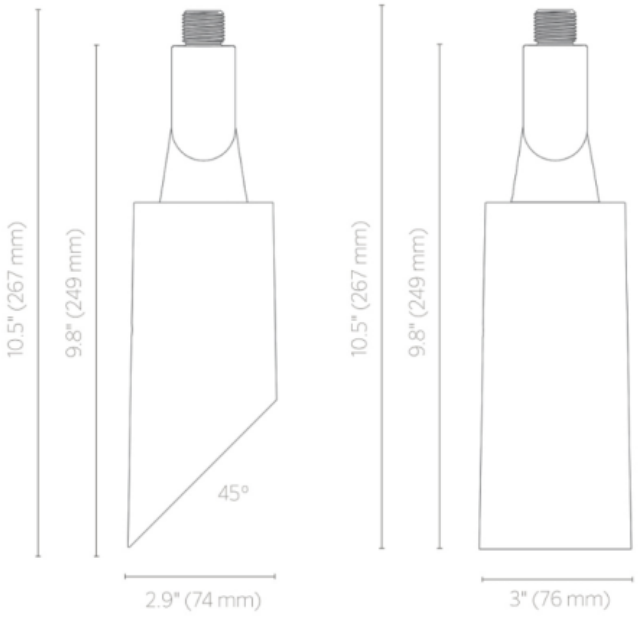

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	ECO20

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Model Configurator

MD							
MODEL	LIGHTING ENGINE	LAMP	LED COLOR	OPTIC	COMPLIANCE	GLARE CONTROL	FINISH

LIGHTING ENGINE

- ☐ **MR-16**

LAMP

- ☐ **ECO20**
  4.2 VA LED MR-11 lamp (ECO lamp series)
- ☐ **LED20**
  4.3 VALED MR-16 Lamp (PRO Lamp Series)
- ☐ **LED35**
  5.4 VA LED MR-16 Lamp (PRO Lamp series)
- ☐ **LED50**
  6.5 VA LED MR-16 Lamp (LED Lamp series)
- ☐ **NL**
  Lamp Not Included
- ☐ **ZD35**
  5.4 VA LED MR-16 Lamp (ZD Lamp series

LED COLOR

- ☐ **[Default]**
  No Lamp
- ☐ **W**
  Warm (2700K)

OPTIC

- ☐ **[Default]**
  NL Lamp
- ☐ **FL**
  Flood (35°)

COMPLIANCE

- ☐  **[Default]**
  North America (UL Listed)
- ☐  **E**
  International (CE Certified)

GLARE CONTROL

- ☐ **[Default]**
  45° Angled Shroud
- ☐ **SS**
  Straight Shroud

FINISH

- **BZ** Bronze Metallic
- **FB** Black
- **SB** Sedona Brown
- **DG** Desert Granite
- **WI** Weathered Iron
- **FW** Flat White
- **SV** Silver

Accessories

MOUNTING



VB-050-XX* VB-050
VersaBox® Mount with ½" Thread



MJB-050-XX* MJB-050
Mini J-Box for ½" Thread



TB-XX* TB
TreeBox® Mount with ½" Thread



WM-XX* WM
Wall Mount Knuckle



MM-050-XX* MM-050
Mini Mount



WP-1G-050-XX* WP-1G-050
Single-Gang Wall Plate with ½" Thread



WP-RD-050-XX* WP-RD-050
Round Wall Plate with ½" Thread

YY*-R-XX*
Aluminum Riser, ¾" Diameter



COUP-XX* COUP
Straight Coupling



ELBW-050-XX* ELBW-050
90° Coupling



TMNT-050-XX* TMNT-050
T-Mount Coupling with ½" Thread



YY*-R-SL-XX*
Sign Light Riser, Aluminum



YY*-R-GT-XX*
1.0" (25 mm) Copper Riser for GT Path Light



TR-YY*-8P-XX* TR
Tree Ring

- [ ]  **TR-JB-LL-XX*** TR-JB-LL
- [ ]  **TR-JB-T-XX**** TR-JB-T
- [ ]  **S-Riser**

POWER

- [ ]  **MT-6W**
  Plug-In Transformer, 6 W
- [ ]  **ST-UV**
  Step-Down Transformer, UV (120/277 V to 12 V)
- [ ]  **SURGE-MOD**
  Surge Protection Module
- [ ]  **LCM-LV**
  Luxor Cube - Low-Voltage
- [ ]  **ST-HV**
  Step-Down Transformer (120V to 12V)
- [ ]  **ST-120-DIM**
  Step-Down Transformer, Dimmable (120 V to 12 V)
- [ ]  **MT-30W**
  Mini Plug-In Transformer, 30 W
- [ ]  **DIM-LV**
  Low-Voltage Dimmer

SPLICING

- [ ]  **WCHSBS2**
  Brass Lug Wire Connectors, 2-pack
- [ ]  **WCHSBS50**
  Brass Lug Wire Connectors, 50-item Bulk Pack
- [ ]  **WCHSSM20**
  Heat Shrink Wire Connectors, 20-pack, Small
- [ ]  **WCHSMD20**
  Heat Shrink Wire Connectors, 20-pack, Medium