Garden™ CP Wall Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Featuring a durable, copper construction, these recessed fixtures bring light to walkways, stairways, and decks. Use the 20 W LM on its own or pair it with the 10 W CP to maintain a consistent style.


Quick Facts

- Slim, unobtrusive low-profile design offers minimalist aesthetics to accommodate other elements inside the wall
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) and soft (3000K) color temperatures
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences
- Custom recessed installation kit included

CP Dimensions

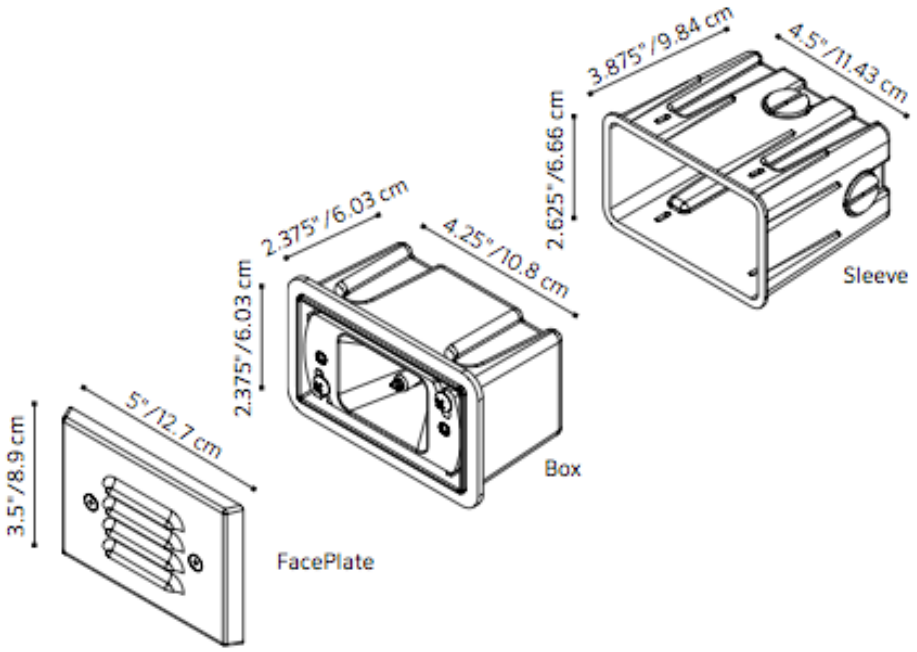

CP Photometrics

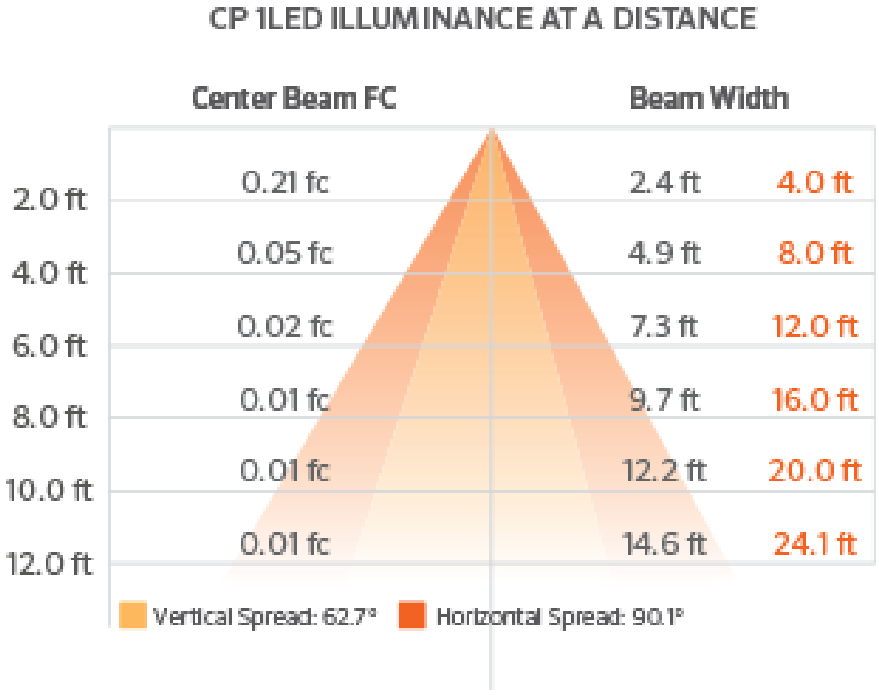

CP Spec Chart

	1 LED

Halogen Lumen Output Equivalent	10W
Useful LED Life (L70)	50,000 hrs avg
Input Voltage	10 to 15V
VA Total (Use this number to size the transformer)	2.4
Watts Used	2.0
Lumens per Watt (Efficacy)5	5
Max Lumens	10
CRI (Ra)	86
CCT	
Amber Filter	2700K

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Stamped C110 copper faceplate, A380 aluminum housing, PBT construction box/sleeve, and stainless steel hardware.
LED	LED20
Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (pre-installed), 3,900K (no lens), 4,500K and 5,200K options specified separately. Color temperature lenses are field serviceable.
Finish	Options of natural copper finish, antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect, or TGIC powder coat finish. Antique finishes sealed with a clear TGIC powder coat layer.
Hardware	Tamper-resistant stainless steel fasteners included.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length

Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	2.3 lbs. (1.0 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Compliant per IEC 60598-1 and IEC 60598-2-7 when used with International Wall Kit (“EKITWALL”).

LISTINGS

ADDITIONAL CERTIFICATIONS

UL 1838

Required accessory for CE compliance: eKitWall

Model Configurator

CP						
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LAMP	LED COLOR	FINISH

LIGHTING ENGINE

- ☐ **Powerboard Integrated LED**
- ☐ **G4**

LUXOR CONTROL

- ☐ **ZD**
  Zone/Dim with Luxor

POWER

- ☐ **1LED** — 2.4 VA

LAMP

- ☐ **LED20** — 1.3 VA G4 Lamp (20W equivalent Lamp)
- ☐ **E2** — 1.3 VA G4 LED Lamp (Eco Lamp Series)

LED COLOR

- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

FINISH

- ☐ **AB** — Antique Bronze
- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver
- ☐ **CU** — Natural Copper

Accessories

MOUNTING

- ☐  **eKitWall**

POWER

- ☐  **MT-6W** — Plug-In Transformer, 6 W
- ☐  **ST-UV** — Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD

Surge Protection Module



LCM-LV

Luxor Cube - Low-Voltage