Garden™ LM LED Wall Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Featuring a durable, copper construction, these recessed fixtures bring light to walkways, stairways, and decks. Use the 20 W LM on its own or pair it with the 10 W CP to maintain a consistent style.


Quick Facts

- Slim, unobtrusive low-profile design offers minimalist aesthetics to accommodate other elements inside the wall
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) and soft (3000K) color temperatures
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences
- Custom recessed installation kit included

LM Dimensions

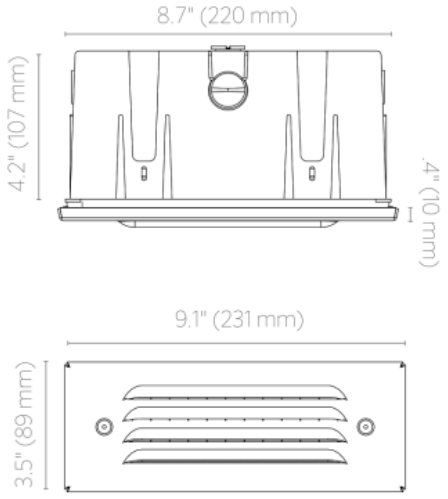

LM Photometrics

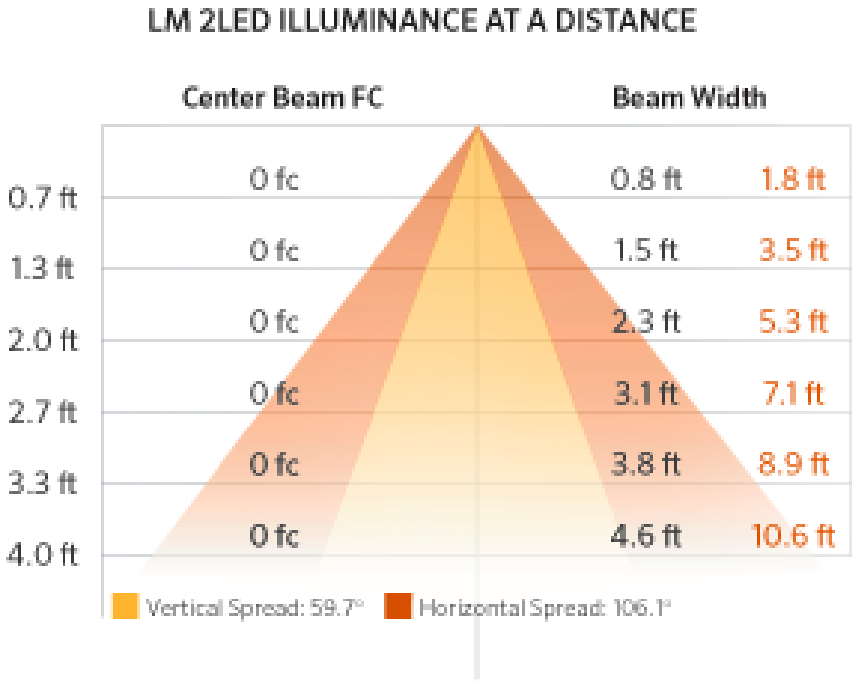

LM Spec Chart

Light Source	2 LED	G4 LED Lamp
Total Lumens (lm)	35	30

Light Source	2 LED	G4 LED Lamp
Power Consumption (VA)	4.5	2.6
Efficacy	9	
LED Color	2700K	
Input Voltage	10 to 15V	10 to 15V
Color Rendering Index (CRI)	87	
Minimum Rated Life (L70)	72,000	33,000

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Stamped C110 copper faceplate, A380 aluminum housing, PBT construction box/sleeve, and stainless steel hardware.
LED	E4
Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (pre-installed), 3,900K (no lens), 4,500K and 5,200K options specified separately. Color temperature lenses are field serviceable.
Finish	Options of natural copper finish, antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect, or TGIC powder coat finish. Antique finishes sealed with a clear TGIC powder coat layer.
Hardware	Tamper-resistant stainless steel fasteners included.
Wiring	18 AWG (1 mm); SPT-1W; 200°F (105°C); 300V; 10' (3 m) length.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	3.6 lbs. (1.6 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements Designed for recessed installation in a vertical wall in the down lighting position only.

LISTINGS

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: eKitWall

Model Configurator

LM						
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LAMP	LED COLOR	FINISH

LIGHTING ENGINE

- ☐ **Powerboard Integrated LED**
- ☐ **G4**

LUXOR CONTROL

- ☐ **ZD**
  Zone/Dim with Luxor

POWER

- ☐ **2LED**
  4.5 VA

LAMP

- ☐ **E4** — 2 x 1.3 VA G4 LED Lamp (Eco Lamp Series)
- ☐ **LED40** — 2 x 1.3 VA G4 LED Lamp (Eco Lamp Series)

LED COLOR

- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

FINISH

- ☐ **AB** — Antique Bronze
- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver
- ☐ **CU** — Natural Copper

Accessories

MOUNTING

- ☐  **eKitWall**

POWER

- ☐  **MT-6W** — Plug-In Transformer, 6 W
- ☐  **ST-UV** — Step-Down Transformer, UV (120/277 V to 12 V)
- ☐  **SURGE-MOD** — Surge Protection Module
- ☐  **LCM-LV** — Luxor Cube - Low-Voltage