Garden™ UN Recessed Wall Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Sharing the same organic look, the 20 W PD and 10 W UN can be used together or individually to wash walkways with a shadow-free, smooth illumination.

Quick Facts

- Premium, corrosion-resistant brass construction protects internal and external elements of the fixture
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) color temperature
- Custom recessed installation kit included

UN Dimensions

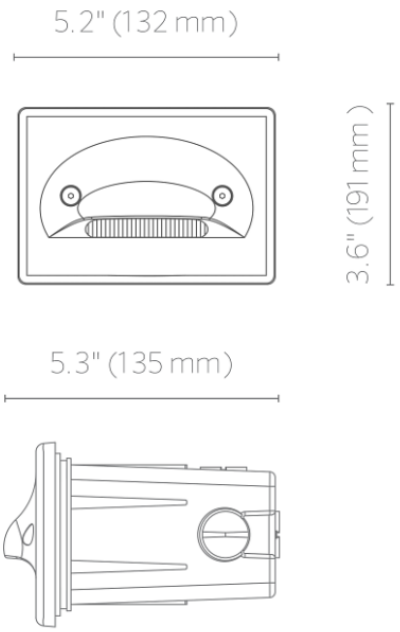

UN Spec Chart

	LED20W	1LED
Total Lumens (lm)	10	43
Power Consumption (VA)	1.3 VA	2.4 VA
Efficacy (lm/W)	8	24
Correlated Color Temperature (CCT)	2700K	2700K
Maximum Candela (cd)	--	44
Color Rendering Index (CRI)	83+	83+
Input Voltage (V)	10 to 15 V	10-15 V
Dimming	Phase	Phase
BUG Rating	B0-U1-G0	B0-U1-G0
Minimum Rated Life (L70)	33,000 Hrs	72,000 Hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast C360 brass faceplate, A380 aluminum housing, PBT construction box/sleeve, and stainless steel hardware.
LED	LED20
Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens). 4,500K and 5,200K options specified separately. Color temperature lenses are field serviceable.
Finish	Options of natural brass finish, antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect, or TGIC powder coat finish. Antique finishes sealed with a clear TGIC powder coat layer.
Hardware	Tamper-resistant stainless steel fasteners included.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	2.3 lbs. (1 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for recessed installation in a vertical wall in the down lighting position only.

LISTINGS



ADDITIONAL CERTIFICATIONS



CB Scheme, UL 1838

Required accessory for CE compliance: eKitWall

Model Configurator

UN						
MODEL	LIGHTING ENGINE	LUXOR CONTROL	POWER	LAMP	LED COLOR	FINISH

LIGHTING ENGINE

- ☐ **G4**

LUXOR CONTROL

- ☐ **ZD**
  Zone/Dim with Luxor

POWER

- ☐ **1LED**
  2.4 VA

LAMP

- ☐ **LED20**
  1.3 VA G4 Lamp (20W equivalent Lamp)

LED COLOR

- ☐ **W**
  Warm (2700K)

FINISH

- ☐ **BS** Natural Brass
- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White
- ☐ **SV** Silver
- ☐ **CB** Camo Bronze
- ☐ **DT** Desert Tan

Accessories

MOUNTING

- ☐  **eKitWall**

POWER

- ☐  **MT-6W** Plug-In Transformer, 6 W
- ☐  **ST-UV** Step-Down Transformer, UV (120/277 V to 12 V)
- ☐  **SURGE-MOD** Surge Protection Module
- ☐  **LCM-LV** Luxor Cube - Low-Voltage