Cora™ CW-31 Petite Wall Wash



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Designed to outlast any landscape, the CW-31's minimal size makes it the perfect choice for projects that may require a smaller fixture footprint or soft, filtered light.

Quick Facts

- Preinstalled with a 10' (3 m) or extra-long 26' (8 m) wire lead for high and hard-to-reach installations
- Solid brass construction and black oxide stainless steel hardware deliver strong corrosion resistance
- Directional flood and wall wash fixture offers added design flexibility
- Provides soft, filtered light — great for tying in focal points
- Antique bronze finish provides increased durability and elegant look
- Available in a warm (2700K) and soft (3000K) color temperatures.

CW 31 Dimensions

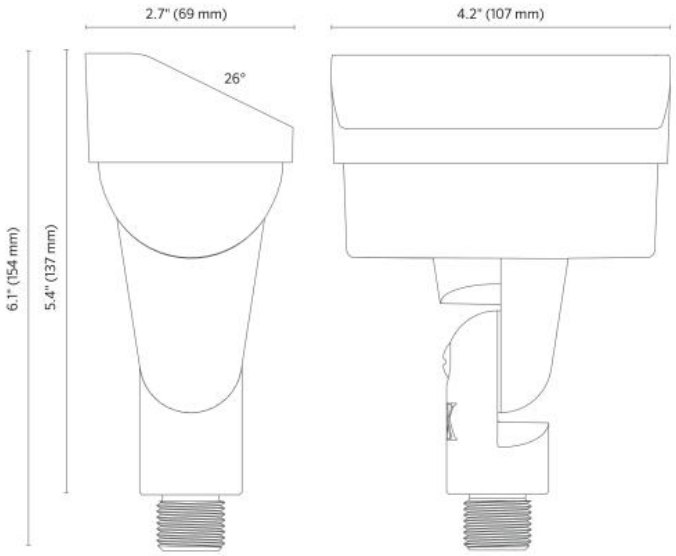

CW-31 Specification Chart

Output	E3S
Total Lamp Lumens (lm)	66
Input Voltage VAC/VDC	10 to 15
Power Consumption (VA)	1.7
Efficacy (Lm/W)	41
Color Rendering Index (CRI)	80+
Maximum Candela (cd)	39
Minimum Rated Life (L70)	33,000 hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Brass fixture with black oxide stainless steel hardware
LED	E3
Optics	Internal reflector
Threads	½"-14 NPSM
Adjustability	Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.
Finish	Antique Bronze finish sealed with a clear TGIC powder-coat layer
Hardware	Black oxide stainless steel adjustment screw (Phillips). Includes 7" ABS slotted installation spike.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Glare Control	20° angled shield
Weight	1.9 lb (0.7 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)
Lens Transparency	Frosted

SUSTAINABILITY & MANUFACTURING

Sustainability	Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high quality light at optimal energy efficiency, lifespan, and durability.
Installation Requirements	Must be installed in the upward direction only
Manufacturing	ISO 9001:2015 certified facility
Warranty	Fixture: 10-year limited Included Lamp: 5-year limited

LISTINGS

c UL us LISTED · UL-NOM · IP65

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

CW31				
MODEL	LAMP	LED COLOR	WIRE LEAD	FINISH

LAMP

- ☐ **E3** — 1.7 VA G4 LED Lamp (Eco Lamp Series)
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)

WIRE LEAD

- ☐ **[Default]** — 10' (3 m)
- ☐ **XL** — 26' (8 m) Lead

FINISH

- ☐ **AB** — Antique Bronze
- ☐ **FB** — Black

Accessories

MOUNTING

- ☐  **PM-XX*** PM — Post Mount
- ☐  **GM-XX*** GM — Ground Mount with ½" Thread
- ☐  **VB-050-XX*** VB-050 — VersaBox® Mount with ½" Thread
- ☐  **MJB-050-XX*** MJB-050 — Mini J-Box for ½" Thread

- [ ]  **TB-XX*** TB
TreeBox® Mount with ½" Thread

- [ ]  **753900**
Super Slot Spike

- [ ]  **250015840000**
Long Slot Spike

- [ ]  **250020020000**
Three-Prong Spike

- [ ]  **VHR-UL** VHRUL
Variable Height Riser for Up Lights

- [ ]  **SJ-XX*** SJ
Super J-Box Spike

- [ ]  **GM-SS**
Gutter Mount

- [ ]  **TR-YY*-8P-XX*** TR
Tree Ring

- [ ]  **PARS**
ProAim® Ratcheting Spike

- [ ]  **eKitSpike**
CE Certified Spike

- [ ]  **2500304100000SP**
Lock Ring

- [ ]  **BM-050-C-AB**
Bracket Mount

- [ ]  **RSR-S-125-XX*-R-MF-B-AB** RSRS125MFBAB
1.25" (32MM) Select Brass Riser

POWER

- [ ]  **MT-6W**
Plug-In Transformer, 6 W

- [ ]  **ST-UV**
Step-Down Transformer, UV (120/277 V to 12 V)

- [ ]  **SURGE-MOD**
Surge Protection Module

- [ ]  **LCM-LV**
Luxor Cube - Low-Voltage

- [ ]  **ST-120-DIM**
Step-Down Transformer, Dimmable (120 V to 12 V)

- [ ]  **MT-30W**
Mini Plug-In Transformer, 30 W

- [ ]  **DIM-LV**
Low-Voltage Dimmer

- [ ]  **DX150M**

- [ ]  **DX150SS**
- [ ]  **DX300M**
- [ ]  **DX300SS**
- [ ]  **EX-150-M**
- [ ]  **EX-150-SS**
- [ ]  **PX-300-SS**
- [ ]  **PX-600-SS**
- [ ]  **PX-900-SS**

SPLICING

- [ ]  **WCHSBS2**
  Brass Lug Wire Connectors, 2-pack
- [ ]  **WCHSBS50**
  Brass Lug Wire Connectors, 50-item Bulk Pack
- [ ]  **WCHSSM20**
  Heat Shrink Wire Connectors, 20-pack, Small
- [ ]  **WCHSMD20**
  Heat Shrink Wire Connectors, 20-pack, Medium
- [ ]  **WCHSTOOL**
  Ratcheting Crimper Tool