Stella™ SP Petite Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Perfect for tight garden spaces or urban rooftop gardens, these sleek copper and brass path lights offer durability and unmatched beauty.

Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Premium, corrosion-resistant copper and brass construction protects internal and external elements of the fixture
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) color temperature

SP Dimensions

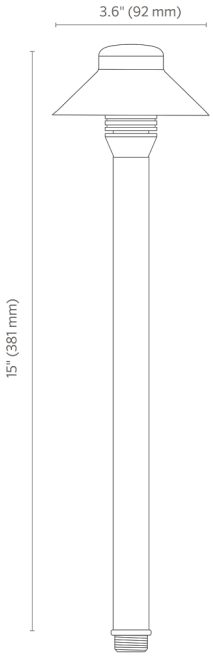

SPA Spec Chart

Output	NL (No Lamp)	LED20W
Total Lumens		35
Input Voltage	10 to 15v	11 to 15v
Power Consumption (VA)		1.3
Lumens per Watt (Efficacy)		30
CRI (Ra)		81
Dimming	PWM, Phase**	Phase*
Luxor Compatibility		
ZD Option		Use Luxor Cube (LCM-LV)
Minimum Rated Life (Hrs, L70)		33,000 Hrs

**For optimal performance, use trailing edge phase cut dimmer.

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

SP					
MODEL	LAMP	LED COLOR	OPTIC	RISER	FINISH

LAMP

- ☐ **LED20** — 1.3 VA G4 Lamp (20W equivalent Lamp)
- ☐ **NL** — Lamp Not Included

LED COLOR

- ☐ **[Default]** — No Lamp
- ☐ **W** — Warm (2700K)

OPTIC

- [ ] **[Default]**
  NL Lamp

RISER

- [ ] **12R**
  12'' Riser
- [ ] **18R**
  18'' Riser

FINISH

- [ ] **AB**
  Antique Bronze
- [ ] **BZ**
  Bronze Metallic
- [ ] **CU**
  Natural Copper

Accessories

MOUNTING

- [ ] 
  PM-XX* PM
  Post Mount
- [ ] 
  GM-XX* GM
  Ground Mount with ½" Thread
- [ ] 
  VB-050-XX* VB-050
  VersaBox® Mount with ½" Thread
- [ ] 
  MJB-050-XX* MJB-050
  Mini J-Box for ½" Thread
- [ ] 
  753900
  Super Slot Spike
- [ ] 
  250015840000
  Long Slot Spike
- [ ] 
  250020020000
  Three-Prong Spike
- [ ] 
  VHR-UL VHRUL
  Variable Height Riser for Up Lights
- [ ] 
  SJ-XX* SJ
  Super J-Box Spike
- [ ] 
  YY*-R-GT-XX*
  1.0" (25 mm) Copper Riser for GT Path Light
- [ ] 
  PARS
  ProAim® Ratcheting Spike

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module



LCM-LV
Luxor Cube - Low-Voltage