Runa™ ZC Surface-Mounted Down Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Ideal for modern architectural designs, the ZC is engineered for outdoor spaces where recessed down lights are not practical.

Quick Facts

- Surface-mounted with stainless steel hardware
- Factory-sealed construction
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color and dynamic RGBW color-changing options
- DarkSky approved with a U0 BUG rating for a glare-free experience

ZC Dimensions

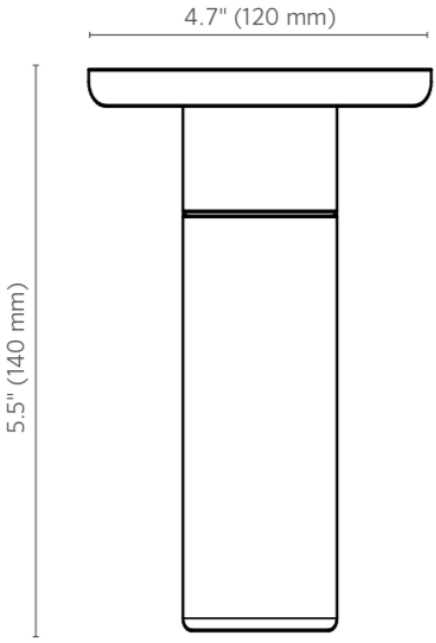

ZC Spec Chart

Output	1LED	3LED	ZDC
Total Lumens†	56	179	180-255
Input Voltage	10 to 15V	10 to 15V	10 to 15V
Input Power (W)	2.0	4.2	6.0
VA	2.4	4.5	7.2
Efficacy (Lumens/Watt)	28	42	--
Color Rendering Index (CRI)	80+	80+	80+
Center Beam Candlepower*			
Spot (17-20)	121	388	--
Dimming	PWM, Phase	PWM, Phase	--
RGBW Available	No	No	Yes
Luxor Compatibility			
Default	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	Zoning/Dimming/Color

Output	1LED	3LED	ZDC
Minimum Rated Life (L90 B10)	55,00 Hrs avg	55,000 Hrs avg	55,000 Hrs avg

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast aluminum or copper body with stainless steel hardware and mounting bracket.
Optics	Polycarbonate 2,700K color temperature adjustment lens included with fixture. Beam angle is calculated using LM-79 method for SSL fixtures.
Finish	Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards. Also available in natural copper (CU).
Hardware	Includes stainless steel mounting brackets for quick assembly.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture
Weight	1.3 lbs. (0.6 kg)
Ambient Operating Temperature	-4°F to 104°F (-20°C to 40°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation to a vertical surface.

LISTINGS

Model Configurator

ZC				
MODEL	LUXOR CONTROL	POWER	LED COLOR	FINISH

LUXOR CONTROL

- ☐ **ZD** — Zone/Dim with Luxor
- ☐ **ZDC** — Zone/Dim/Color with Luxor (Medium Round 3 LED)

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Default ZDC option 11.0 VA

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver
- ☐ **CU** — Natural Copper