Designer™ VC Down Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The low-profile VC provides a quick and simple method for ceiling installations and features advanced dimming and control capabilities via Luxor® Technology.

Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Built with durable, lightweight aluminum housing that withstands any weather condition
- Minimal visible hardware for a clean and elegant design, day or night
- Slim, unobtrusive low-profile design offers minimalist aesthetics to accommodate other elements inside the wall
- Factory-sealed construction
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller
- Available in a warm (2700K) color temperature
- DarkSky approved with a U0 BUG rating for a glare-free experience

VC Dimensions

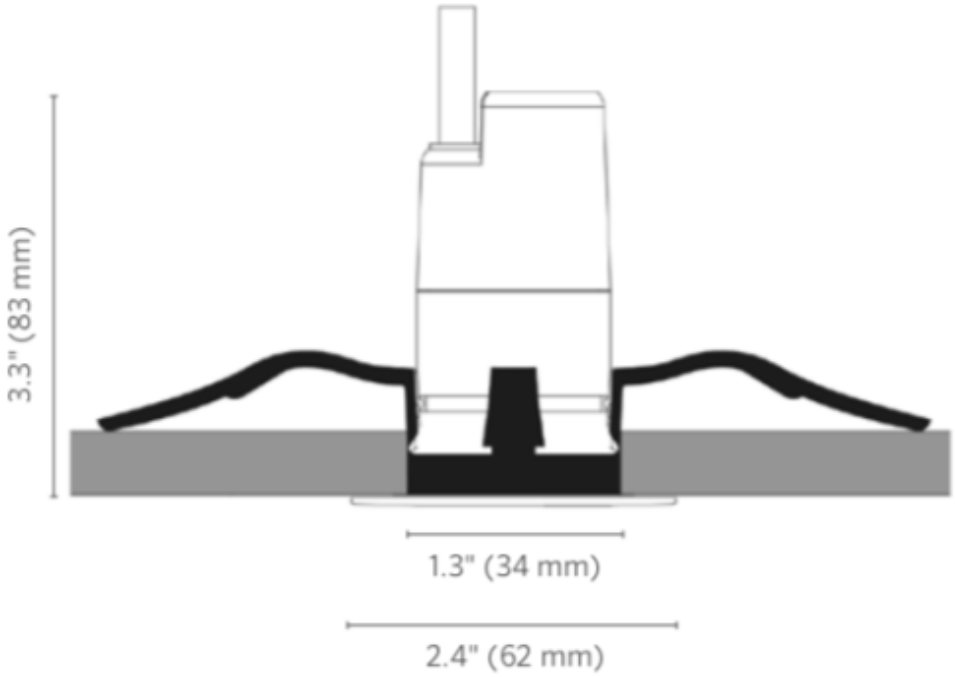

VC Photometrics

VC 1LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width
	Foot-Candle (Lux)	Vertical 33.8°
2.0' (0.6 m)	107.0 fc (1,152 lx)	1.2' (0.4 m)
4.0' (1.2 m)	26.8 fc (289 lx)	2.4' (0.7 m)
6.0' (1.8 m)	11.9 fc (128 lx)	3.6' (1.1 m)
8.0' (2.4 m)	6.7 fc (72 lx)	4.9' (1.5 m)
10.0' (3.1 m)	4.3 fc (46 lx)	6.1' (1.9 m)
12.0' (3.7 m)	3.0 fc (31 lx)	7.3' (2.2 m)

VC Spec Chart

Output	1LED
Total Lumens	156

Input Voltage	10 to 15V
Input Power (W)	2.8
VA	3.3
Efficacy (Lumens/Watt)	56
Color Rendering Index (CRI)	80+
Center Beam Candlepower	436
Dimming	PWM, Phase
RGBW Available	No
Luxor Compatibility	
Default	--
ZD Option	Zoning/Dimming
ZDC Option	--
Minimum Rated Life (L70 B10)	55,000 Hrs avg

ADDITIONAL CERTIFICATIONS

Model Configurator

VC				
MODEL	LUXOR CONTROL	POWER	LED COLOR	FINISH

LUXOR CONTROL

☐ **ZD**
Zone/Dim with Luxor

POWER

☐ **1LED**
2.4 VA

LED COLOR

[Default]
Warm (2700K)

FINISH

FW
Flat White