Designer™ QB Accent Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The lamped VW-31 offers a 45° beam angle while the integrated QB provides a 90° spread and Luxor Technology compatibility. Both wall washes feature a small footprint that allows them to blend easily into any landscape.

Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Built with durable, lightweight aluminum housing that withstands any weather condition
- Delivers soft wash and seamless transitions for enhanced uniformity and a more pleasant visual experience
- Frosted glass lens provides soft, even light distribution
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Sturdy ground stake and rotational Lock Ring included for maximum sercurity and adjustability
- Built-in angled glare-control for maximum comfort in the space
- Available in a warm (2700K) color temperature
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

QB Dimensions

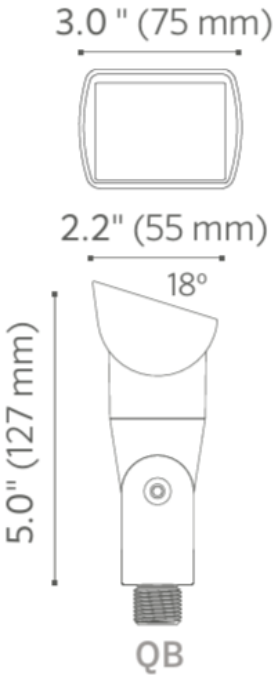

QB Spec Chart

Number of LEDs	1
Halogen Lumen Output Equivalent	10 Watts
Useful LED Life (L70)	50,000 hrs avg
Input Voltage	10 to 15V
VA Total (Use this number to size the transformer)	2.4
Watts Used	2.0
Lumens per Watt (Efficacy)	37
Max Lumens	120
CRI (Ra)	85

Required accessory for CE compliance: GM-XX

Model Configurator

QB				
MODEL	LUXOR CONTROL	POWER	LED COLOR	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor

POWER

- ☐ **1LED** 2.4 VA

LED COLOR

- ☐ **[Default]** Warm (2700K)

FINISH

- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White
- ☐ **SV** Silver

Accessories

MOUNTING

☐ 
PM-XX* PM
Post Mount

☐ 
VB-050-XX* VB-050
VersaBox® Mount with ½" Thread

☐ 
TB-XX* TB
TreeBox® Mount with ½" Thread

☐ 
250015840000
Long Slot Spike

☐ 
VHR-UL VHRUL
Variable Height Riser for Up Lights

☐ 
WM-XX* WM
Wall Mount Knuckle

☐ 
WP-1G-050-XX* WP-1G-050
Single-Gang Wall Plate with ½" Thread

☐ 
GM-SS
Gutter Mount

☐ 
COUP-XX* COUP
Straight Coupling

☐ 
TMNT-050-XX* TMNT-050
T-Mount Coupling with ½" Thread

☐ 
GM-XX* GM
Ground Mount with ½" Thread

☐ 
MJB-050-XX* MJB-050
Mini J-Box for ½" Thread

☐ 
753900
Super Slot Spike

☐ 
250020020000
Three-Prong Spike

☐ 
SJ-XX* SJ
Super J-Box Spike

☐ 
MM-050-XX* MM-050
Mini Mount

☐ 
WP-RD-050-XX* WP-RD-050
Round Wall Plate with ½" Thread

☐
YY*-R-XX*
Aluminum Riser, ¾" Diameter

☐ 
ELBW-050-XX* ELBW-050
90° Coupling

☐ 
YY*-R-SL-XX*
Sign Light Riser, Aluminum



TR-YY*-8P-XX* TR
Tree Ring



PARS
ProAim® Ratcheting Spike



250030410000SP
Lock Ring

POWER



MT-6W
Plug-In Transformer, 6 W



ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD
Surge Protection Module