Pinnacle™ SC LED Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Pinnacle™ Petite Copper Riser

Quick Facts

- Copper/brass construction
- Cree® Integrated LEDs
- Compatible with Luxor® technology
- Input voltage: 10-15V
- Natural, powder coated, or antiqued copper/brass
- Color temperature filters
- Phase and PWM dimmable

SC Dimensions

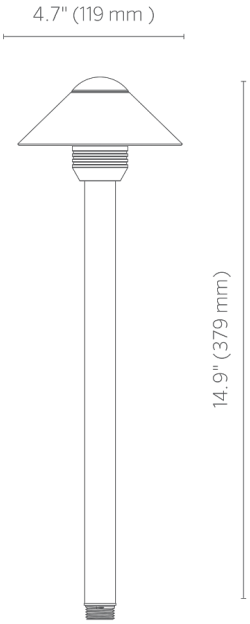

SC Spec Chart

Number of LEDs	1
Halogen Lumen Output Equivalent	10 Watt
Useful LED Life (L70)	50,000 hrs avg
Input Voltage	10 to 15V
VA Total (Use this number to size the transformer)	2.4
Watts Used	2
Lumens per Watt (Efficacy)	19.4
Max Lumens	39
CRI (Ra)	86
CCT	
Amber Filter	2700K
Green Filter	4500K
Blue Filter	5200K

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Machined C360 brass cap and reducer with stainless hardware. Spun C110 copper top/shade and extruded C110 copper riser.
Optics	Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens) 4,500K, and 5,200K. Conical reflector maximizes distribution according to riser height. Color temperature lenses field serviceable.
Threads	Machined brass fitting with ½"-14 (13 mm) NPSM threads.

Finish	Options of natural copper/ brass finish, or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer. Brass accent pieces (cap and reducer) remain natural (not powder coated) for powder coat finishes.
Hardware	Includes 10” (254 mm) ABS slotted installation spike.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 3.6' (1.1 m) length with 12" (305 mm) riser.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	2.8 lbs (1.3 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the downward lighting direction only.

LISTINGS

c UL us LISTED · CE · RoHS COMPLIANT · IP65 · IDA

Required accessory for CE compliance: GM-XX

Model Configurator

Options are listed per model. Not every combination of options is an orderable catalog number — confirm the configured part number against the model’s SKU list before specifying.

P

P						
MODEL	LUXOR CONTROL	POWER	LED COLOR	OPTIC	RISER	FINISH

LUXOR CONTROL

☐	**[Default]** On/Off | Phase Dimmable | Zone with Luxor	☐	**ZD** Zone/Dim with Luxor

POWER

- [ ] **1LED**
  2.4 VA

LED COLOR

- [ ] **[Default]**
  Warm (2700K)
- [ ] **S**
  Soft (3000K)

OPTIC

- [ ] **[Default]**
  NL Lamp

RISER

- [ ] **12RA**
  12'' Riser Assembly
- [ ] **18RA**
  18'' Riser Assembly

FINISH

- [ ] **AB**
  Antique Bronze
- [ ] **BZ**
  Bronze Metallic
- [ ] **FB**
  Black
- [ ] **SB**
  Sedona Brown
- [ ] **DG**
  Desert Granite
- [ ] **WI**
  Weathered Iron
- [ ] **FW**
  Flat White
- [ ] **SV**
  Silver
- [ ] **CU**
  Natural Copper

SCLEDTA

SCLEDTA				
MODEL	LUXOR CONTROL	LED COLOR	OPTIC	FINISH

LUXOR CONTROL

- [ ] **[Default]**
  On/Off | Phase Dimmable | Zone with Luxor

LED COLOR

- [ ] **[Default]**
  Warm (2700K)

OPTIC

- [ ] **[Default]**
  NL Lamp

FINISH

- [ ] **AB**
  Antique Bronze
- [ ] **BZ**
  Bronze Metallic
- [ ] **FB**
  Black
- [ ] **SB**
  Sedona Brown
- [ ] **DG**
  Desert Granite
- [ ] **WI**
  Weathered Iron
- [ ] **FW**
  Flat White
- [ ] **SV**
  Silver
- [ ] **CU**
  Natural Copper

Accessories

MOUNTING

- [ ]
  PM-XX* PM
  Post Mount
- [ ] 
  GM-XX* GM
  Ground Mount with ½" Thread
- [ ] 
  VB-050-XX* VB-050
  VersaBox® Mount with ½" Thread
- [ ] 
  MJB-050-XX* MJB-050
  Mini J-Box for ½" Thread
- [ ] 
  753900
  Super Slot Spike
- [ ] 
  250015840000
  Long Slot Spike
- [ ] 
  250020020000
  Three-Prong Spike
- [ ] 
  VHR-UL VHRUL
  Variable Height Riser for Up Lights

- [ ] 
SJ-XX* SJ
Super J-Box Spike

- [ ] 
YY*-R-GT-XX*
1.0" (25 mm) Copper Riser for GT Path Light

- [ ] 
PARS
ProAim® Ratcheting Spike

POWER

- [ ] 
MT-6W
Plug-In Transformer, 6 W

- [ ] 
ST-UV
Step-Down Transformer, UV (120/277 V to 12 V)

- [ ] 
SURGE-MOD
Surge Protection Module

- [ ] 
LCM-LV
Luxor Cube - Low-Voltage