Stella™ CA LED Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Pinnacle™ CA Path Light Top Assembly


Quick Facts

- Copper/brass construction
- Lumileds® Integrated LEDs
- Phase and PWM dimmable
- Natural, powder coated, or antiqued copper/brass
- Compatible with Luxor® technology
- Input voltage: 10-15V

CA Dimensions

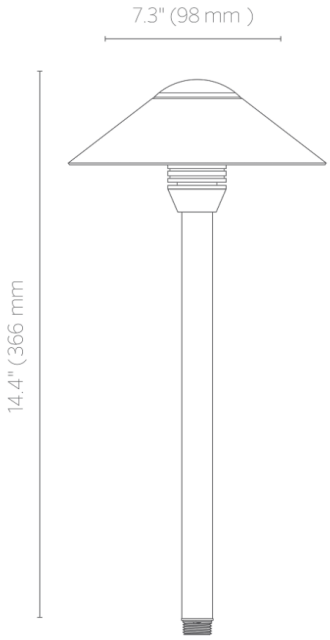

CA Photometrics (Lamped)

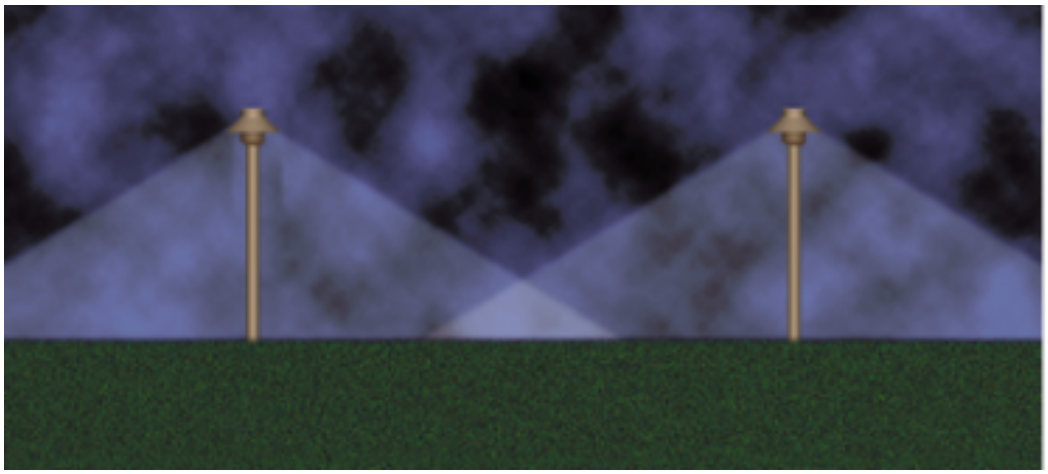



CA Spec Chart

Output	LED20W
Total Lumens (lm)	40
Power Consumption (VA)	1.3
Efficacy (lm/W)	36
Maximum Candelas (cd)	12
Correlated Color Temperature (CCT)	2700k
Color Rendering Index (CRI)	81
Input Voltage (V)	11 to 15V
Control	Phase-cut*
Rated Life (L70)	33,000 Hrs

* For optimal performance, use a trailing-edge (reverse phase-cut) dimmer.

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Machined C360 brass cap and reducer with stainless hardware. Spun C110 copper top/shade and extruded C110 copper riser.
LED	LED20
Optics	Conical reflector maximizes distribution according to riser height. Color temperature lenses accessories available.
Threads	Machined brass fitting with ½"-14" NPSM threads.
Finish	Options of natural copper/ brass finish, or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer. Brass accent pieces (cap and reducer) remain natural (not powder coated) for powder coated finishes.
Hardware	Includes 12" (305 mm) ABS slotted installation spike.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 3' (1 m) length with 12" (305 mm) riser.
Weight	4.0 lbs. (1.8 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)

SUSTAINABILITY & MANUFACTURING

Sustainability	Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high- quality light at optimal energy efficiency, lifespan, and durability.
Installation Requirements	Designed for installation in the downward lighting direction only.
Manufacturing	9001:2015 certified facility

LISTINGS

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: GM-XX

Model Configurator

Options are listed per model. Not every combination of options is an orderable catalog number — confirm the configured part number against the model's SKU list before specifying.

CALEDTA

CALEDTA					
MODEL	LUXOR CONTROL	POWER	LAMP	LED COLOR	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor

POWER

- ☐ **[Default]** Default ZDC Option 6.0W/7.2VA

LAMP

- ☐ **LED20** 4.3 VALED MR-16 Lamp (PRO Lamp Series)
- ☐ **NL** Lamp Not Included

LED COLOR

- ☐ **[Default]** Warm (2700K)

FINISH

- ☐ **AB** Antique Bronze
- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron

- [ ] **FW** Flat White
- [ ] **SV** Silver
- [ ] **CU** Natural Copper

G

G						
MODEL	LUXOR CONTROL	POWER	LAMP	LED COLOR	RISER	FINISH

LUXOR CONTROL

- [ ] **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- [ ] **ZD** Zone/Dim with Luxor
- [ ] **ZDC** Zone/Dim/Color with Luxor (Medium Round 3 LED)

POWER

- [ ] **1LED** 2.4 VA
- [ ] **3LED** 4.5 VA
- [ ] **[Default]** Default ZDC Option 6.0W/7.2VA

LAMP

- [ ] **LED20** 4.3 VALED MR-16 Lamp (PRO Lamp Series)
- [ ] **NL** Lamp Not Included

LED COLOR

- [ ] **[Default]** Warm (2700K)
- [ ] **S** Soft (3000K)
- [ ] **T** Wildlife-Friendly (585 to 595 nm)

RISER

- [ ] **12RA** 12'' Riser Assembly
- [ ] **18RA** 18'' Riser Assembly
- [ ] **24RA** 24'' Riser Assembly

FINISH

- [ ] **AB** Antique Bronze
- [ ] **BZ** Bronze Metallic
- [ ] **FB** Black
- [ ] **SB** Sedona Brown
- [ ] **DG** Desert Granite
- [ ] **WI** Weathered Iron

- [ ] **FW** Flat White
- [ ] **SV** Silver
- [ ] **CU** Natural Copper

Accessories

MOUNTING

- [ ]  **PM-XX*** PM
  Post Mount
- [ ]  **GM-XX*** GM
  Ground Mount with ½" Thread
- [ ]  **VB-050-XX*** VB-050
  VersaBox® Mount with ½" Thread
- [ ]  **MJB-050-XX*** MJB-050
  Mini J-Box for ½" Thread
- [ ]  **753900**
  Super Slot Spike
- [ ]  **250015840000**
  Long Slot Spike
- [ ]  **250020020000**
  Three-Prong Spike
- [ ]  **VHR-UL** VHRUL
  Variable Height Riser for Up Lights
- [ ]  **SJ-XX*** SJ
  Super J-Box Spike
- [ ]  **YY*-R-GT-XX***
  1.0" (25 mm) Copper Riser for GT Path Light
- [ ]  **PARS**
  ProAim® Ratcheting Spike

POWER

- [ ]  **MT-6W**
  Plug-In Transformer, 6 W
- [ ]  **ST-UV**
  Step-Down Transformer, UV (120/277 V to 12 V)
- [ ]  **SURGE-MOD**
  Surge Protection Module
- [ ]  **LCM-LV**
  Luxor Cube - Low-Voltage