Runa™ PO LED Wall Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Available in four unique shapes, the PO offers maximum design flexibility. The larger MO offers the same styles with a frosted glow, delivers more light output, and is the only 20 W equivalent wall light compatible with the Luxor® System.


Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Premium, corrosion-resistant brass construction protects internal and external elements of the fixture
- Minimal visible hardware for a clean and elegant design, day or night
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options


PO Dimensions

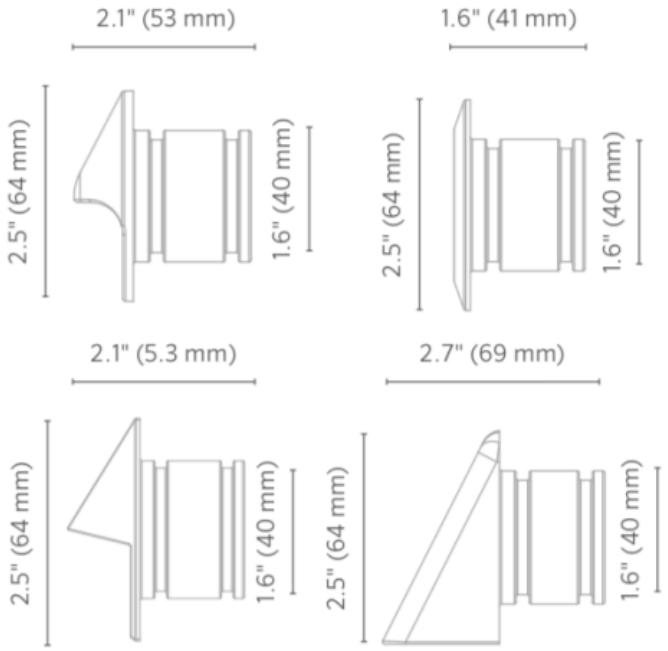


PO Photometrics

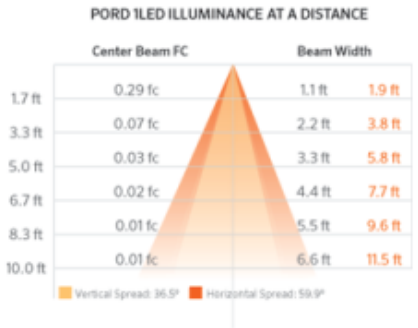



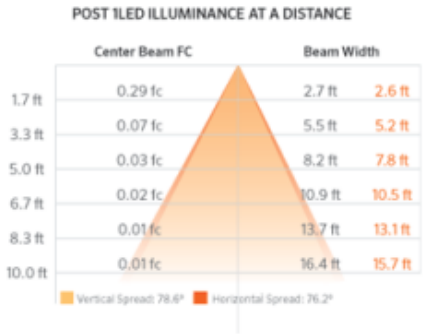

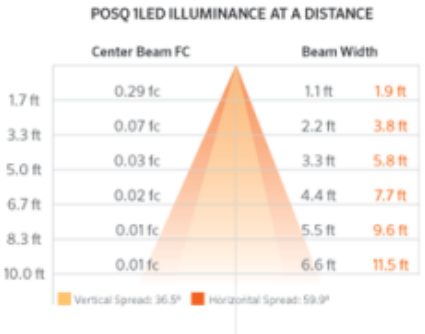

PO Spec Chart

Output	1LED

Total Lumens†‡	45-135
Input Voltage	10 to 15V
Input Power (W)	1.9
VA	2.2
Efficacy (Lumens/Watt)	75
Color Rendering Index (CRI)	83
Max Candela‡	128
Dimming	PWM, Phase**
RGBW Available	No
Luxor Compatibility	
Default	Zoning
ZD Option	Zoning/Dimming
ZDC Option	--
Minimum Rated Life (L70)	L70 (hrs) 72,000

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).
‡ Measured using the Round (RD) faceplate. Multipliers for other faceplates include: 1.0 (Square), 2.0 (Spot), and 0.4 (Wall Wash).
** For optimal performance, use a trailing-edge, phase-cut dimmer.

Required accessory for CE compliance: eKitWall

Model Configurator

PO					
MODEL	LUXOR CONTROL	POWER	LED COLOR	STYLE	FINISH

LUXOR CONTROL

☐ **ZD**
Zone/Dim with Luxor

POWER

- ☐ **1LED**
  2.4 VA

LED COLOR

- ☐ **[Default]**
  Warm (2700K)
- ☐ **S**
  Soft (3000K)
- ☐ **C**
  Cool (4000K)

STYLE

- ☐ **RD**
  Round
- ☐ **SQ**
  Square
- ☐ **ST**
  Spot
- ☐ **WW**
  Wall Wash

FINISH

- ☐ **AB**
  Antique Bronze
- ☐ **BS**
  Natural Brass
- ☐ **BZ**
  Bronze Metallic
- ☐ **FB**
  Black
- ☐ **SB**
  Sedona Brown
- ☐ **DG**
  Desert Granite
- ☐ **WI**
  Weathered Iron
- ☐ **FW**
  Flat White
- ☐ **SV**
  Silver

Accessories

MOUNTING

- ☐ 
  PO-BRKT
  Mounting Bracket for PO Recessed Wall Light
- ☐ 
  eKitWall

POWER

- ☐ 
  MT-6W
  Plug-In Transformer, 6 W
- ☐ 
  ST-UV
  Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD

Surge Protection Module