Evo™ EP-31 Petite Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Ideal for any path or area lighting project, the 15" (387 mm) Evo EP-31 Petite Path Light features a small footprint along with a globe-stye lens and built-in shade reflector for optimum lumen output.


Quick Facts

- Eco-friendly, composite construction minimizes environmental impact
- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Built with UV-tested, corrosion-proof materials to withstand coastal areas with saline environments
- Compatible with the Luxor® Low-Voltage CUBE for powerline zoning and smooth dimming
- Available in a warm (2700K) color temperature

EP-31 Dimensions

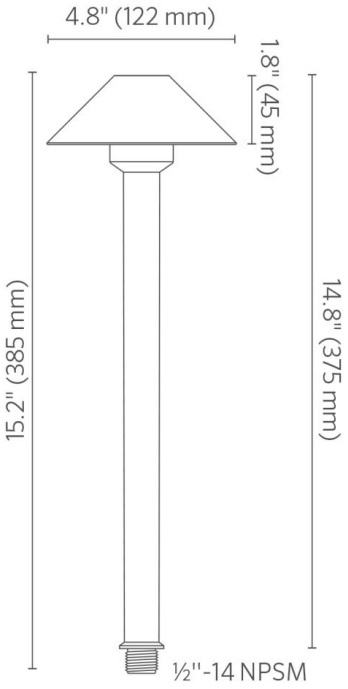

EP-31 Isoilluminance

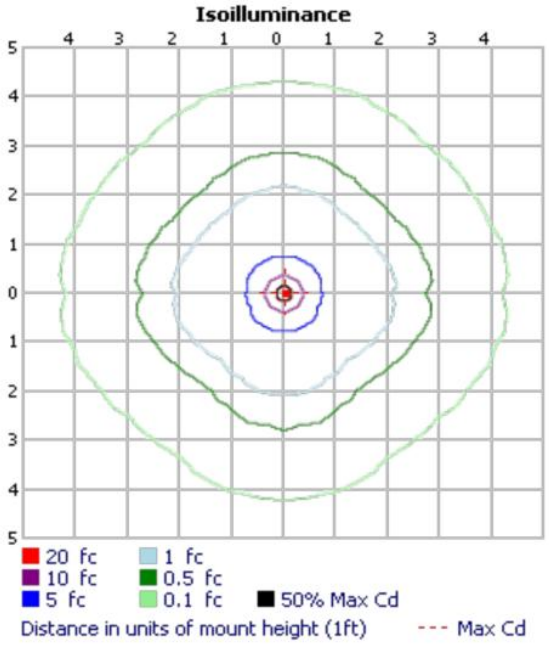

EP-31 SPECIFICATIONS CHART

	E2W
Total Lumens (lm)	56

Input Voltage (VAC/VDC)	10 to 15
Power Consumption (VA)	1.7
Efficacy (lm/W)	47
Color Rendering Index (CRI)	82+
Maximum Candela (cd)	41
Minimum Rated Life (L70)	33,000 Hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Composite
LED	E2
Finish	Black, textured composite
Hardware	Super Slot Spike
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 3' (1 m) measured from the lamp base
Sockets	Socket contains MoistureBlock™ Technology, preventing moisture from wicking up into sealed areas of the fixture.G4 Bi-pin
Weight	0.6 lb (0.25 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)
Lens Transparency	Frosted

SUSTAINABILITY & MANUFACTURING

Sustainability	Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality with 6 recycled water bottles within each Ep-31. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability
Manufacturing	ISO 9001:2015 certified facility

Lifetime	Eco: >30,000 Hrs (L70, B10, TM21 Reported)
Warranty	Fixture: 3-year limited warranty. Included lamp: 3-year limited warranty

LISTINGS

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

EP31					
MODEL	LAMP	LED COLOR	COMPLIANCE	RISER	FINISH

LAMP

☐ **E2**
1.3 VA G4 LED Lamp (Eco Lamp Series)

LED COLOR

☐ **W**
Warm (2700K)

COMPLIANCE

☐ **[Default]**
North America (UL Listed)

☐ **E**
International (CE Certified)

RISER

☐ **12R**
12'' Riser

FINISH

- **BC** Black Composite

Accessories

MOUNTING

-  **PM-XX*** PM — Post Mount
-  **GM-XX*** GM — Ground Mount with ½" Thread
-  **VB-050-XX*** VB-050 — VersaBox® Mount with ½" Thread
-  **753900** — Super Slot Spike
-  **250015840000** — Long Slot Spike
-  **250020020000** — Three-Prong Spike
-  **SJ-XX*** SJ — Super J-Box Spike
-  **PARS** — ProAim® Ratcheting Spike
-  **eKitSpike** — CE Certified Spike

POWER

-  **MT-6W** — Plug-In Transformer, 6 W
-  **ST-UV** — Step-Down Transformer, UV (120/277 V to 12 V)
-  **SURGE-MOD** — Surge Protection Module
-  **LCM-LV** — Luxor Cube - Low-Voltage
-  **ST-HV** — Step-Down Transformer (120V to 12V)
-  **ST-120-DIM** — Step-Down Transformer, Dimmable (120 V to 12 V)

- [ ] 
MT-30W
Mini Plug-In Transformer, 30 W

- [ ] 
DIM-LV
Low-Voltage Dimmer

- [ ] 
DX150M

- [ ] 
DX150SS

- [ ] 
DX300M

- [ ] 
DX300SS

- [ ] 
EX-150-M

- [ ] 
EX-150-SS

- [ ] 
PX-300-SS

- [ ] 
PX-600-SS

- [ ] 
PX-900-SS

SPLICING

- [ ] 
WCHSBS2
Brass Lug Wire Connectors, 2-pack

- [ ] 
WCHSBS50
Brass Lug Wire Connectors, 50-item Bulk Pack

- [ ] 
WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small

- [ ] 
WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium

- [ ] 
WCHSTOOL
Ratcheting Crimper Tool