Designer™ QT Down Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Ideal for tight spaces, the compact QT blends with any home or landscape while providing natural downlighting or subtle accent lighting.


Quick Facts

- Slender luminaire delivers an optimal amount of light exactly where it's needed
- Built with durable, lightweight aluminum housing that withstands any weather condition
- Preinstalled with an extra-long 26' (8 m) wire lead for high and hard-to-reach installations
- Includes field-servicable beam angle lenses from Very Narrow to Wide Flood
- Features ProAim® adjustability with compress-and-lock features to prevent slip after installation and over 220° of vertical adjustability
- Includes Mini Mount wall bracket for easy installation right out of the box
- Built-in angled glare-control for maximum comfort in the space
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning and smooth PWM dimming with the industry-leading Luxor Controller. Available in a warm (2700K) color temperature.
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences

QT Dimensions

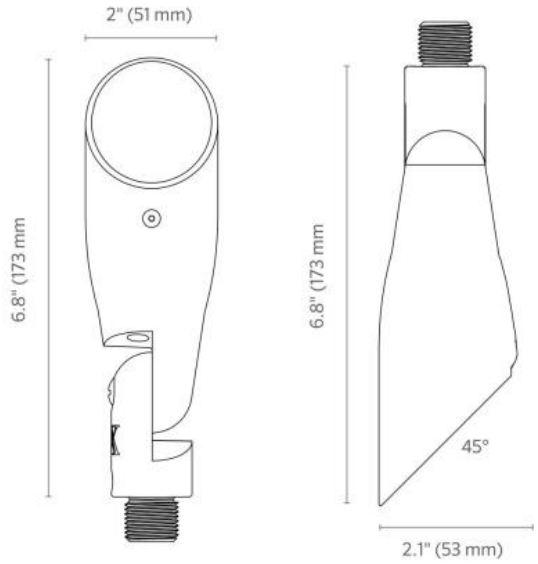

QT Photometrics

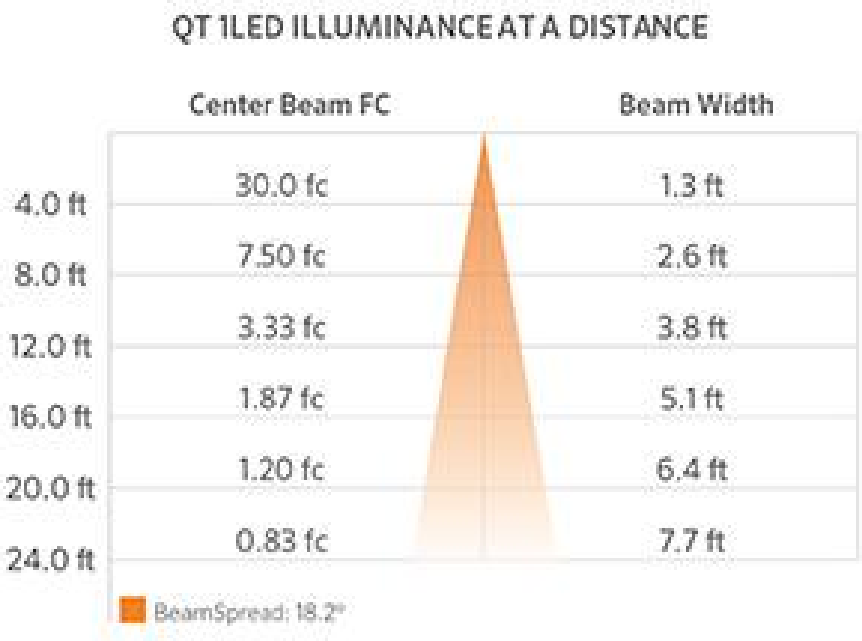

QT Spec Chart

Number of LEDs	1
Total Lumens (lm)	79

Number of LEDs	1
Power Consumption (VA)	2.4
Efficacy (Lumens/Watt)	39
Maximum Candelas (cd)	480
Color Rendering Index (CRI)	82
Beam Angle	WF (60°)
Input Power (W)	2.0
Control	Phase**
Rated Life (L70)	50,000 Hours

** For optimal performance, use trailing edge phase cut dimmer

ADDITIONAL CERTIFICATIONS

CB Scheme, UL 1838

Required accessory for CE compliance: TB-XX

Model Configurator

QT			
MODEL	LUXOR CONTROL	POWER	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor

POWER

- ☐ **1LED** 2.4 VA

FINISH

- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White
- ☐ **SV** Silver

Accessories

MOUNTING

- ☐  **VB-050-XX*** VB-050
  VersaBox® Mount with ½" Thread
- ☐  **MJB-050-XX*** MJB-050
  Mini J-Box for ½" Thread
- ☐  **TB-XX*** TB
  TreeBox® Mount with ½" Thread
- ☐  **WM-XX*** WM
  Wall Mount Knuckle
- ☐  **MM-050-XX*** MM-050
  Mini Mount
- ☐  **WP-1G-050-XX*** WP-1G-050
  Single-Gang Wall Plate with ½" Thread
- ☐  **WP-RD-050-XX*** WP-RD-050
  Round Wall Plate with ½" Thread
- ☐ **YY*-R-XX***
  Aluminum Riser, ¾" Diameter
- ☐  **COUP-XX*** COUP
  Straight Coupling
- ☐  **ELBW-050-XX*** ELBW-050
  90° Coupling
- ☐  **TMNT-050-XX*** TMNT-050
  T-Mount Coupling with ½" Thread
- ☐  **YY*-R-SL-XX***
  Sign Light Riser, Aluminum
- ☐  **YY*-R-GT-XX***
  1.0" (25 mm) Copper Riser for GT Path Light
- ☐  **TR-YY*-8P-XX*** TR
  Tree Ring

POWER



MT-6W

Plug-In Transformer, 6 W



ST-UV

Step-Down Transformer, UV (120/277 V to 12 V)



SURGE-MOD

Surge Protection Module