Modern™ HP-48 In-Grade Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The sturdy, sleek HP-48 Paver Light offers a range of exciting possibilities for creative lighting design in both classic and contemporary applications.

Quick Facts

- Minimal visible hardware for a clean and elegant design, day or night
- Frosted glass lens provides soft, even light distribution
- Factory-sealed construction
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color and dynamic RGBW color-changing options
- Custom recessed installation kit included

HP-48 Dimensions

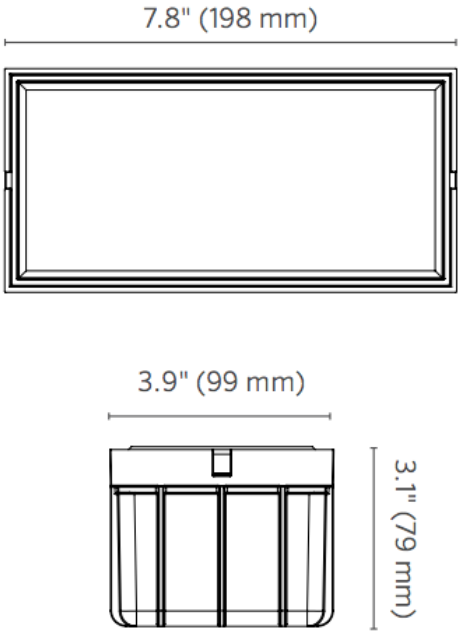

HP-48 Specifications

Output	1LED	ZDC
Total Lumens	17-20	28
Input Voltage	10 to 15V	11 to 15V
Input Power (W)	2.0	3.6
VA	2.4	4.3
Efficacy (Lumens/Watt)	8.5-10	7.8
Color Rendering Index (CRI)	80+	80+
Dimming	PWM, Phase	--
RGBW Available	No	Yes
Luxor Compatibility		
Default	Zoning	--
ZD Option	Zoning/Dimming	--
ZDC Option	--	Zoning/Dimming/Color
Minimum Rated Life (L90 B10)	55,000 Hrs avg	55,000 Hrs avg

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

HP48					
MODEL	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LUXOR CONTROL

- ☐ **ZD** — Zone/Dim with Luxor
- ☐ **ZDC** — Zone/Dim/Color with Luxor

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Default ZDC option 11.0 VA
- ☐ **W** — Warm (2700K)
- ☐ **C** — Cool (4000K)

COMPLIANCE

- ☐ **[Default]** — North America (UL Listed)
- ☐ **E** — International (CE Certified)

FINISH

- ☐ **DS** — Dark Slate