Modern™ M-PZ Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Made with durable die-cast aluminum, the stylish MP-K and MP-Z Path Lights add elegance and sophistication to modern lighting installations.


Quick Facts


- Crafted from sturdy die-cast and extruded aluminum, ensuring resilience and longevity
- Minimal visible hardware for a clean and elegant design, day or night
- Extra-long, standard conduit with stabilizer enables ground mounting in any environment
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences


M-PZ Dimensions

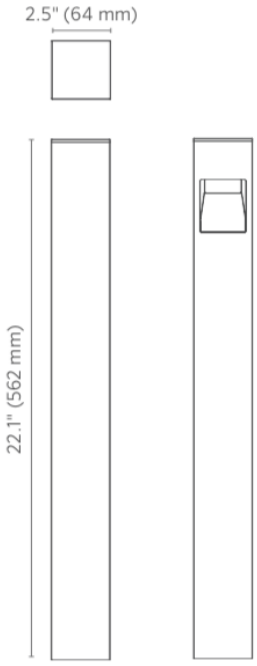

M-PZ Photometrics







M-PZ Spec Chart

Lamp	1LED	3LED	ZDC

Total Lumens*	43	113	60
Input Voltage	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	2.0	4.2	6.0
VA Total	2.4	4.5	7.2
Lumens per Watt (Efficacy)	22	27	10
CRI (Ra)	80+	80+	80+
Max Candela	41	121	43
Dimming	PWM, Phase	PWM, Phase	--
RGBW Available	No	No	Yes
Luxor® Compatibility			
Default	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	Zoning/Dimming/Color
Minimum Rated Life (L90/B10)	55,000 Hrs	55,000 Hrs	55,000 Hrs

*Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Die-cast A380 aluminum body with stainless steel hardware.
Optics	Polycarbonate color temperature adjustment lenses included with luminaire: 2,700K (preinstalled), 3,900K (no lens), 4,500K, and 5,200K. Photometry is calculated using LM-79 method for SSL fixtures.
Finish	Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware	Stainless steel machine screws. Ships with 30" (762 mm) length of 1" (25 mm) conduit for mounting.
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.
Sockets	Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.
Weight	1.0 lb. (0.5 kg)
Ambient Operating Temperature	0°F to 122°F (-18°C to 50°C)

SUSTAINABILITY & MANUFACTURING

Installation Requirements	Designed for installation in the downward lighting direction only.

LISTINGS

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

MPZ					
MODEL	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor
- ☐ **ZDC** Zone/Dim/Color with Luxor

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Warm (2700K)
- ☐ **S** — Soft (3000K)

COMPLIANCE

- ☐  **[Default]** — North America (UL Listed)
- ☐  **E** — International (CE Certified)

FINISH

- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

Accessories

MOUNTING

- ☐  **CSKIT-MPL** — Conduit Stabilizer for M-PJ, M-PK, MP-40, and M-PZ Modern Path Lights