
Modern™ M-PJ Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

Constructed of durable aluminum that stands up to the elements, the MP-J Path Light adds style and functionality to modern installations.


Quick Facts


- Crafted from sturdy die-cast and extruded aluminum, ensuring resilience and longevity
- Extra-long, standard conduit with stabilizer enables ground mounting in any environment
- Driver on Board Technology layout for compact design and fewer components
- Built-in Luxor® Technology enables powerline zoning, smooth dimming, and RGBW color-changing with the Luxor Controller
- Available in static color temperature, wildlife-friendly, and dynamic RGBW color-changing options
- Available in a wide range of powder-coated finishes to suit all exterior designs and preferences


M-PJ Dimensions

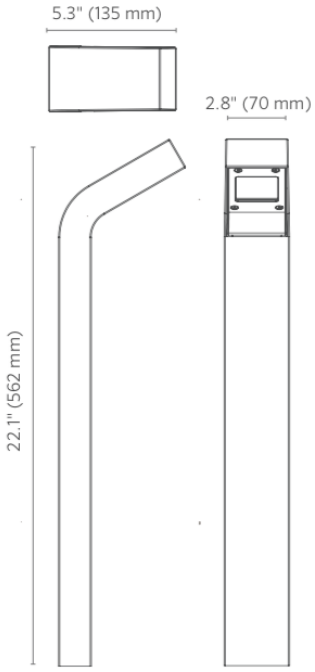


M-PJ Photometrics









M-PJ Spec Chart

Lamp	1LED	3LED	6LED	ZDC
Total Lumens*	100	265	500	185-440

Lamp	1LED	3LED	6LED	ZDC
Input Voltage	10 to 15V	10 to 15V	10 to 15V	11 to 15V
Input Power (W)	2.0	4.0	7.7	9.1
VA Total	2.4	4.4	9.3	11.0
Lumens per Watt (Efficacy)	32	36	28	20
CRI (Ra)	80+	80+	80+	80+
Max Candela	25	62	111	86
Dimming	PWM, Phase	PWM, Phase	PWM, Phase	--
RGBW Available	No	No	No	Yes
Luxor® Compatibility				
Default	Zoning	Zoning	Zoning	--
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	Zoning/Dimming/Color
Minimum Rated Life (L90/B10)	55,000 Hrs	55,000 Hrs	55,000 Hrs	55,000 Hrs

*Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

ADDITIONAL CERTIFICATIONS

UL 1838

Model Configurator

MPJ					
MODEL	LUXOR CONTROL	POWER	LED COLOR	COMPLIANCE	FINISH

LUXOR CONTROL

- ☐ **[Default]** On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** Zone/Dim with Luxor
- ☐ **ZDC** Zone/Dim/Color with Luxor

POWER

- ☐ **1LED** 2.4 VA
- ☐ **3LED** 4.5 VA
- ☐ **6LED** 9.3 VA
- ☐ **[Default]** Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** Warm (2700K)
- ☐ **S** Soft (3000K)

COMPLIANCE

- ☐  **[Default]** North America (UL Listed)
- ☐  **E** International (CE Certified)

FINISH

- ☐ **BZ** Bronze Metallic
- ☐ **FB** Black
- ☐ **SB** Sedona Brown
- ☐ **DG** Desert Granite
- ☐ **WI** Weathered Iron
- ☐ **FW** Flat White
- ☐ **SV** Silver

Accessories

MOUNTING

☐ 

M-PJ-DM-XX* MPJ-DM

☐ 

CSKIT-MPJ

Conduit Stabilizer for MP-J (with ¾" conduit)