Pinnacle™ PP-36 Path Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

The PP-36 combines the versatility of an accent light with the functionality and design of a modern path light for total lighting control.


Quick Facts


- Fully adjustable knuckle directs light where it's needed most, enhancing the beauty of outdoor spaces while increasing the safety and visibility of walkways
- Built-in Luxor® Technology enables powerline zoning, smooth PWM dimming, and RGBW color-changing control options with the industry-leading Luxor Controller
- Durable, premium brass and copper construction offers resilience and longevity
- Straight shroud and a preinstalled hex louver prevent glare and create an inviting atmosphere
- Premium brass Post Mount and machined conduit cap included to provide extra stability for ground mounting in any environment
- Engineered to meet IP67 standards for added peace of mind against the elements

PP-36 Dimensions

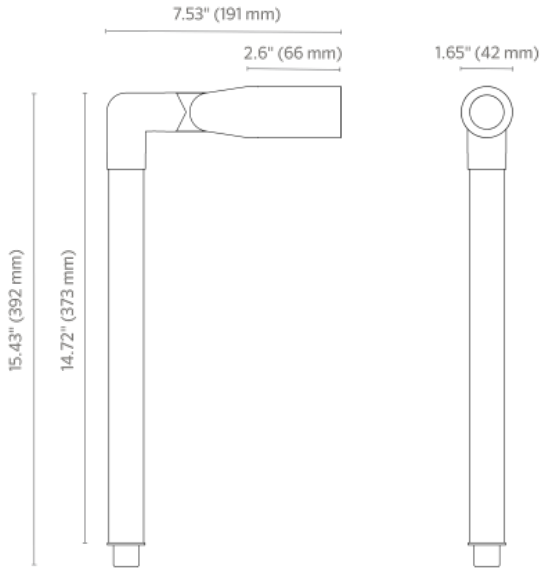

PP-36 Photometrics Chart

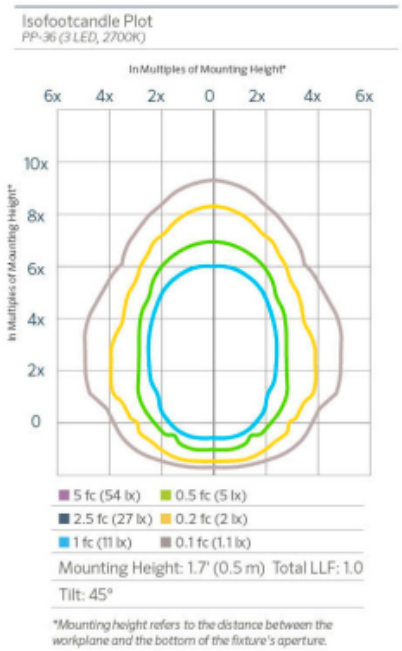

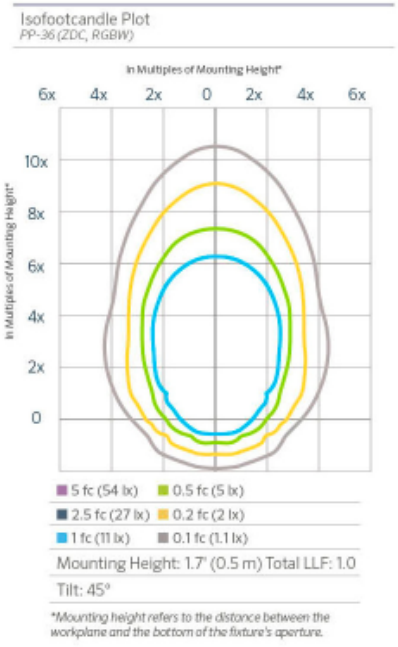

PP-36 Spec Chart

Power	1LED	3LED	ZDC
Light Source	PowerBoard® Integrated LEDs	PowerBoard® Integrated LEDs	PowerBoard® Integrated LEDs

Total Lumens (lm)	120	240	110-260
Input Voltage (V)	10 to 15	10 to 15	11 to 15
Power Consumption (VA)	2.2	4.5	7.2
Correlated Color Temperature (CCT)	2700K 3000K	2700K 3000K Amber (585-595 nm)	RGBW
Efficacy (lm/W)	59	62	30
Color Rendering Index (CRI)	83+	83+	-
Maximum Candela (cd)	-	810	450
Beam Angle	60° (pre-installed) 35° (included accessory)	60° (pre-installed) 35° (included accessory)	60° (pre-installed) 35° (included accessory)
Luxor Compatibility			
Powerline Zoning (Z)	Default	Default	Default
Smooth PWM Dimming (D)	-	ZD	ZD
RGBW Color-Changing (C)	-	-	ZDC
Minimum Rated Life (L70/B10)	72,000 hrs	72,000 hrs 55,000 hrs (Amber)	55,000 hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

Materials	Brass, copper
Optics	Field-serviceable 60° beam angle lens is pre-installed. A 35° lens is included with the product.
Threads	½"–14 NPSM
Adjustability	Compress-and-lock features prevent slips after installation. Offers 9° increments of adjustability over 220° of vertical alignment.

Finish	Options of powder coat, natural brass finish, or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Powder-coat finishes sealed with polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards. Antique finishes sealed with a clear TGIC powder-coat layer.
Hardware	Brass and stainless steel fasteners
Wiring	18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture
Sockets	Socket contains MoistureBlock™ Technology to prevent moisture from wicking up into sealed areas of the fixture
Glare Control	1" straight shroud, MR-11 hex louver
Weight	4 lb (1.8 kg)
Ambient Operating Temperature	0°F to 140°F (-18°C to 60°C)
Lens Transparency	Clear for 1 LED/3 LED/ZD options. Frosted for ZDC option

SUSTAINABILITY & MANUFACTURING

Sustainability	Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high quality light at optimal energy efficiency, lifespan, and durability.
Installation Requirements	Designed for installation in the upward or downward lighting directions.
Manufacturing	ISO 9001:2015 certified facility
Warranty	Fixture: 10-year limited warranty

LISTINGS

Model Configurator

PP36					
MODEL	LUXOR CONTROL	POWER	LED COLOR	RISER	FINISH

LUXOR CONTROL

- ☐ **[Default]** — On/Off | Phase Dimmable | Zone with Luxor
- ☐ **ZD** — Zone/Dim with Luxor
- ☐ **ZDC** — Zone/Dim/Color with Luxor (Medium Round 3 LED)

POWER

- ☐ **1LED** — 2.4 VA
- ☐ **3LED** — 4.5 VA
- ☐ **[Default]** — Default ZDC Option 6.0W/7.2VA

LED COLOR

- ☐ **[Default]** — Default ZDC option 11.0 VA
- ☐ **W** — Warm (2700K)
- ☐ **S** — Soft (3000K)
- ☐ **T** — Wildlife-Friendly (585 to 595 nm)

RISER

- ☐ **18R** — 18'' Riser
- ☐ **24R** — 24'' Riser

FINISH

- ☐ **AB** — Antique Bronze
- ☐ **BS** — Natural Brass
- ☐ **BZ** — Bronze Metallic
- ☐ **FB** — Black
- ☐ **SB** — Sedona Brown
- ☐ **DG** — Desert Granite
- ☐ **WI** — Weathered Iron
- ☐ **FW** — Flat White
- ☐ **SV** — Silver

Accessories

MOUNTING

- ☐  **PM-XX*** PM
  Post Mount
- ☐  **VB-050-XX*** VB-050
  VersaBox® Mount with ½" Thread
- ☐  **250015840000**
  Long Slot Spike
- ☐  **250020020000**
  Three-Prong Spike
- ☐  **SJ-XX*** SJ
  Super J-Box Spike
- ☐  **PARS**
  ProAim® Ratcheting Spike
- ☐  **eKitSpike**
  CE Certified Spike
- ☐  **LNM**

POWER

- ☐  **SURGE-MOD**
  Surge Protection Module
- ☐  **DIM-LV**
  Low-Voltage Dimmer

SPLICING

- ☐  **WCHSBS2**
  Brass Lug Wire Connectors, 2-pack
- ☐  **WCHSBS50**
  Brass Lug Wire Connectors, 50-item Bulk Pack
- ☐  **WCHSSM20**
  Heat Shrink Wire Connectors, 20-pack, Small
- ☐  **WCHSMD20**
  Heat Shrink Wire Connectors, 20-pack, Medium