Cora™ CL-L Ledge Light



PROJECT NAME

TYPE

CATALOG #

QUANTITY


NOTES

This compact ledge light is a perfect addition to lighting projects with modest budgets. Because of its corrosion-resistant construction, it's the ideal choice for humid regions.

Quick Facts

- Select brass construction and black oxide stainless steel hardware delivers strong corrosion resistance, increased durability, and an elegant look
- Factory-sealed construction
- Compatible with the Luxor® Low-Voltage CUBE for powerline zoning and smooth dimming
- Available in a warm (2700K) color temperature
- Antique bronze finish provides increased durability and elegant look

CL-L Dimensions

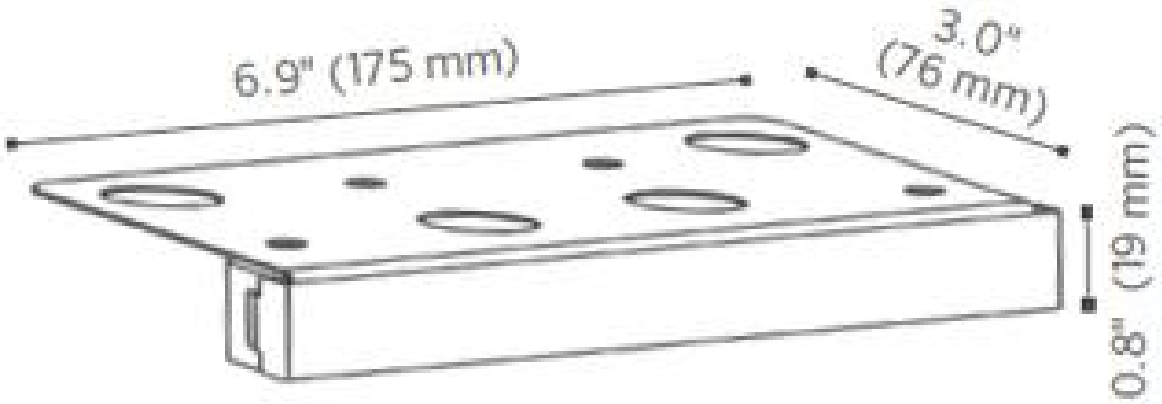

CL-L 20W Photometrics

C-LL20LED Illuminance at a Distance

Feet (Meters)	Center Beam	Beam Width	
	Foot-Candle (Lux)	Vertical 112.5°	Horizontal 111.2°
4' (1.2 m)	3.3 fc (36 lx)	12.0' (3.7 m)	11.7' (3.6 m)
8' (2.4 m)	0.8 fc (9 lx)	24.0' (7.3 m)	23.4' (7.1 m)
12' (3.7 m)	0.4 fc (4 lx)	35.9' (10.9 m)	35.1' (10.7 m)
16' (4.9 m)	0.2 fc (2 lx)	47.9' (14.6 m)	46.7' (14.2 m)
20' (6.1 m)	0.1 fc (1 lx)	59.9' (18.3 m)	58.4' (17.8 m)
24' (7.3 m)	0.1 fc (1 lx)	71.9' (21.9 m)	70.1' (21.4 m)

CL-L Spec Chart

OUTPUT	Integrated LED

Total Lumens	151
Input Voltage	10 to 15V
Input Power (W)	4.0
VA	4.2
Efficacy (Lumens/Watt)	37
Color Rendering Index (CRI)	80+
Center Beam Candlepower	--
Dimming	PWM, Phase
RGBW Available	No
Luxor Compatibility	
Default	--
ZD Option	--
ZDC Option	--
Minimum Rated Life (L70)	33,000 Hrs

Technical Specifications

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

CONSTRUCTION

LED	LED20

ADDITIONAL CERTIFICATIONS

RoHS COMPLIANT

UL 1838

Model Configurator

CLL			
MODEL	LAMP	LED COLOR	FINISH

LAMP

- ☐ **LED20**
  1.3 VA G4 Lamp (20W equivalent Lamp)

LED COLOR

- ☐ **W**
  Warm (2700K)

FINISH

- ☐ **AB**
  Antique Bronze

Accessories

POWER

- ☐  **MT-6W**
  Plug-In Transformer, 6 W
- ☐  **ST-UV**
  Step-Down Transformer, UV (120/277 V to 12 V)
- ☐  **SURGE-MOD**
  Surge Protection Module
- ☐  **LCM-LV**
  Luxor Cube - Low-Voltage
- ☐  **ST-HV**
  Step-Down Transformer (120V to 12V)
- ☐  **ST-120-DIM**
  Step-Down Transformer, Dimmable (120 V to 12 V)



MT-30W
Mini Plug-In Transformer, 30 W



DIM-LV
Low-Voltage Dimmer

SPLICING



WCHSBS2
Brass Lug Wire Connectors, 2-pack



WCHSBS50
Brass Lug Wire Connectors, 50-item Bulk Pack



WCHSSM20
Heat Shrink Wire Connectors, 20-pack, Small



WCHSMD20
Heat Shrink Wire Connectors, 20-pack, Medium