



DETAIL LEGEND

- ① FX Luminaire PO-SQ fixture. See plan legend for wattage, beam spread and accessories.
- ② Stucco / drywall wall within landscape. See plans and landscape details for type of construction material.
- ③ 2 X 4 wall stud.
- ④ $\frac{3}{4}$ " electrical conduit per local code.
- ⑤ Direct bury, UF/UL, copper, low voltage cable with 3M DBR/Y-6 direct bury splice kit. Leave 18" minimum wire loop coiled below fixture for service.
- ⑥ Use FX provided conduit included with fixture or standard $1\frac{1}{2}$ " conduit.

NOTES

- A. Installation to be completed in accordance with manufacturer's specifications.
- B. Accepts 10-15 volts - AC or DC
- C. See plan legend for LED board option, beam spreads, and accessories.
- D. Always refer to FX product installation notes prior to installation.

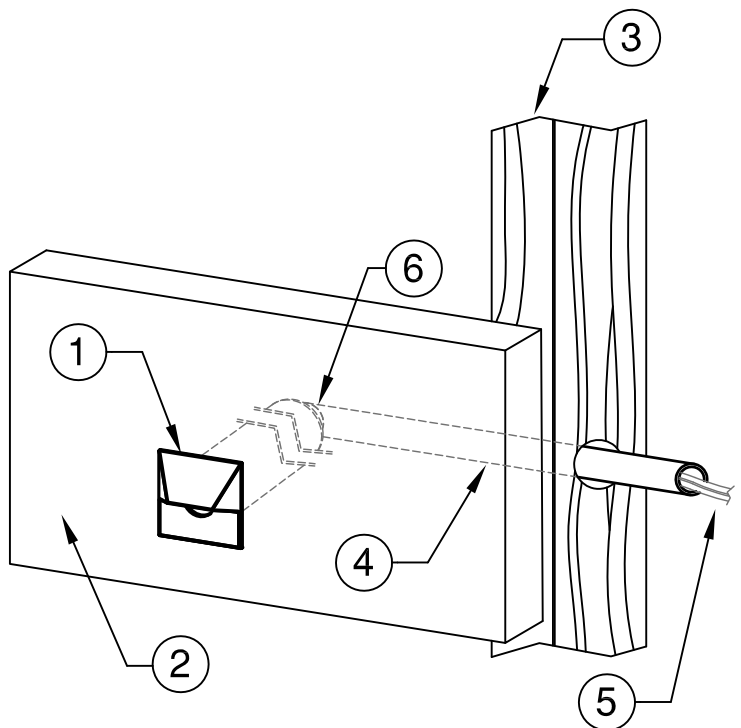

PO-SQ WALL WASH STUCCO / DRYWALL

NOT TO SCALE