
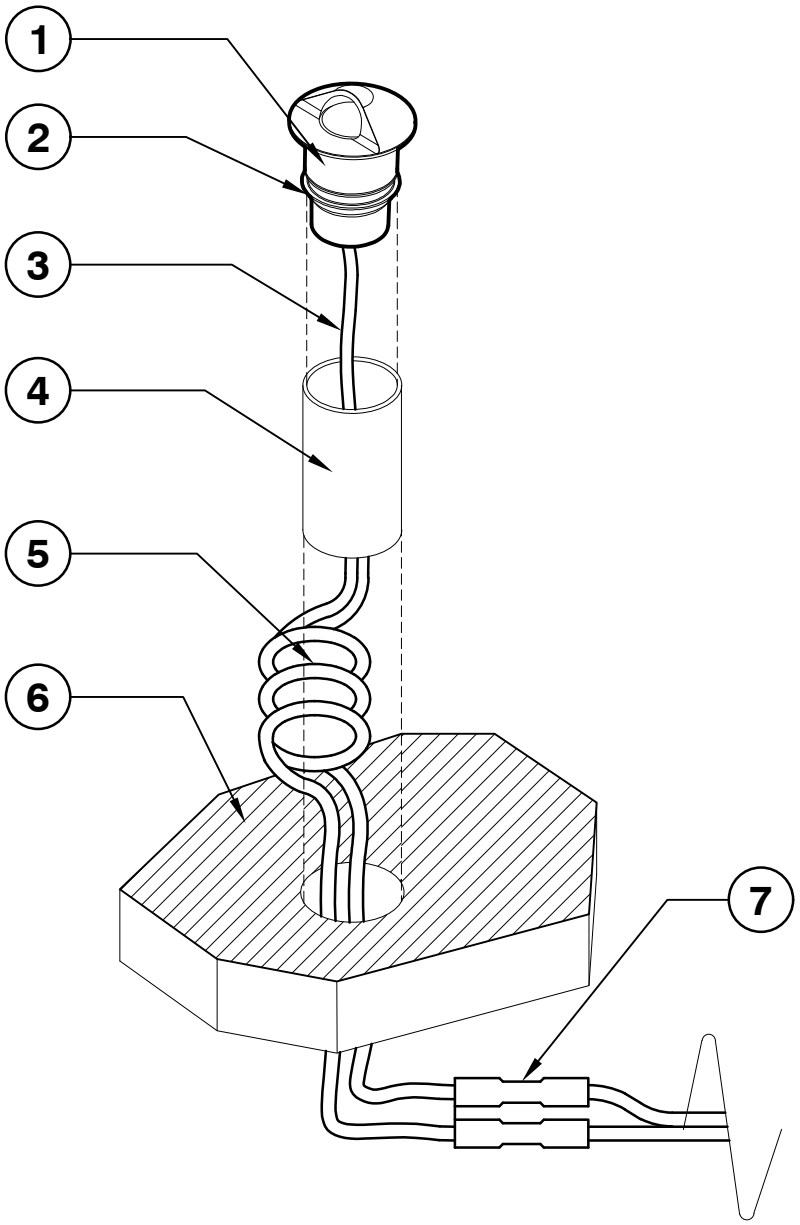


LEGEND:

1. FX LUMINAIRE CN-51, FACEPLATE PER PLAN
2. GASKET
3. POWER FEED
4. 2 1/2" (635 mm) SCH. 40 OR SDR-21 PVC CONDUIT
5. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 6 in. (150 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE
6. HARDSCAPE SURFACE
7. HEAT SHRINK CONNECTION

NOTE:

CORE SIZE TO BE 2.5 in. (63.5 mm) FOR USE WITHOUT CONDUIT



HEAT SHRINK CONNECTION

00 FX LUMINAIRE CN-51 RECESSED LIGHT

NOT SCALE